

EFFECT OF Al_2O_3 FILLER ON MECHANICAL BEHAVIOUR ACRYLIC FILMS

Abstract— In order to improve the mechanical properties of acrylic films, Poly methyl-methacrylate (PMMA)/Aluminum oxide (Al_2O_3) films are prepared following solution casting technique. The mechanical behavior of prepared films has been analyzed by employing Ultrasonic Pulse Echo method. The morphology of films is examined via XRD and SEM analysis. The synergetic effect is observed in films from obtained ultrasonic data. The elastic modulus is calculated and compared for better utilization.

Index Terms— Ultrasonic Pulse Echo, thin films, XRD, Solution casting technique.

I. INTRODUCTION

In order to fulfill the requirements of polymer industry many fabricators usually blend polymers together in order to reach an optimum balance of properties, this approach allows high flexibility in property adjustment and avoids development of new macromolecules which is generally long and expensive compared to polymer alloying¹. Vigorous developments of polymer composite and extensive utilization of polymer materials in technology have led to the polymer composites². Recently polymer matrix-ceramic filler composites receive increased attention due to their interesting electrical and electronic properties, integrated decoupling capacitors, angular acceleration accelerometers and acoustic emission sensors are some potential applications. Ceramic materials are typically brittle, possess low dielectric strength and in many cases are difficult to be processed requiring high temperature. On the other hand, polymers are flexible, can be easily processed at low temperatures and exhibit high dielectric break down fields. The present work deals with the effect of alumina as filler on the mechanical properties of poly-methyl methacrylate films³⁻⁸.

II. EXPERIMENTAL WORK

A. Sample Preparation

Poly(methyl methacrylate) (PMMA) (Molecular weight $M_w=1,20,000$, purity 99 %), Al_2O_3 , and Acetone were obtained from S.D. Fine Chem. Ltd, Mumbai, India and used as received without further purification. The Citizen electronic balance of accuracy 10^{-4} has been used to measure weight amount of alumina powder and polymer powder. The composite films of 10, 20, 30, 40, 50 and 60 weight percent (Wt %) of Al_2O_3 are obtained by mixing it with the PMMA solution in acetone. It were then dried at 450 C and kept under oven for 4H before use. The solution were cast as films and allowed to evaporate at ambient temperature and at atmospheric pressure. After evaporation of acetone, the films were further dried in a temperature –controlled oven at 65°C for 3H to remove any remaining traces of acetone.

Density ρ of all thin films was determined by employing the Archimedes Principle using water as immersion liquid and applying the relation equation (1)

$$\rho = \frac{1}{W_1 - W_2} \rho_w \quad (1)$$

Where W_1 and W_2 are the weights of the thin films in air and in the immersion liquid respectively. ρ_w is the density of water.

III. CHARACTERIZATION

A. Structural characterization

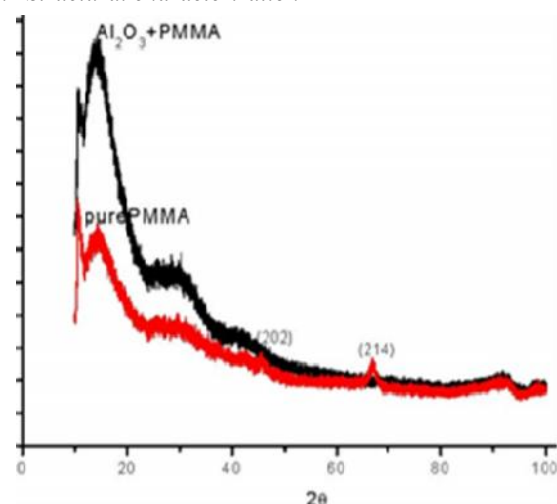


Fig.1 XRD of PMMA and PMMA/ Al_2O_3

The XRD spectrum for polymer composite film of PMMA with Al_2O_3 is given in Fig. 1. The appearance of sharp peaks indicates that sample possessed micro crystals also.

In case of composite films of PMMA with Al_2O_3 the micrographs are given in Fig. 2(a-d). The micrographs are given in different magnifications such as (a) 10 k x, (b) 25 k x, (c) 50 k x and (d) 200 k x. The sizes of the particles in this composite film are 55, 325, 350 and 455 nm.

It also suggests that size of the particles formed in polymer composites are non-spherical in shape which could be seen from FESEM image.

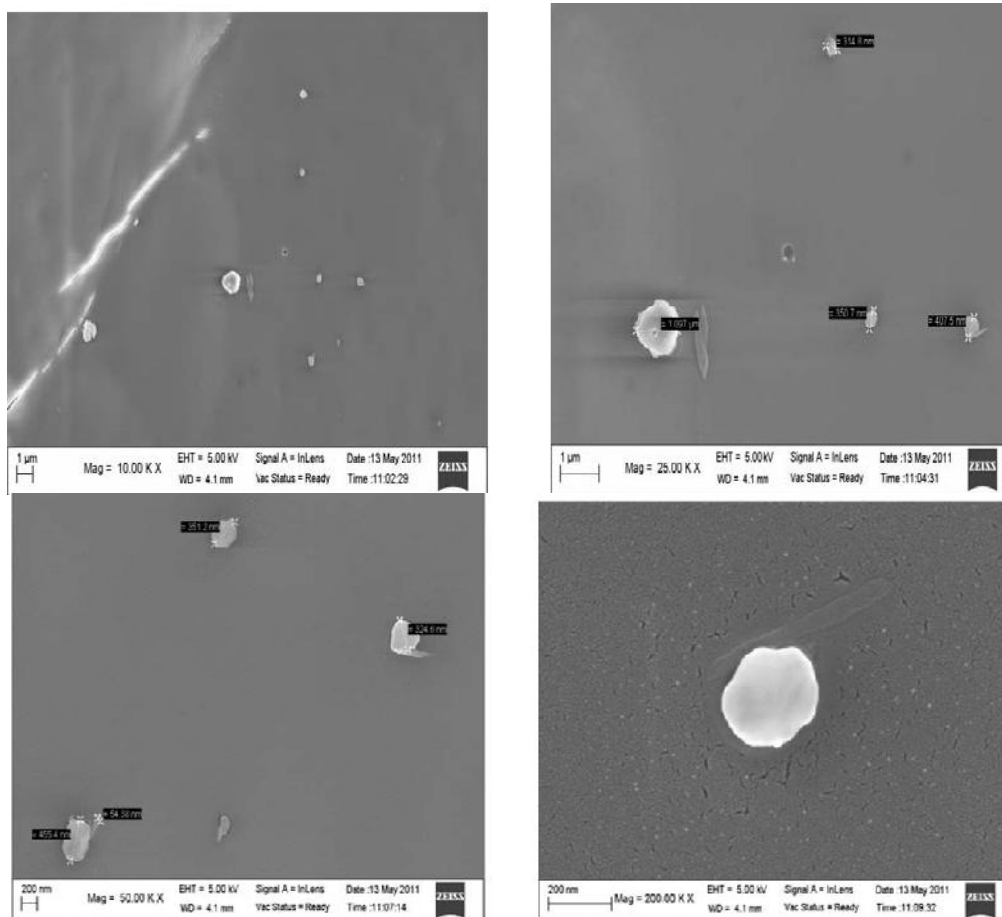


Fig. 2 (a), (b), (c) and (d) FESEM of PMMA/Al₂O₃

B. Ultrasonic Characterization

The ultrasonic velocity and absorption are measured following Ultrasonic pulse echo technique using Pulsar Receiver MHF400 in gated mode with an accuracy of ± 1 m/s.

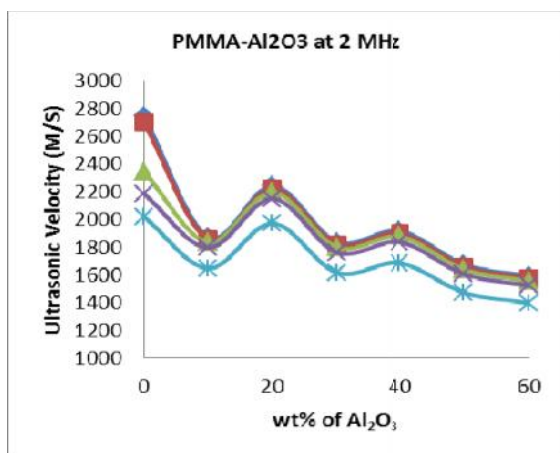


Fig. 3 Variation of ultrasonic velocity at 2MHz

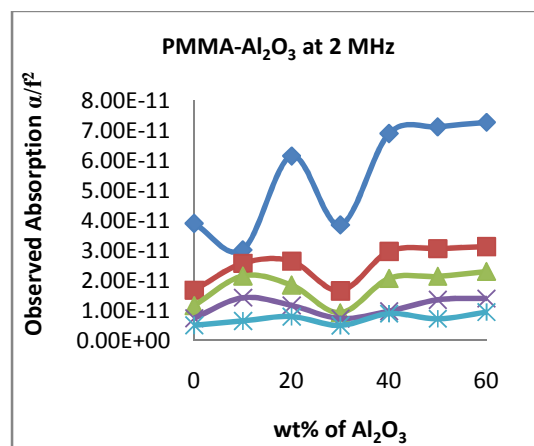


Fig. 4 Variation of Observed absorption at 2MHz

The operating frequency is 2MHz from longitudinal wave transducer.

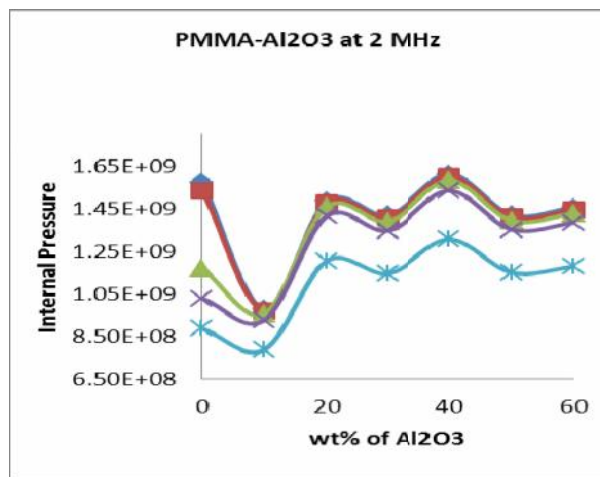


Fig. 5 Variation of Internal Pressure with Al_2O_3 conc.

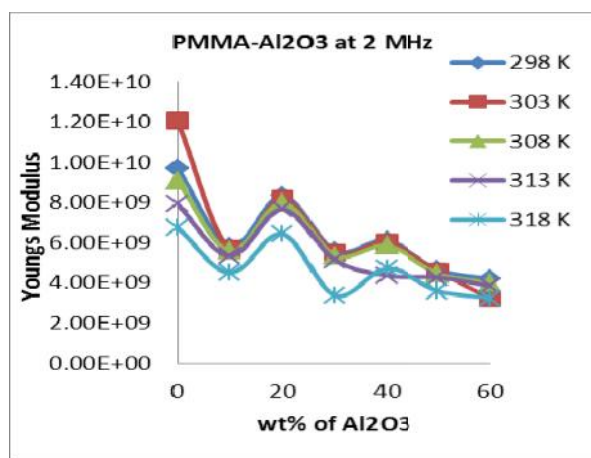


Fig. 6 variation of youngs modulus Al_2O_3 conc.

IV. CONCLUSION

The composition of PMMA/ Al_2O_3 shows mechanical properties as follows.

The XRD and FESEM of the prepared samples show non-spherical shape. The sizes of the particles in this composite film are 50-450 nm.

Ultrasonic velocity decreases with increase in concentration of Al_2O_3 promote dissociation of molecules except at 20% Al_2O_3 .

These facts can be related as follows

As Wt% of Al_2O_3 in PMMA increases, the Dissociation of molecules occurs, this reduces ultrasonic velocity. At 20% Al_2O_3 the acceptance of additive entity is found more and hence young's modulus increased at that concentration. The internal pressure increases with the increase in filler quantity supports the compactness and size dependent absorbing capacity of acrylic materials.

REFERENCES

- [1] Ahmed Hashim, "Optical Constants for (PVA-PEG- $\text{Al}_2(\text{SO}_4)_3$) Composites," Chemical and Materials Engineering, vol. 2(2), pp. 47-49, 2014.
- [2] Wenderlinch B., "Macromolecular Physics", Academic press, New York, (1973).
- [3] Comelio P., "Applications of polymer composites," polymer preprints., vol. 32, no. 2, pp. 17-21, 1996.
- [4] Bahaa Hussien, "The D.C and A.C Electrical Properties of (PMMA - Al_2O_3) Composites," European Journal of Scientific Research, vol. 52, issue 2, pp. 236-242, 2011.
- [5] Nikolay Bulychev, "Nanostructural characteristics of polymer adsorption layers formed under ultrasonic treatment on metal oxides surface in aqueous dispersions," Journal of chemistry and chemical technology, vol. 5, issue 4, pp. 389-396, 2011.
- [6] Francesca Lionetto, "Polymer characterization by ultrasonic wave propagation," Advances in Polymer Technology, vol. 27, issue 2, pp. 63-73, 2008.
- [7] Ahmed Omran Alhareb, "Effect of $\text{Al}_2\text{O}_3/\text{ZrO}_2$ reinforcement on the mechanical properties of PMMA denture base," Journal of Reinforced Plastics and Composites, vol. 30, issue 1, pp. 86-93, 2011.
- [8] S. Chen, B. Mulgrew, and P. M. Grant, "A clustering technique for digital communications channel equalization using radial basis function networks," IEEE Trans. on Neural Networks, vol. 4, pp. 570-578, July 1993.
- [9] J. U. Duncombe, "Infrared navigation—Part I: An assessment of feasibility," IEEE Trans. Electron Devices, vol. ED-11, pp. 34-39, Jan. 1959.
- [10] C. Y. Lin, M. Wu, J. A. Bloom, I. J. Cox, and M. Miller, "Rotation, scale, and translation resilient public watermarking for images," IEEE Trans. Image Process., vol. 10, no. 5, pp. 767-782, May 2001.