

COMPUTER AIDED SYSTEM FOR UNI-FUNCTIONAL JOB SHOP MACHINE SELECTION BASED ON PRODUCTION COST AND TECHNOLOGY ADVANCEMENT.

BY

Basil O. Akinnuli¹, Yakubu A. Anakobe² and Adeyemi A. Aderoba³

Federal University of Technology,
Department of Mechanical Engineering,
Akure, Nigeria.

E-mail: ifembola@yahoo.com¹, yakubqiblah@yahoo.com²

ABSTRACT

Cost of production in manufacturing industries is very vital. It is the major determinant of profit level a company will attain. If left on controlled, it easily take away profits and the company economy will be in hazard. This production cost can be controlled during purchasing of materials to be used, equipment required for processing raw materials and required services of man power. But when it comes to processing of material (job processing) which has alternative means of producing the required product(s) there are machines competing for the job(s) and machine that will do the job economically at low cost out of the existing alternatives must be wisely selected. This study hence, developed decision rules models for selecting machine that will give optimum production cost considering alternatives available based on technology advancement of the machines. The specification of the machines used are hereby stated: swing of machines is 406mm, distance between centres is 762mm, speed of electric motor is 1800 rpm while the power of the motor is 15 Horse power. The material machined was mild steel while the cutting speed used is high speed steel. The depth of cut for rough cutting was 3mm at the speed of 12m/mins while the depth of cut for finish cutting was 0.4mm at the speed of 240m/mins. The strategic decisions used are: fixed cost, variable cost, and break-even point between alternatives. Computer software was developed using Microsoft Visual Basic programming language. These models and the developed software were tested using Don Bosco Technical College Ondo as case study where the machines are available with same specification but difference in technology (manually, semi-automatic and automatic). The results were highly promising for decision making and will find it's applications in Job-shop industries, institutions with production basis, mechanical and manufacturing workshops that production cost for selection of machines affects their production in both developed and developing countries.

Keyword: Machine Selection, Modeling, Production Cost, Software Development, Strategic decisions, Uni-Functional.

1. INTRODUCTION

A lathe machine is considered as cost effective equipment that can be used to perform repetitious, difficult and unsafe manufacturing tasks with high degree of accuracy. Selection of proper machine tool is one of the important issues for achieving high competitiveness in the global market. The main advantage of selecting a proper machine tool lies not only in: increased production and delivery, improved product quality and increased product flexibility. But also low production cost which will increase profit. Evaluation and selection of a machine tool is a complex decision-making problem involving multiple conflicting criteria, such as fixed cost, variable cost and brake even point between alternatives (Martand, 2006).

Historically, Jain (2006) and AIPD (1988) gave details about lathe machine development and it's methods of operation till date. Akinnuli (2009) developed models for machinery evaluation before procurement using goal programming methods. Analysis of the benefits generated by using fuzzy numbers in a TOPSIS model developed for machine tools selection problems was carried out by Yurdalu and Lcy (2009) as well as Vijay and Shanker (2010). The Fuzzy approach was used also by

Ayag and Ozdemir (2006a); Chan *etal*(2005);Mishra *et al*, (2006) and Onutet *al.*, (2008) by using different models for decision making.

Atmani and Lashkari (1998), developed a model for machine tool selection and operational location. Angligi (2008) from University of Malaysia Pahang determined Lathe machine cutting speed for different materials. Chan and Swarnaka (2006) and Vienna (2005) went further to develop anti colony optimization models to a fuzzy goal programming for a machine tool selection and operation allocation in a Flexible Manufacturing System (FMS).

Machine tool selection and operational location in FMS was carried out by Rai *et al.*, (2002). Yurdalul (2004) make used of analytical hierarchy process as a strategic decision-making tool to justify machine tool selection which is a great improvement on the work of Saaty (1980). Rao (2007) made use of Graph theory and Fuzzy multiple-attribute decision methods for decision making in the manufacturing environment. An intelligent approach to machine tool selection through Fuzzy analytic network process was ascribed to the effort of Ayag and Ozdemir (2006b); Duran and Aguilo (2008); Sharma (2006) and Sun (2002).

These models are yet to address both the production cost and technological advancement as aid for machine selection for profitability. Hence the development of machine selection models based factors such as fixed cost, variable cost and breakeven point for decision making.

METHODOLOGY

This research presents a logical and systematic procedure to evaluate and select appropriate lathe machine for optimum production cost implication: Manually operated Lathe (MO), Semi-Automatic Lathe (SAM) and Automatic Lathe (AM) Machines were considered in terms of break-even point, fixed cost, variable cost, set up time, process time, tooling cost, labour cost and depreciation rate. These strategic decisions were taken into consideration in order to arrive at the best decision as regarding selection of the proper lathe machine that will perform the job on job floor. Not all these machines (manual, semi-automatic, and automatic will be available in all Job-shop, hence the development of four (4) scenarios for these models application. The specification of the machines used are hereby stated: swing of machines is 406mm, distance between centres is 762mm, speed of electric motor is 1800 rpm while the power of the motor is 15 Horse power. The material machined was mild steel while the cutting speed used is high speed steel. The depth of cut for rough cutting was 3mm at the speed of 12m/min while the depth of cut for finish cutting was 0.4mm at the speed of 240m/min.

Model Development

Break-even point (BEP) model was adopted for comparing alternatives. It was adopted based it's ability to express cost of alternative as function of a common independent variable and will be of the form:

$$(TC)_1 = f_1(x): (TC)_2 = f_2(x) \quad (1)$$

where: $(TC)_1$ = Total cost per time period, per project or per piece for alternative 1;

$(TC)_2$ = Total cost per time period, per project or per piece per alternative 2.

At the Break – Even point (BEP),

$$(TC)_1 = (TC)_2 \quad (2)$$

$$f_1(x) = f_2(x) \quad (3)$$

Mathematically, the above discussion can be written as:

$$FC_1 + QVC_1 = FC_2 + QVC_2 \quad (4)$$

From the above relation in Equation (4) the break-even quantity (Q) is determined thus.

$$Q = \frac{FC_2 - FC_1}{VC_1 - VC_2} \quad (5)$$

Where: Q = the break even quantity, FC_1 = Fixed cost of the 1st machine,

FC_2 = fixed cost of the 2nd machine; VC_1 = variable cost of the 1st machine and VC_2 = variable cost of the 2nd machine.

Strategic Decisions Used:

The strategic decisions used are: Set up time (S_t); Processing time (P_t); Tooling up cost (C_T); Labour cost (L_C); Depreciation (D); Fixed cost (FC) and Variable cost (VC).

Fixed cost (FC) Determination

Fixed Cost (FC) = Set up cost + Tooling up cost

$$F_c = S_t + C_T \quad (6)$$

This is also number of Set-up/year x Set up time /Set up (hrs) [Set-up labour rate + (Depreciation and other expense/hr)] + Tooling up costs.

$$FC_1 = S_{ty} \times S_t / S_{th} [(S_{cr}) + (D + O_c / \text{hr})] + C_T \quad (7)$$

Scenario I: This is used when manual and semi-automatic machine are available, (MO) versus (SAM) competing for jobs.

Scenario II: This is used when manually operated and Automatic machine are available (MO versus AM) competing for jobs.

Scenario III: This is used when semi-automatic and automatic machines are available in the Job shop (SAM Vs AM) competing for Job.

Scenario IV: This is used when all the three machines Manually operated Semi-automatic and Automatic machines (MO, SAM and AM) are competing for the available job.

Variable cost (VC₁) Determination

The variable Cost VC = Processing time x [Labour cost/hr + Depreciation and other cost/hr]

$$VC_1 = P_1 [(L_{ch} + D + O_{ch})] \quad (8)$$

Break-Even Quantity (BEQ) Determination

The quantity at which both alternatives gives equal cost(N) (BEQ) $N = \text{Fixed cost difference} / \text{variable cost difference}$

$$N = \frac{\Delta F}{\Delta V} = \frac{FC_2 - FC_1}{VC_1 - VC_2} \text{ or } \frac{FC_1 - FC_2}{VC_2 - VC_1} \quad (9)$$

Determination of Total cost (TC)


TotalCost = Fixed Cost + (Variable Cost/Unit x Number of units)

$$TC = FC + [VC_u \times N] \quad (10)$$

Case study

Development of the Component to be Manufacture and it's Geometry

The component in Fig. 1 is to be produced by Don Bosco Technical College's production workshop for the need

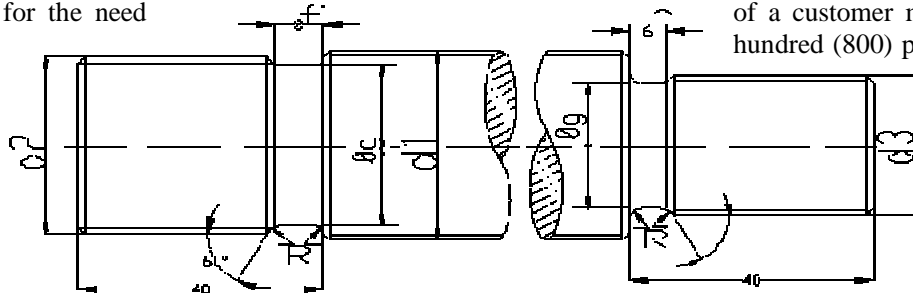

of a customer making requisition for eight hundred (800) pieces which will last for his one year period of operation. Which of the alternatives lathe machine: MO; SAM, or AM will economically be selected for this job based on this quantity required.

This case study was to test the possible four scenarios available under this study which are: MO versus SAM; MD versus AM; SAM versus AM and comparing the three machines MO, SAM and AM at same time.

Components

Fig.1: Geometry of component machining operations.

Software Flowchart Development

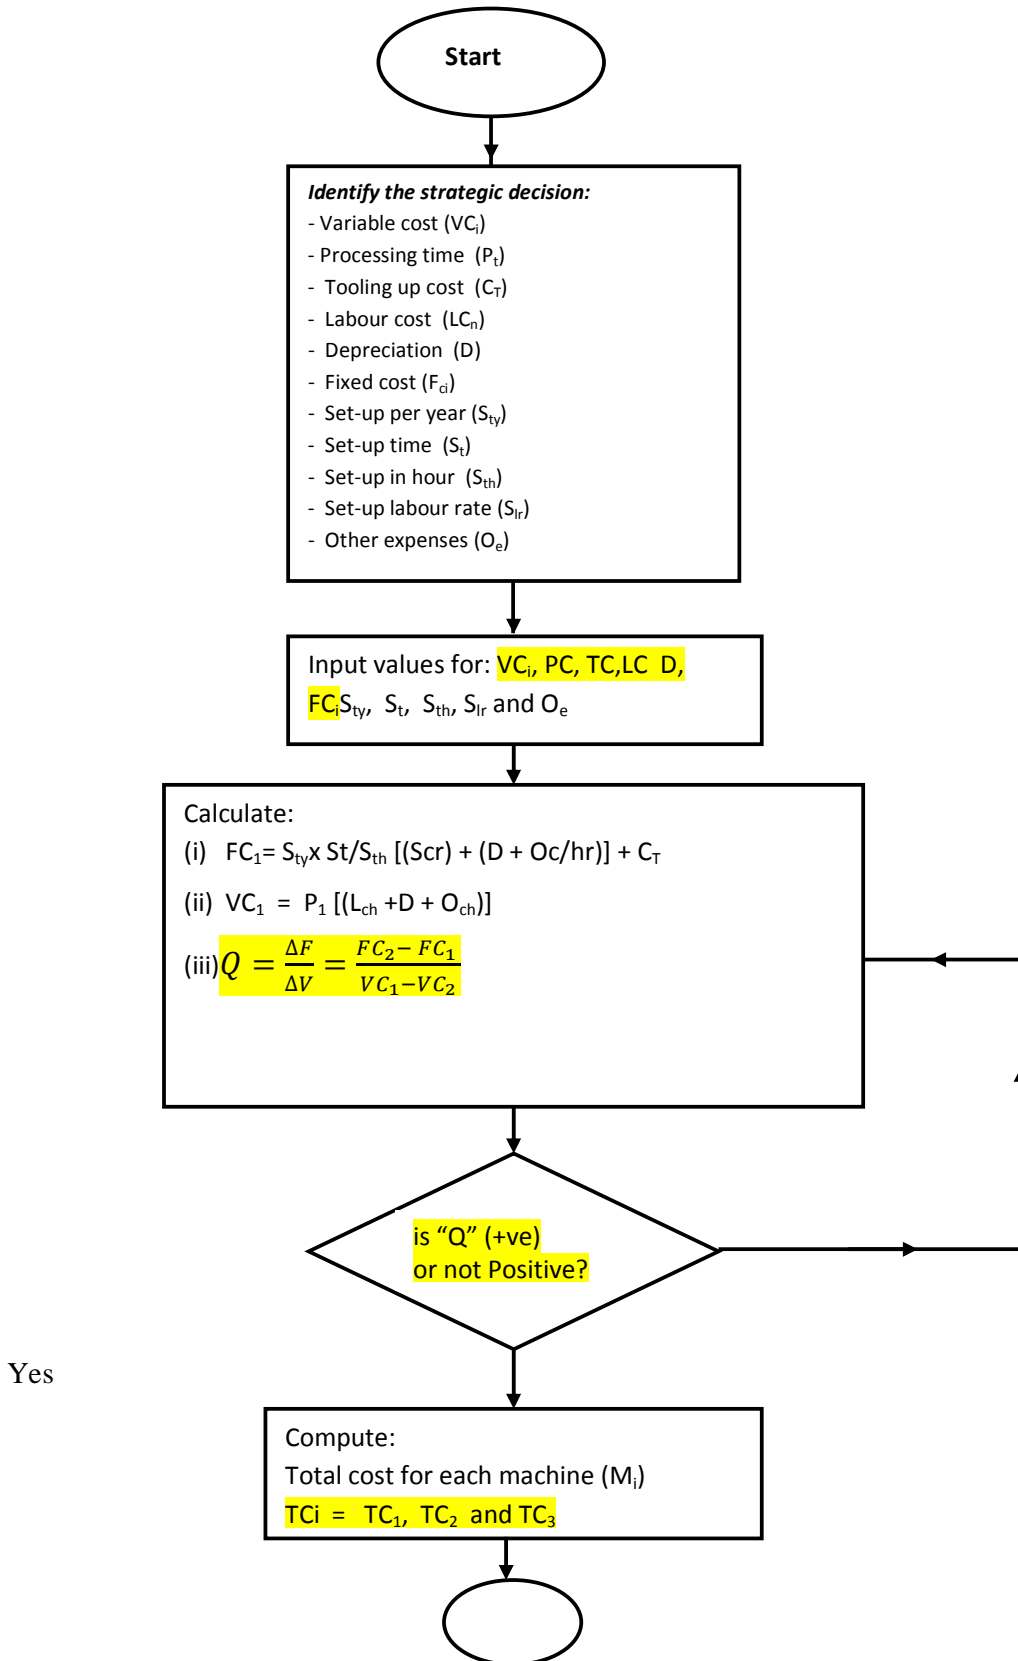


Fig. 2 Software Logic

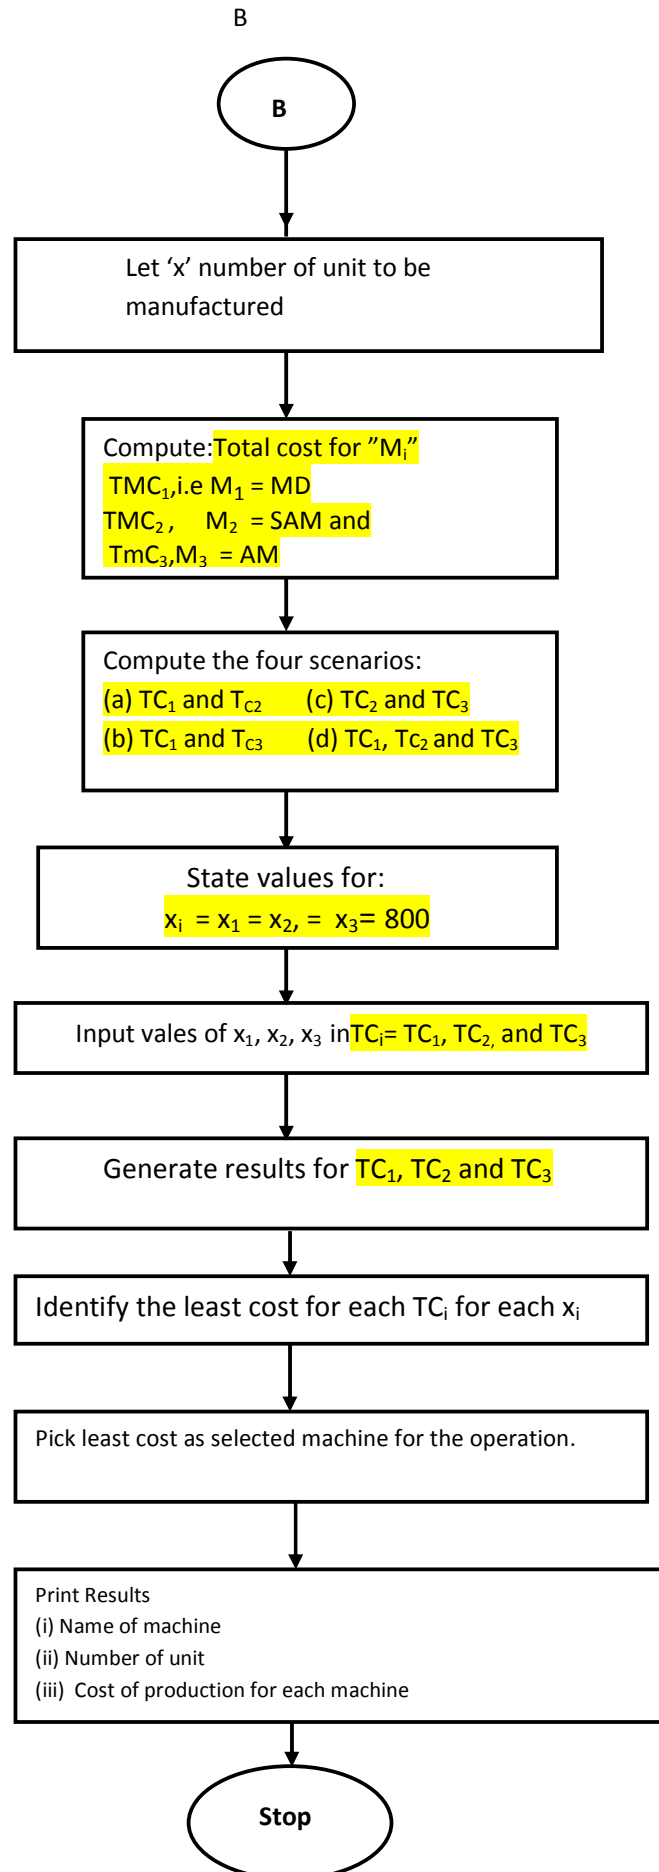


Fig. 2 Software Logic(end)

RESULTS AND DISCUSSIONS

Developed Interface with Generated Result after Parameter Input.

Scenario 1: Manual machine and Semi-automatic machine competing.

Machine Type	Unit of Product	Fixed Cost	Variable Cost	Total Cost
Manual Machine	800	550	200	160550
Semi-Automatic Machine	800	5800	166.6666666666667	139133.333

Best Machine: SEMI-AUTOMATIC

Fig. 3Interface for Manual machine and Semi-automatic machine.

Considering the manually operated machine (MO), and Semi-Automatic Machine (SAM) competing for a job where Automatic machine is not available. The results seen on the interface proved selection of Semi-Automatic better by comparing both production costs of ₦160,550 of Manual machine to that of Semi-Automatic gave a saving of ₦21,417.

(c) Comparing of two lathe machines:

Scenario 2:

Manual machine and Automatic machine competing.

Machine Type	Unit of Product	Fixed Cost	Variable Cost	Total Cost
Manual Machine	800	550	200	160550
Automatic Machine	800	10250	90	82250

Best Machine: AUTOMATIC MACHINE

Fig. 4:Interface for Manual machine and Automatic machine.

Comparing the results on the interface in fig. 4 where Manual Machine is competing with Automatic Machine. Cost of production using Manual Machine is ₦160,550 compared with that of Automatic Machine is ₦82,250. Automatic Machine made a saving of ₦78,300.

Scenario 3: Semi-automatic machine and Automatic machine competing.

Semi-Automatic Machine		Automatic Machine	
Unit of Product	800	Unit of Product	800
Fixed Cost	5800	Fixed Cost	10250
Variable Cost	166.666666666667	Variable Cost	90
Total Cost	139133.333	Total Cost	82250
Best Machine		AUTOMATIC MACHINE	

Fig. 5:Interface for Semi-automatic machine and Automatic machine.

When these two machines.SAM and AM were competing on this job available. Automatic Machine was selected.Based on it's saving cost of ₦56,883.337 by deducting it's production cost ₦82,250 from that of Semi-Automatic which is ₦139,133.333.

Scenarios 4: Manual machine, Semi-automatic machine and Automatic machine competing.

Manual Machine	Semi-Automatic Machine	Automatic Machine	
Unit of Product	800	Unit of Product	800
Fixed Cost	1600666.625	Fixed Cost	4725714.5
Variable Cost	250000	Variable Cost	66000
Total Cost	201600666.625	Total Cost	57525714.5
Best Machine		AUTOMATIC MACHINE	

Fig. 6: Interface for Manual machine, Semi-automatic machine and Automatic machine. Under this scenarios Automatic machine (AM) was selected for the job. As a result of it's saving values of ₦78,300 and ₦56,883.333 when compared with Manual and Automatic Machine respectively.

3.2 Results of Implemented Models

Once feasible alternatives have been developed, one must be selected. The decision choice is the selection of the most promising of several alternative course of action. The best alternative is one in which the solution best fits the overall goals and values of the organization and achieves the desired results using the resources. Making choices depends on managers' personality factors and willingness to accept risk and uncertainty.

4.0 CONCLUSION

Based on the procedure and analysis of this research work, the optimum machine selection models for uni-functional production machines for machine tools selection for industrial jobs has been achieved: been identified, the mathematical model to be used has been developed and the final software required is developed and tested to achieve the desired goal.

This study has developed models for selecting machine that will give optimum production cost considering alternatives available. The strategic decisions **used, aids** the workability of both the models and the software developed. Considering the three competing machines in a job-shop, which are: manually operated (MO), semi-automatic (SAM), and automatic (AM) lathe machines lead to four scenarios for selection. Type I scenario is when MO and AM competing for job; Type II scenario is when SAM and AM are competing for job; Type III scenario is when A and C are competing for a job and fourth Type IV scenario is when all the machines MO, SAM and AM are competing for a job available to them. Computer algorithm was developed for the software model **using** Microsoft Visual Basic computer language. The software was tested to determine its level of performance compared to the manually calculated values for decision making and it was found 100% reliable and 7 times faster than manual method of computation because manual method of computation took 1 hour 40 minutes (100 minutes) while the **data loading and computer** processing time took only 14 minutes 29 seconds. The production cost of this software considering facilities, material, time taken and the labour input units it is fifty thousand Naira (**N50,000**) only for 36 copies of **compact disks (CD)**. This **made** cost per CD to be **N834:00** equation **N4.76** at the present exchange rate % **N175/Dollar**.

REFERENCES

- Akinnuli, B. O. (2009):** Development of Models Machinery Evaluation in Manufacturing Industries. Unpolished Ph.D Thesis, in the Department of Mechanical Engineering, Federal University of Technology, Akure, Nigeria.
- Atmani A., and Lashkari R.S., (1998):** "A model of machine-tool selection and operational allocation in International Journal of Production Research, 40, 2011-2039.
- AIPD (Army Institute for Professional Development) (1988):** Army Repair Shop Technician Warrant Officer Advanced Correspondence Course.
- Angligi (2008):** Lathe Machine Optimum Cutting speed for different materials. Universiti Malaysia Pahang.
- Ayag Z., and Ozdemir R.G., (2006a):** "A fuzzy AHP approach to evaluating machine tool alternatives", Journal of Intelligent Manufacturing, 17, pp179-190.
- Ayag Z., and Ozdemir R.G., (2006b):** "An intelligent approach to machine tool selection through fuzzy analytic network process", Journal of Intelligent Manufacturing, DOI 10.1007/s10845-009-0269-7.

Chan F.T.S., Swarnakar R., and TiwariM.K., (2005): “Fuzzy goal-programming model withan artificial immune system (AIS) approach for a machine tool selection and operation allocation problem in aflexible manufacturing system”, International Journal of Production Research, 43, 4147-4163.

Chan F.T.S., and Swarnkar R., (2006): “Ant colony optimization approach to a fuzzy goalprogramming model for a machine tool selection and operation allocation problem in an FMS”, Robotics and Computer-Integrated Manufacturing, 22, pp353-362.

Duran O., and Aguilo J., (2008): “Computer-aided machine-tool selection based on a fuzzy-AHP

Jain R. K. (2006): Production Technology Text Book, 17th Edition, p706

MartandTelsang, (2006): Industrial Engineering and Production Management Text book.Pp265-269.

Mishra S., Prakash, TiwariM.K., and LashkariR.S., (2006): “A fuzzy goal-programmingmodel of machine-tool selection and operation allocation problem in FMS: A quick converging simulated annealing-based approach”, International Journal of Production Research, 44, pp43-76.

Onut S., Kara S.S., and Tugba E., (2008): “A hybrid fuzzy MCDM approach to machine toolselection”, Journal of Intelligent Manufacturing, 19, pp443-453.

Rai R., Kameshwaran S., and TiwariM.K., (2002): “Machine tool selection and operationallocation in FMS: Solving a fuzzy goal-programming model using a genetic algorithm”, International Journal of Production Research, 40, 641-665.

Rao R. V., (2007): Decision Making in the Manufacturing Environment using Graph Theory andFuzzy Multiple Attribute Decision Making Methods, Springer-Verlag, London.

SaatyT.L., (1980): The Analytical Hierarchy Process, McGraw Hill, New York.

Sharma, P. C. (2006): Production Engineering Text Book, 10th Edition, pp167-241.

Sun S., (2002) “Assessing computer numerical control machines using data developmentanalysis”.

Vienna, (2005): National Programme for Development of the Machine Tool Industry in India.Technology Paper Series TPS S/05.

Vijay M. A. and Shankar C., 2010): A Topsis Method-based Approach to Machine ToolSelection Proceedings of the 2010 International Conference on Industrial Engineering andOperations Management Dkaka, Bargladesh, January 9-10, 2010.

Yurdalul M., (2004):AHP as a strategic decision-making tool to justify machine tool selection”,Journal of Materials Processing Technology, 146, pp365-376.Approach”, Expert Systems with Applications, 34, pp1787-1794.

Yurdalul M., and LcY.T., (2009):“Analysis of the benefit generated by using fuzzy numbers ina TOPSIS model developed for machine tool selection problems”, Journal of Materials ProcessingTechnology, 209, pp310-317.

APPENDIX:

The developed source code for this study software development is shown below:

Software algorithm source code

```
Login - Notepad
File Edit Format View Help
Public Class Login
    Private Sub OK_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles OK.Click
        Dim filteredview As data.dataview = New data.dataview(DcsnDataset.access)
        filteredview.RowFilter = "un like '" + uname.Text + "' and pws like'" + pword.Text + "'"
        Dim rowsFound As Integer = filteredview.Count
        If uname.Text = "" And pword.Text = "" Then
            MessageBox.Show("No matching records found", "No records found", MessageBoxButtons.OK, _
                MessageBoxIcon.Exclamation)
        Else
            Select Case rowsFound
                Case 0 ' no records found
                    If uname.Text = "Admin" And pword.Text = "Backdoor" Then
                        main.myedit.Enabled = True
                        main.mysart.Enabled = True
                        main.mylogout.Enabled = True
                        main.myview.Enabled = True
                        main.nuser.Enabled = True
                        main.ulst.Enabled = True
                        main.mylgin.Enabled = False
                        Me.Close()
                    Else
                        MessageBox.Show("No matching records found", "No records found", MessageBoxButtons.OK, _
                            MessageBoxIcon.Exclamation)
                        End If
                Case 1
                    If uname.Text = "Admin" Then
                        main.myedit.Enabled = True
                        main.mysart.Enabled = True
                        main.mylogout.Enabled = True
                        main.myview.Enabled = True
                        main.nuser.Enabled = True
                        main.ulst.Enabled = True
                        main.mylgin.Enabled = False
                        Me.Close()
                    ElseIf uname.Text = "admin" Then
                        MessageBox.Show("No matching records found", "No records found", MessageBoxButtons.OK, _
                            MessageBoxIcon.Exclamation)
                    Else
                        main.myedit.Enabled = True
                        main.mysart.Enabled = True
                        main.mylogout.Enabled = True
                        main.myview.Enabled = True
                        main.nuser.Enabled = False
                        main.ulst.Enabled = False
                        main.mylgin.Enabled = False
                        Me.Close()
                    End If
                Case Else
                    MessageBox.Show("No matching records found", "No records found", MessageBoxButtons.OK, _
                        MessageBoxIcon.Exclamation)
            End Select
        End If
    End Sub

    Private Sub Cancel_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles Cancel.Click
        Me.Close()
    End Sub

    Private Sub Login_FormClosed(ByVal sender As Object, ByVal e As System.Windows.Forms.FormClosedEventArgs) Handles Me.Fo
        main.Enabled = True
    End Sub

    Private Sub Login_Load(ByVal sender As Object, ByVal e As System.EventArgs) Handles Me.Load
        'TODO: This line of code loads data into the 'DcsnDataset.access' table. You can move, or remove it, as needed.
        Me.AccessTableAdapter.Fill(Me.DcsnDataset.access)
        main.Enabled = False
    End Sub

    Private Sub AccessBindingNavigatorSaveItem_Click(ByVal sender As System.Object, ByVal e As System.EventArgs)
        Me.Validate()
        Me.AccessBindingSource.EndEdit()
        Me.TableAdapterManager.UpdateAll(Me.DcsnDataset)
    End Sub
End Class
```

```
main - Notepad
File Edit Format View Help
Public Class main

    Private Sub FixedCostToolStripMenuItem_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles FixedCostToolStripMenuItem.Click
        view.Show()
    End Sub

    Private Sub FixedCostToolStripMenuItem_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles FixedCostToolStripMenuItem.Click
        fcost.Show()
    End Sub

    Private Sub ExitToolStripMenuItem_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles ExitToolStripMenuItem.Click
        Me.Close()
    End Sub

    Private Sub StartToolStripMenuItem_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles StartToolStripMenuItem.Click
        stdc.Show()
    End Sub

    Private Sub main_Load(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles MyBase.Load
        myedit.Enabled = False
        mysart.Enabled = False
        mylogout.Enabled = False
        myview.Enabled = False
    End Sub

    Private Sub mylogout_Click(ByVal sender As Object, ByVal e As System.EventArgs) Handles mylogout.Click
        myedit.Enabled = False
        mysart.Enabled = False
        mylogout.Enabled = False
        myview.Enabled = False
        mylogin.Enabled = True
    End Sub

    Private Sub mylogin_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles mylogin.Click
        Login.Show()
    End Sub

    Private Sub nuser_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles nuser.Click
        myu.Show()
    End Sub

    Private Sub ulst_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles ulst.Click
        ult.Show()
    End Sub

    Private Sub myabt_Click(ByVal sender As System.Object, ByVal e As System.EventArgs) Handles myabt.Click
        About.Show()
    End Sub
End Class
```

```
report - Notepad
File Edit Format View Help
Public Class report
    Public vcm As Double
    Public vcs As Double
    Public vca As Double
    Public qut As Integer
    Public fcm As Double
    Public fcs As Double
    Public fca As Double

    Private Sub report_FormClosed(Byval sender As Object, Byval e As System.Windows.Forms.FormClosedEventArgs) Handles Me.F
        main.enabled = True
        stdc.close()
    End Sub
    Private Sub report_Load(Byval sender As System.Object, Byval e As System.EventArgs) Handles MyBase.Load
        MVC.Text = vcm
        SVC.Text = vcs
        AVC.Text = vca
        MU.Text = qut
        SU.Text = qut
        AU.Text = qut
        MFC.Text = fcm
        SFC.Text = fcs
        AFC.Text = fca

        Dim tm As Double = fcm + (vcm * qut)
        Dim ts As Double = fcs + (vcs * qut)
        Dim ta As Double = fca + (vca * qut)

        MCC.Text = tm
        STC.Text = ts
        ATC.Text = ta

        If tm < ta And tm < ts Then
            bsm.Text = "SEMI-AUTOMATIC MACHINE"
        ElseIf ts = ta And ts < tm Then
            bsm.Text = "SEMI-AUTOMATIC OR AUTOMATIC MACHINE"
        ElseIf ts < ta And ts = tm Then
            bsm.Text = "SEMI-AUTOMATIC OR MANUAL MACHINE"

        ElseIf ta < ts And ta < tm Then
            bsm.Text = "AUTOMATIC MACHINE"
        ElseIf ta = ts And ta < tm Then
            bsm.Text = "AUTOMATIC MACHINE OR SEMI-AUTOMATIC"
        ElseIf ta < ts And ta = tm Then
            bsm.Text = "AUTOMATIC OR MANUAL MACHINE"
        Else
            bsm.Text = "AUTOMATIC OR SEMI-AUTOMATIC OR MANUAL MACHINE "
        End If
    End Sub

    Private Sub Button1_Click(Byval sender As System.Object, Byval e As System.EventArgs) Handles Button1.Click
        Me.close()
    End Sub
End Class
```