

Original Research Article

Delineating Aquifer Systems Using Dar Zarouk Parameters Determined From Surface Geoelectric Survey: Case Study of Okigwe District, Southeastern Nigeria.

Leonard I. Nwosu*, Anthony S. Ekiné and Cyril N. Nwankwo
Department of Physics, University of Port Harcourt, Nigeria.

ABSTRACT

This study is aimed at delineating the aquifer systems in the study area and hence determine the parts with higher aquifer yield. To achieve this, 120 Vertical Electrical Soundings (VES) were carried out in Okigwe District of Imo State of Nigeria, using the Schlumberger electrode array and a maximum electrode spread of 900m. Twelve of the VES stations were sited near existing boreholes to enhance interpretation. The resistivity of the aquifers zones varied across the study area. The highest thickness of 104.4m for the aquifer is recorded at Amonze (VES 95). Using an average transmissivity of 1032.0848 m²/day determined from pumping test data of the boreholes in the area, a mean conductance value of 91.222 m/day was obtained for the area. The hydraulic conductivity values obtained from the VES results varied from 9.8854 to 115.9646 m/day. The transmissivity values range from 992.04 to 10388m²/day. The storativity or storage coefficient determined for the area ranged from 1.59x10⁻⁴ to 7.80x10⁻³ while the specific capacity is fairly uniform with magnitude of about 877 m³/day. Using Dar Zarrouk parameters determined for the area, three aquifer systems have been identified viz: the Coastal plain sands aquifer, the Bende-Ameki sandstone/shale aquifer and the Ajali sandstone aquifer. The coastal plain sands aquifer serves the Southern part of Isiala Mbano, Ehime Mbano, Ihitte Uboma and the entire Obowo Local Government Areas (LGAs). The Bende-Ameki sandstone aquifer serves part of Ihitte Uboma, the Northern part of Ehime Mbano and Isiala Mbano. The Ajali sandstone aquifer serves the Northwestern part of the study area in Okigwe. Groundwater potential evaluation of the district based on the survey and borehole hydrogeological information revealed that the Southern part of the district is the most prolific in terms of groundwater exploitation and thus the most promising for siting productive boreholes.

Key Words: Hydraulic conductivity, Aquifer Systems, Aquiferous Zones, Dar Zarouk, VES.


1. INTRODUCTION

Okigwe District is in Imo State of Nigeria. The area lies between Latitude 5°30'N to 5°57'N of the equator and Longitude 7°04'E to 7°26'E of the Greenwich Meridian (Fig. 1) covering a land area of about 1824 km². The District is made up of six LGAs namely, Isiala Mbano, Ihitte Uboma, Ehime Mbano, Onuimo, Obowo and Okigwe. Scarcity of potable water in both rural and urban areas of Okigwe district especially during the dry seasons has become a concern to Government and the citizens of the area. Government intervention by siting the Okigwe regional water scheme in Onuimo LGA did not yield the desired results of supplying portable water from the Imo River largely due to pollution and lack of funds for extensive project execution.

Many failed boreholes have been experienced in most parts of the District in the recent past. This borehole failures may have resulted from the nature of the geological setting of the area especially around the northern part and inadequate or lack of geophysical information. Hence proper geophysical investigation of the area is required as the area is fast experiencing increase in commercial and industrial activities owing to rapid urbanization. The study therefore, attempts to map the aquifer systems in a geologically complicated environment with high failure rate. This will help in generating information that will aid borehole developers in the successful drilling of water boreholes.

Electrical resistivity of rocks is a variable property that depends on a number of factors including the resistivity of the pore electrolyte and is inversely related to the porosity and degree of saturation of the formation (Ekin, 2010). The resistivity of rock layers vary considerably from Formation to Formation as well as within a particular layer (Ekin, 2010). This variation can be very large for any particular layer. Table 1 gives approximate ranges for the electric resistivity of rocks and soils, which was used in the interpretation of VES data in this work.

Table 1: Approximate ranges for the electric resistivity of rocks and soils (Vingoe, 1972).

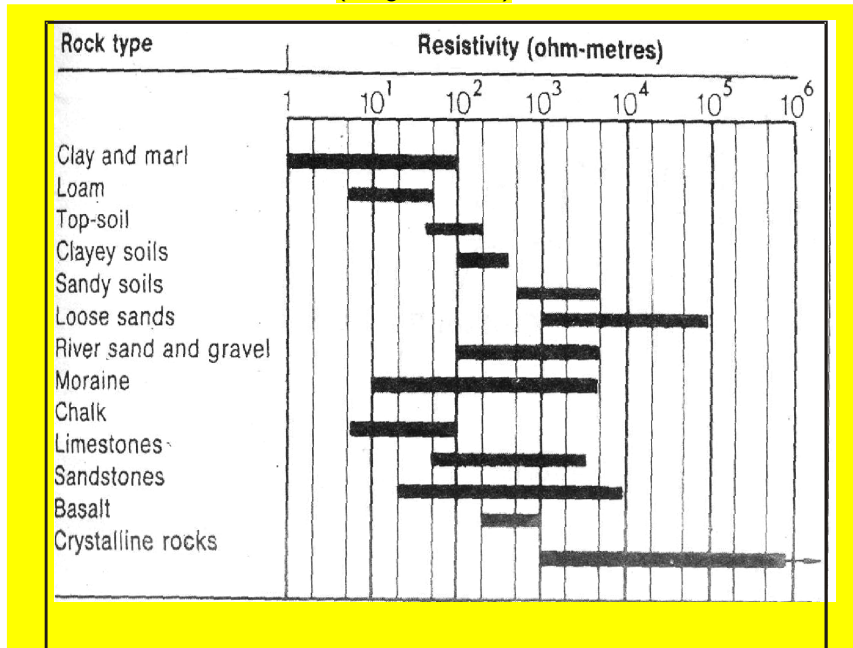

Dar Zarouk parameters derived from layer resistivity and thickness during Vertical Electrical Sounding (VES) survey has been proved to be very useful in understanding the distribution of aquifer hydraulic parameters (Zhody, et al., 1965). Niwas and Singhal (1981) derived analytically the relationship between aquifer transmissivity and transverse resistance, and that between transmissivity and longitudinal conductance. The result of their study showed that in areas where the geologic setting and water quality do not vary greatly, the conductivity product $K\sigma$, remains fairly constant. Thus if the value of hydraulic conductivity K is known from the existing boreholes and the electrical conductivity σ , from the sounding interpretation around the boreholes are available, it is possible to estimate the transmissivity and its variation from place to place by determining the transverse resistance or longitudinal conductance for the aquifer. This is the basis of this geophysical survey.

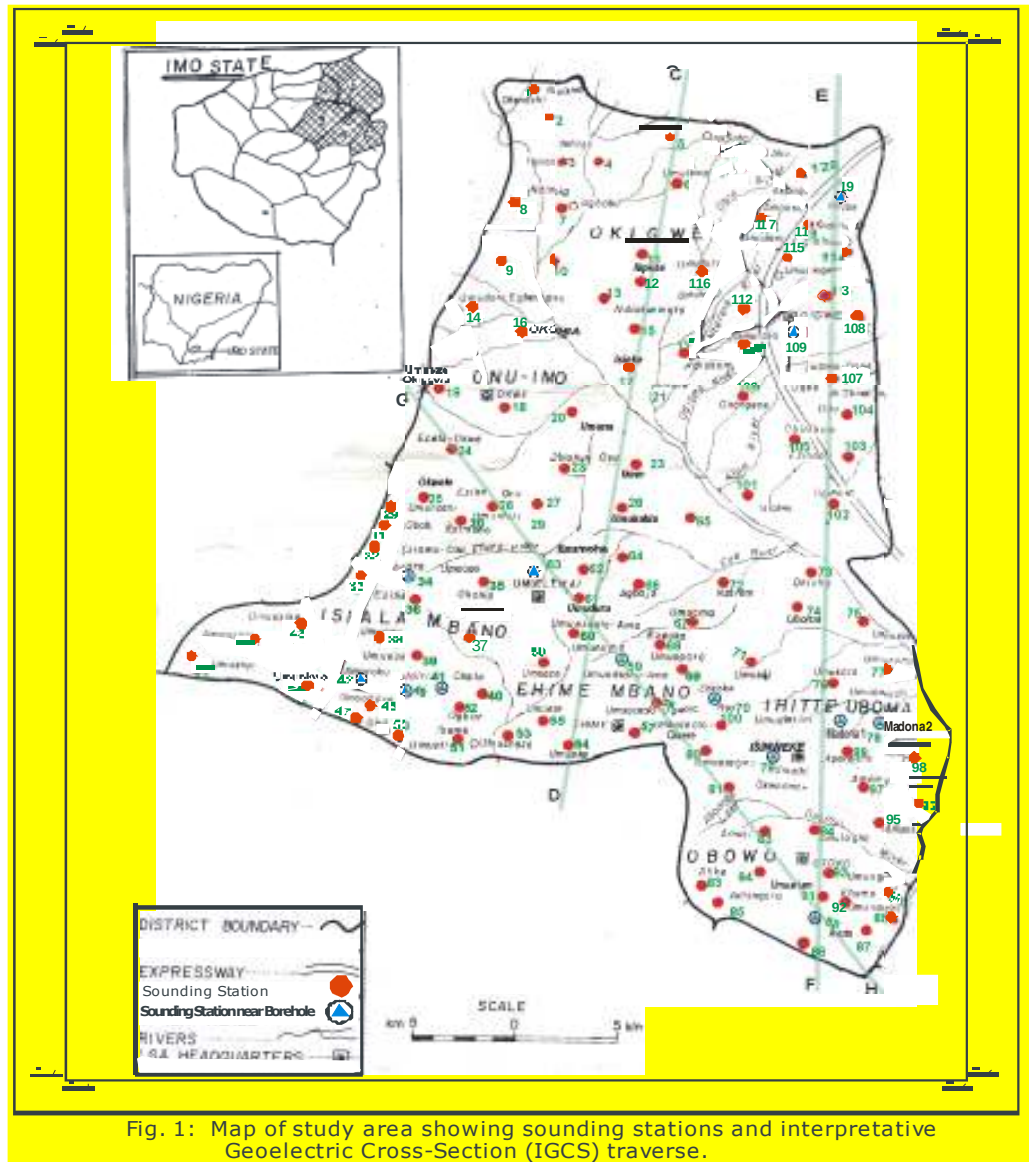


Fig. 1: Map of study area showing sounding stations and interpretative Geoelectric Cross-Section (IGCS) traverse.

1.1 Literature Review

A review of the geology of the district (Fig. 2) reveals the following stratigraphic units; the Benin Formation, the Ogwashi - Asaba Formation, the Bende - Ameki Formation, Imo Shale Formation, Nsukka Formation and Ajali Formation (Akaolisa and **Selemo**, 2009).

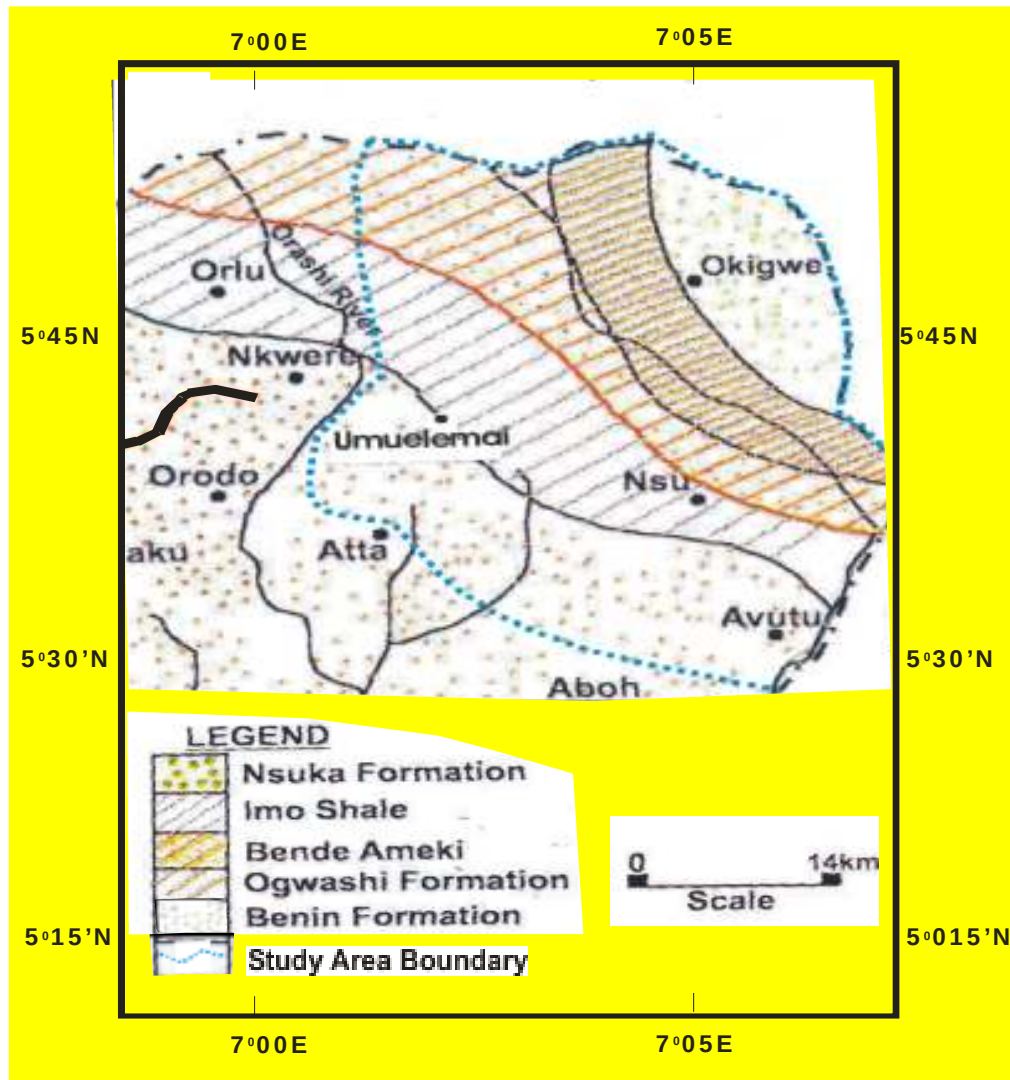


Fig. 2: Geological map of Imo State showing the study Area (Adapted from Akaolisa and Selemo, 2009).

The Benin Formation is overlain by lateritic overburden and underlain by the Ogwashi - Asaba Formation, which is in turn underlain by the Ameki Formation of Eocene to Oligocene age (Mbonu et al., 1990). The formation consists of coarse - grained gravelly sandstones with minor intercalations of shales and clay. The sand units are mostly coarse to fine grained, pebbly and poorly sorted (Onyeagocha, 1980; Short and Stauble, 1967). The southern part of the study area covering Obowo, Southern part of Ehime Mbano and Isiala Mbano fall within this Formation. The Ogwashi - Asaba Formation is made up of variable succession of clays, sands and grits with seams of lignite. It also forms part of the study area. The Bende-Ameki Formation consists of greenish - grey clayey sandstones, shales and mudstones with interbedded limestones. This Formation in turn overlies the impervious Imo Shale Group.

The Ajali formation consists of thick friable, poorly sorted sandstones typically white in colour but sometimes iron- stained. A marked banding of coarse and fine layer is displayed (Kogbe, 1989). The formation is often overlain by a considerable thickness of red earth, which consists of red, earthy sands formed by the weathering and ferruginisation of the formation (Kogbe, 1989).

Using the Logan's approximation of Theim's equation (Logan, 1964), aquifer parameters from pumping test data can be determined for steady state aquifer flow as follows:

$$Q = \frac{2\pi S_{mw}Kh}{2.3 \log \frac{r_{max}}{r_w}} \quad 1$$

Where Q = well discharge in m³ / day
 K = average hydraulic conductivity in m / day
 h = thickness of the aquifer in (m)
 S_{mw} = maximum drawdown in the pumped well in (m).
 r_w = radius of the pumped well in (m).
 r_{max} = radius of influence of the pumping in (m).

The area circumscribed by r_{max} is the area in the borehole environment that contributes water to the well. Equation (1) was modified by Logan (1964) for steady state flow in confined aquifer as

$$Kh = \frac{2.3Q \log \frac{r_{max}}{r_w}}{2\pi S_{mw}} \quad 2$$

And since the logarithm of the ratio of r_{max} to r_w is very small, assuming average condition of radii, r_{max} = 500 m, r_w = 0.3048 m, then

$$\log \frac{r_{max}}{r_w} = 3.21$$

The equation further reduces to

$$Kh = \frac{1.18Q}{S_{mw}} \quad 3$$

$$\therefore K = \frac{1.18Q}{hS_{mw}} \quad 4$$

Table 3 shows the pumping test data obtained for some boreholes in the study area. Computation of the aquifer parameters using equations 1 to 4 gave the values displayed in Table 2 for parameters 1 to 6.

Dar Zarouk Parameters equations are derived by considering a column of unit square cross-sectional area cut out of group of layers of infinite extent. The total transverse unit resistance R, and total longitudinal unit conductance S, are respectively given as:

$$R = \sum_{i=1}^n \rho_i h_i \quad i = 1, 2, 3, \dots, n \quad 5$$

The total longitudinal unit conductance,

$$S = \sum_{i=1}^n \frac{h_i}{\rho_i} \quad i = 1, 2, 3, \dots, n. \quad 6$$

where ρ_i and h_i are the resistivity and thickness of the *i*th layer. The average longitudinal resistivity,

205 $\rho_t = \frac{H}{S}$ 7

206 where

207 $H = \sum_{i=1}^n h_i \quad i = 1, 2, 3, \dots, n$ 8

208 and the average transverse resistivity

209 $\rho_t = \frac{R}{H}$ 9

210 Transmissivity, T_{ri} , used in groundwater hydrology (Mbonu *et al.*, 1990), is given by

212 $T_{ri} = K_i h_i$ 10

213 where K_i is the hydraulic conductivity of the i th layer of thickness h_i . The parameters R and S are
 214 called the Dar Zarouk parameters.

215 The relationship between aquifer transmissivity, T_r and transverse resistance, R and that between
 216 T_r and S have been derived analytically by Niwas and Singhal (1981) as

217 $T_r = K \sigma R$ 11

218 Thus, it is possible to estimate the transmissivity and its variation from place to place from the
 219 determinations of R or S for the aquifer.

220
 221 Parameters 7 to 15 of Table 3 were determined using the above equation. Notice the close
 222 agreement between parameters 2 and 15 for Madonna II Ihitte Uboma.

225 2. MATERIAL AND METHODS

226 A total of 120 Vertical Electrical Soundings (VES) were carried out in the study area using the
 227 Schlumberger electrode configuration with a maximum electrode spacing of 900 m. The ABEM
 228 Terrameter (SAS) 300B was used to acquire the data. It has a liquid crystal digital read-out and
 229 an automatic signal averaging microprocessor. Four stainless non-polarizable electrodes were
 230 used, two current electrodes and two potential electrodes. A 12V dc source was used to supply
 231 current.

232
 233 The current electrode spacing was increased symmetrically about the centre, keeping the
 234 potential electrode constant until it became necessary to increase the potential electrode spacing
 235 as the strength of the recorded signal diminished. The apparent resistivity values computed were
 236 plotted against half of the current electrode spacing ($L/2$) on a log-log graph (Fig. 3(i)). The
 237 sounding curves obtained were subjected to conventional partial curve matching using the Rijk
 238 Waterstaat (1975) master curves to obtain the initial model parameters (resistivities and
 239 thickness) for computer aided interpretation. The field measurements were inverted using the
 240 Schlumberger automatic analysis version 0.92 software package (Hemkler, 1985) to determine

the true resistivity and depths of subsurface formations. The resulting model curves have three to five interpretable geoelectric layers with less than 5% RMS errors.

3. RESULTS AND DISCUSSION

The survey revealed that the study area is multi-layered exhibiting variation in resistivity with depth. The geoelectric section compared favourably with the borehole lithology and the resistivity model gave the resistivity of the probable aquifer, the depth to aquifer and the aquifer thickness. Figures 3, 4 and 5 show typical modelled curve, the geoelectric section and boreholes lithology of VES 79 near Isinweke borehole in Ihitte Uboma LGA; VES 32 near Anara borehole and VES 110 near Okigwe borehole respectively. The curves are combinations of H- type and K-type (Ekin, 2010) and HKH-type and KQH-type (Oseji 2005).

Interpretative Geoelectric Cross-Sections (IGCS) constructed for the area along profiles CD, EF and GH (Fig. 1) reveal that there are variations in resistivity and thickness of the aquiferous zones across the entire study area. The top layers generally show large variations in layer resistivity. These layers correspond to the brown to reddish lateritic overburden interspersed with sandy soils, sandy clay with humus. The aquiferous layer consists of fine to medium coarse sands, sandstone and sandy shale. The aquifer is thicker in the southern part of the study area. The aquiferous layer is underlain by conductive layer composed of clay-sand/lignite and shale. The geoelectric sections CD, EF and GH (Figures 6, 7 and 8) indicate that the main aquifers are confined in some parts of the traverses. The Northeastern part and the South-South area indicate prospective area for siting boreholes with high yield expectations. Similar observation is recorded by profile GH in the Southern and South-South zone with high aquifer thickness (Maduagwu, 1990; Njoku, 1991).

Table 3 compares aquifer characteristics determined from pumping test data with those calculated on the basis of VES data. Parameters 1 to 6 were determined from pumping test data while parameters 7 to 15 were computed from VES results. The computation was based on the screened sections of the aquifer in the borehole. The hydraulic properties of the aquiferous zone determined for the VES stations 61 to 80 are displayed in Table 4. The table shows variation in transmissivity and storativity values as well as other hydraulic properties of the aquiferous zones.


The hydraulic conductivity values obtained from the VES results varied from 9.8854 to 115.9646 m/day. The storativity values determined for the area varied from 1.59×10^{-4} to 7.80×10^{-3} while the specific capacity is fairly uniform with a maximum value 877 m^3/day . The transmissivity value of $992.04 \text{m}^2/\text{day}$ was recorded in the Northern part of the study area. The value increased towards the southern part with corresponding higher values of aquifer thickness and storage coefficient.



3.1 Evaluation of Aquifer Systems in the Study Area

On the basis of the diagnostic electrical and hydraulic conductivity product ($K\sigma$) values, three aquifer systems have been identified (Fig. 9).

(i). The coastal plain sand aquifer (Zone A) is relatively thick and unconfined with high thickness and transmissivity values as well as storage coefficient. The aquifer materials are fine to medium coarse, unconsolidated sand and sandstone with seams of sandy clay (Ekwe et al., 2006). This zone covers the southern part of Isiala Mbano, Ehime Mbano, Ihitte Uboma and the entire Obowo LGA. The $K\sigma$ values range from 0.0093 to 0.00921. This close range suggests little variation in the water quality of the aquifers. The relatively lower resistivity value recorded at Okwuoma (VES 81) could be linked to Abadaba lake and that recorded at VES 95 to the presence of Onuinyi River. The aquifer is relatively deep in the zone. However, the lower resistivity values VES 91 has over VES 81 could be linked to the nature of the depositional environment. The depth to aquifer is about 53m in Obowo, 88m to 90m in Ihitte Uboma, 52m to 70m in Isiala Mbano and 40m to 45m in Ehime Mbano.


(ii). The Bende- Ameki Sandstone/Shale aquifer (Zone B) which covers the least area in the district located around parts of Ihitte Uboma and the Northern part of Ehime Mbano and Isiala Mbano LGAs. The formation is aquiferous but not to the extent of the coastal plain sands with transmissivity being lower due to higher percentage of shales. Groundwater exploitation is sometimes difficult in this zone (IWADA 2002). The $K\sigma$ values range from 0.00831 to 0.23787. This range suggests variation in the water quality of the aquifers. The depth to aquifer is about 40m to 45m.

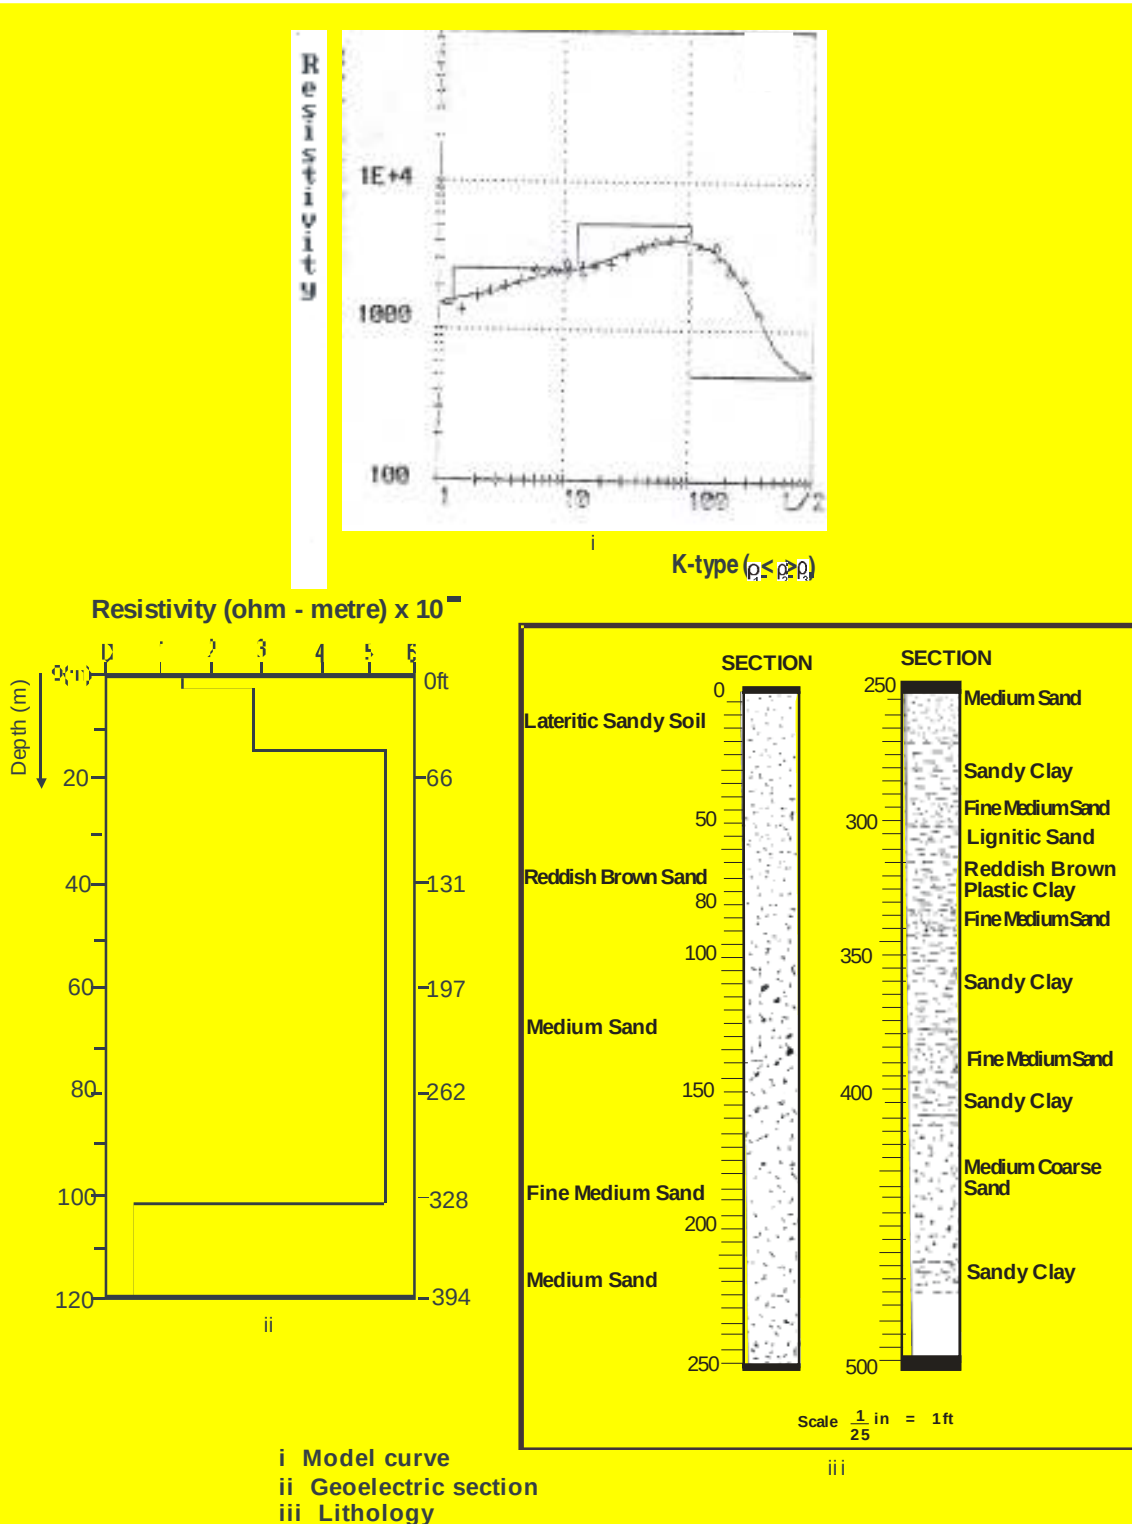

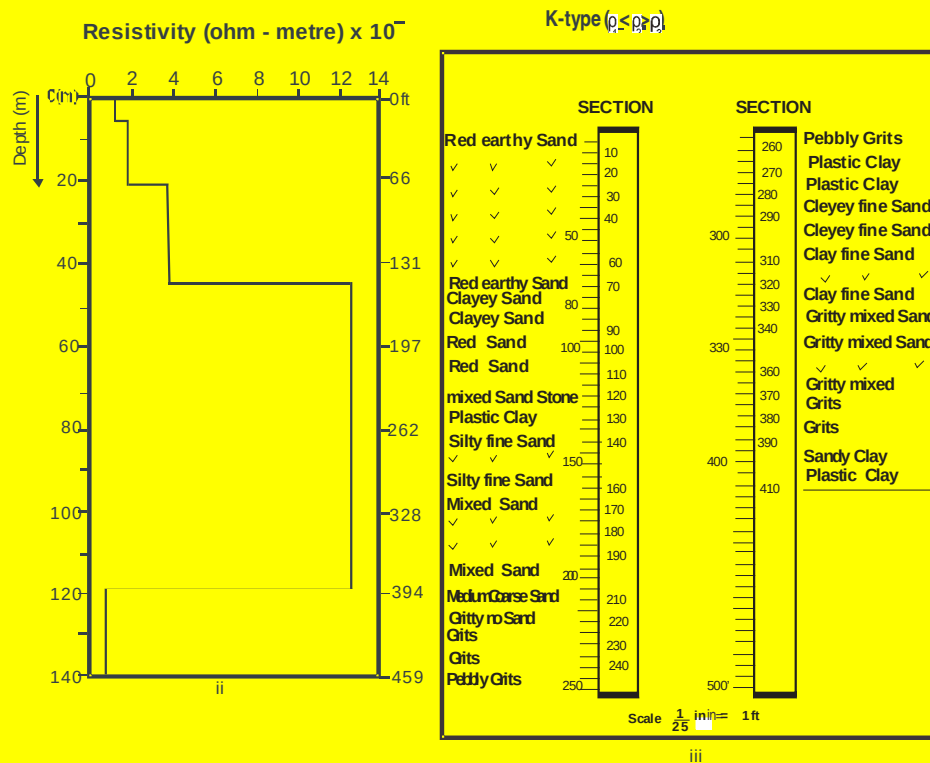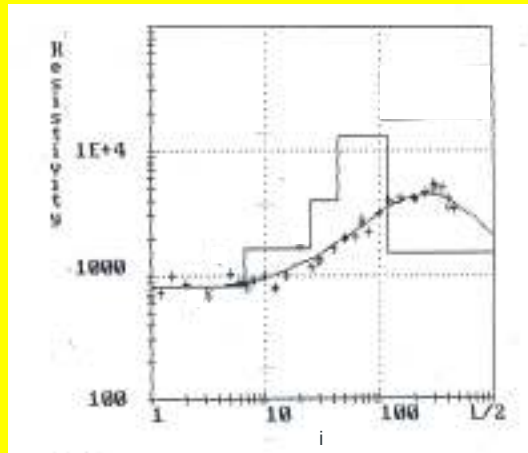


i Model curve
 ii Geoelectric section
 iii Lithology


Fig. 4: Model curve, geoelectric section and lithology of VES 32 near Anara Borehole.

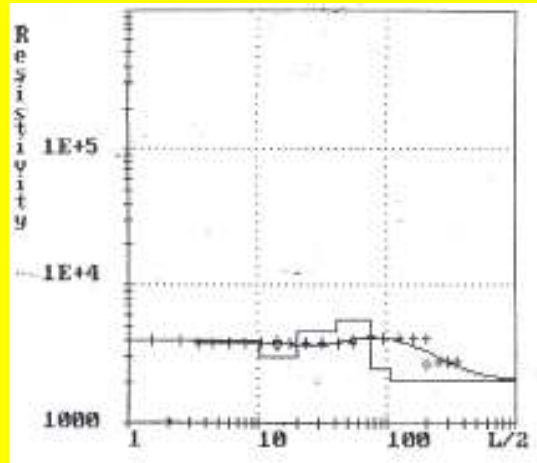

i K-type ($\rho_s < \rho_p < \rho_b$)

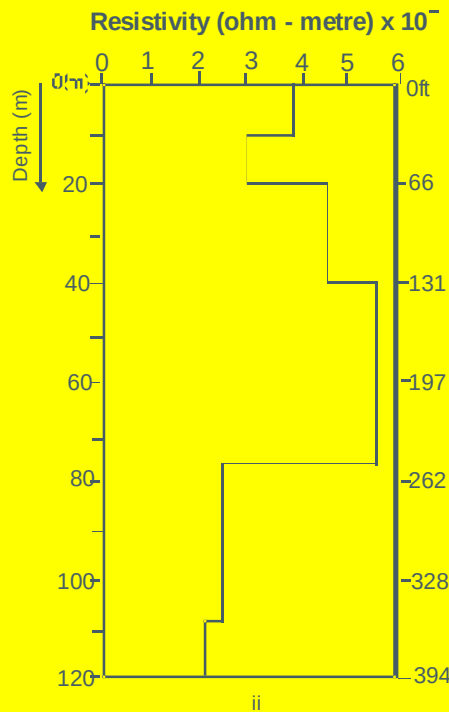

ii

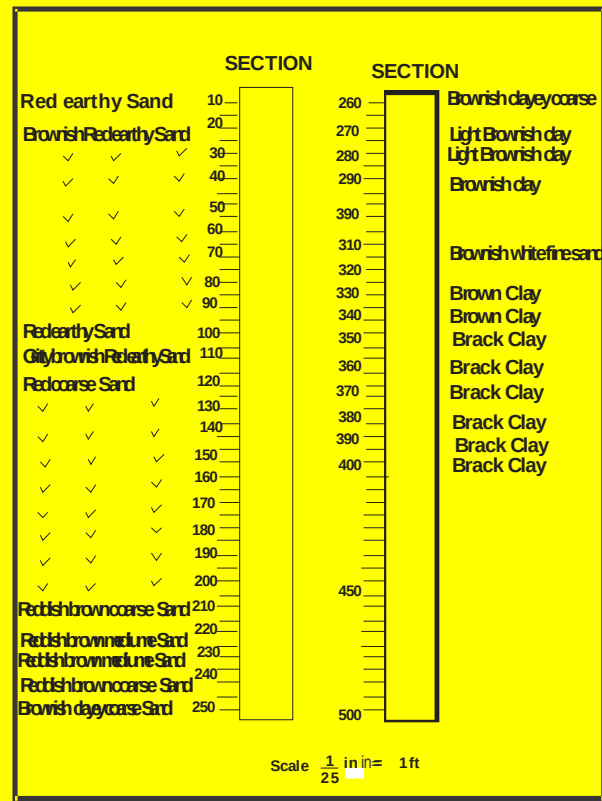

Scale $\frac{1}{25}$ in = 1 ft

iii

- i Modelled curve
- ii Geoelectric section
- iii Lithology

Fig. 5: Modelled curve, geoelectric section and lithology of VES 110 near Okigwe Borehole.

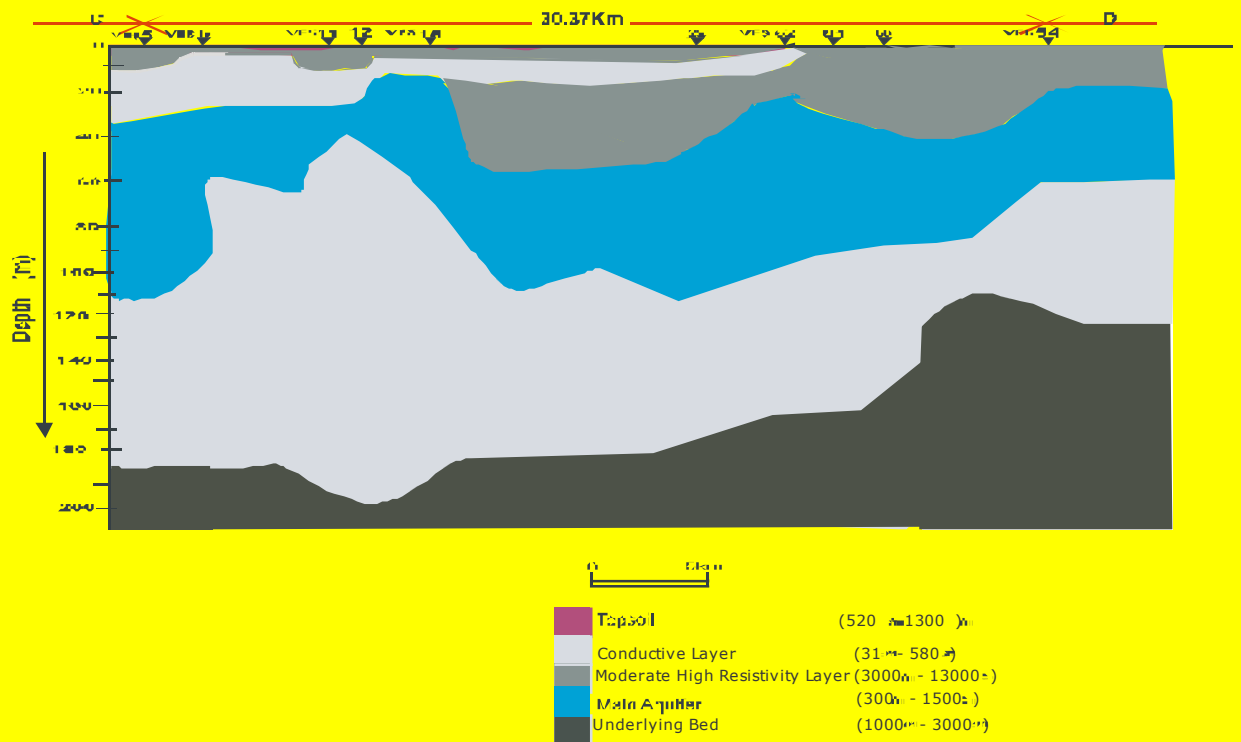


Fig. 6: Interpretative Geoelectric Cross-Section (IGCS) along profile line CD

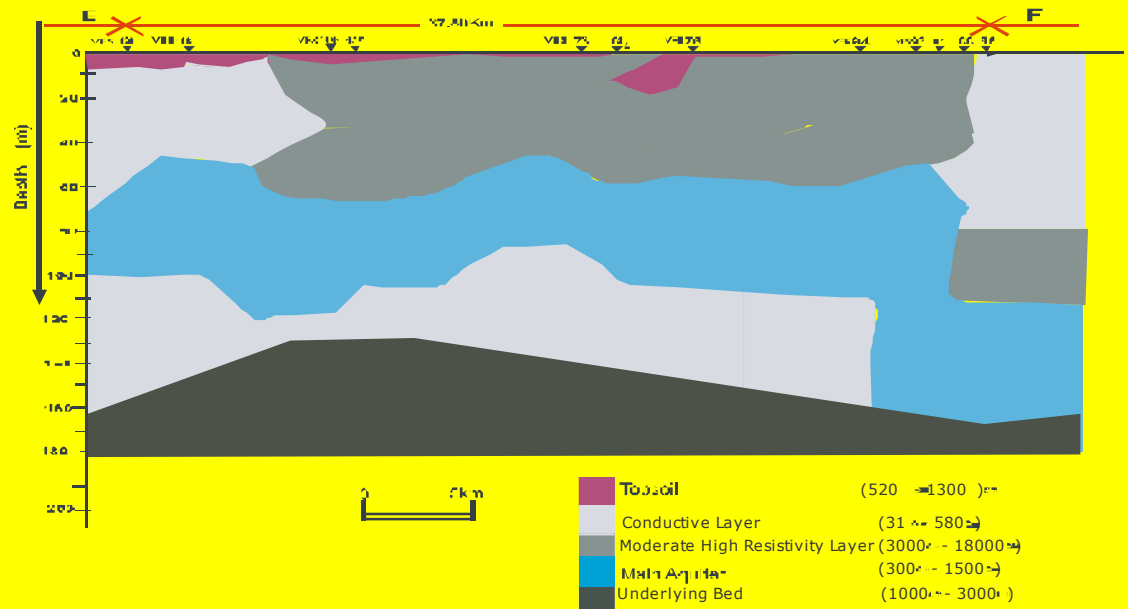


Fig. 7: Interpretative Geoelectric Cross-Section (IGCS) along profile line EF

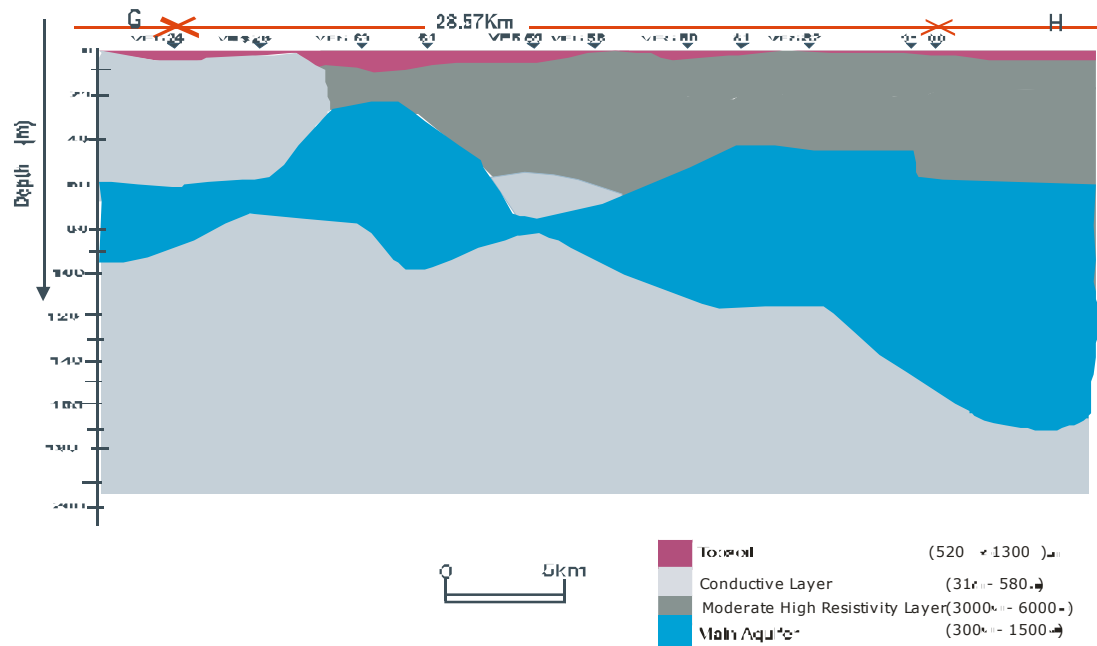


Fig.8: Interpretative IGEOelectric Cross-Section (IGCS) along profile line GH

(iii). The Ajali Sandstone/Shale aquifer (Zone D) covers the Northwestern part of the study area in Okigwe LGA. This area falls within the Ajali Formation which consists of thick friable, poorly sorted sandstones. The clay and shale members of this Formation are thick which makes ground water exploitation difficult (IWADA, 2002). Water is available through cracks and fissures.

Each zone is fairly homogenous in terms of geologic setting, hydraulic properties and possibly water quality. This is because Niwas and Singhal (1981) showed that in areas of similar geologic setting and water quality, the product, $K\sigma$, remain fairly constant. This assumption has also been adopted by Ekine and Iheonunekwu (2007) and Nwosu et al. (2011) in identifying the aquifer systems in Mbaitoli and Isiala Mbano LGAs of Imo State respectively.

On the bases of longitudinal conductance and possible groundwater divides, four zones are identified using the corresponding locations of $K\sigma$ product values (Fig. 10). The areas covered by Zone D are underlain by relatively high resistive (low longitudinal conductance aquifer materials). These areas may not be good prospects for drilling boreholes with high yield expectation (Mbonu et al., 1990). The dividing lines between Zone A and C runs almost parallel to the channels of Nterere and Odioma Rivers that join to drain southwards into the Imo River. Similarly, the dividing line between Zone A and B runs along the channels of Efuru River and Eze River which are tributaries of Imo River that terminate at Abadaba lake. These lines indicate possible groundwater divide.

4. CONCLUSION

On the basis of the diagnostic conductivity product ($K\sigma$) and longitudinal conductance values distribution, three main aquifer systems has been identified for the study area. The resistivity of the aquifer zones varies across the area with an average value of about 3133 Ωm . The highest thickness of 104.4m of aquifer was recorded in the southern part of area. This work has successfully delineated the aquifer systems in Okigwe district. Based on the VES results, the Southern and Northeastern parts of the district are more promising for siting borehole with high

529 yield expectations than the North Western part as there is no well defined sand body that
530 constitute aquifer there. The occurrence of aquifer in this area is linked to the presence of fracture
531 in the shale members.
532

533 **COMPETING INTERESTS**

534 The Authors declare that there is no competing interest for this study.

TABLE 2: EXISTING BOREHOLE /PUMPING TEST DATA - CONVERTED VALUES (SOURCE: IMO STATE WATER BOARD, OWERRI, IMO STATE)									
S/No	LOCATION	DRILL DEPTH (m)	CASING DIAMETER (m)	SCREEN DIAMETER (m)	CASING DEPTH (m)	SCREEN LENGTH (m)	SWL (m)	DRAW DOWN (m)	YIELD (m ³ /day)
1	Avutu No.2 BH	170.7	0.34	0.20	146.3	21.3	53.0	10.7	4384.25
2	Anara 1	73.2	0.30	0.20	54.9	15.2	52.4	Abortive	218.21
3	Umununo 1	73.2	0.30	0.20	54.9	15.2	23.8	28.7	618.99
4	Umununo 2	79.3	0.30	0.20	67.1	9.2	21.6	27.1	392.76
5	Amaraku 1 Amaraku 2	99.4 118.9	0.20 0.30	0.15 0.25	76.2 83.5	1.5 6.1	31.1 74.4	- 1.8	1091.06
6	Madona 1 Ihiite Uboma	128.0	0.34	0.25	97.5	30.5	95.1	6.3	654.64
7	Madona 2 Ihiite Uboma	182.9	0.34	0.25	151.8	22.0	93.3	6.4	2618.55
8	Nsu	143.3	0.20	0.15	125.6	17.7	35.3	Collapsed	761.96
9	Ugiri	121.9	0.25	0.20	103.6	15.2	71.3	6.1	1745.70
10	Mbano	91.4	0.13	0.12	73.8	6.1	46.0	20.1	78.56
11	Mbano Hospital	85.6	0.25	0.15	78.9	9.8	44.8	3.7	1854.80
12	Umuelenmai	140.2	0.30	0.20	121.9	15.2	30.9	3.8	5237.10
13	Isiweke LGA H/Q	155.5	0.30	0.20	121.9	12.2	87.6	2.0	8292.07
14	Okigwe	94.5	0.17	0.13	85.3	5.4	23.2	-	327.32

TABLE 3: AQUIFER CHARACTERISTICS CALCULATED FOR SOME BOREHOLES LOCATED IN THE STUDY AREA

S/No	PARAMETER	AVUTU BH	ANARA BH	UMUNUMO 2 BH	AMARAKU 2 BH	MADONNA 2 IHITTE UBOMA BH	NSU BH	UGIRI BH	MBANO HOSP. UMUELEMAI BH	ISIWEKE BH	OKIGWE BH
1	Screen Length (m)	21.34	15.24	15.24	6.10	21.95	17.68	15.24	9.75	12.19	5.39
2	Average field hydraulic conductivity K (m/day)	22.5957	-	1.6729	115.3321	21.9952	-	22.158	61.333	393.463	-
3	Transmissivity (m ² /day)	482.1922	-	25.4950	703.5285	482.7946	-	136.272	597.997	4796.314	-
4	Storativity	0.000257	-	0.000210	0.000375	0.000226	-	0.000073	0.000319	0.02588	-
5	Specific Storage	0.000012	-	0.000014	0.000061	0.000010	-	0.000005	0.000033	0.000210	-
6	Specific capacity (m ³ /day)	409.8634	-	21.6707	577.997	410.3754	-	287.035	508.297	4076.867	-
7	Resistivity of Aquifer(Ω m)	5810	13400	12600	15000	16200	2430	6080	14800	4368	13950
8	Aquifer thickness h (m)	24.80	18.20	16.00	35.50	38.20	23.6	24.50	71.70	18.40	16.40
9	Conductivity σ ($\Omega^{-1}m^{-1}$)	0.000172	0.000746	0.000079	0.000067	0.000062	0.00412	0.000164	0.000068	0.000229	0.000072
10	Longitudinal Conductance S	0.0043	0.0014	0.0013	0.0024	0.0024	0.0097	0.0040	0.0048	0.0042	0.0012
11	Transverse Resistance	1440.88	1243880	201600	532500	618840	57348	148960	1061160	80371.20	228780
12	K σ value	0.007158	0.042304	0.005096	0.001948	0.001675	0.018018	0.006909	0.000979	0.012845	0.004531
13	K/ σ	241955.23	76106.01	816522.78	433,907.46	435,772.58	106,146.60	619,498.53	211,683.82	244,611.35	874,055.56
14	Transmissivity of aquiferous zone T _r (m ² /day)	1031.382	10317.141	1027.337	1037.245	1036.625	1033.282	1029.112	1038.691	1032.366	1036.626
15	Hydraulic conductivity	41.6163	56.7080	64.5053	29.0728	27.0179	43.7324	42.1259	14.3945	56.0916	62.9320

TABLE 4: SUMMARY OF AQUIFER CHARACTERISTICS FOR ALL THE SOUNDING STATIONS

VES Station	Resistivity of Aquifer (Ωm)	Thickness (m)	Conductivity σ ($\text{S}\cdot\text{m}^{-1}$) $\times 10^3$	Transverse Resistance R (Ωm)	Longitudinal Conductance S (m^{-1})	Hydraulic conductivity K (m/day)	Transmissivity T (m ² /day)	Conductivity Product Kn	Storativity $\times 10^{-1}$	Specific Capacity (m ³ /day)
61	1480	50.3	67.6	74444.00	0.034	20.5186	1032.58	0.014	2.48	877.27
62	1430	72.0	69.9	102960.00	0.050	14.3345	1031.64	0.010	3.55	877.27
63	14800	71.7	6.8	1357160.00	0.005	14.3945	1328.48	0.001	3.08	877.27
64	4860	54.1	20.6	311526.00	0.013	16.1012	1033.28	0.003	3.16	877.27
65	12500	34.2	8.0	427500.00	0.003	30.1779	1032.08	0.002	1.69	877.27
66	1360	25.0	73.5	34000.00	0.018	41.2834	1031.67	0.030	1.23	877.27
67	1362	42.4	73.4	57748.80	0.031	24.3416	1031.78	0.018	2.09	877.27
68	2185	34.2	47.8	71727.00	0.016	30.1779	1077.91	0.014	1.69	877.27
69	1266	47.8	78.9	60610.40	0.038	21.5913	1032.55	0.017	2.36	877.25
70	2430	23.6	41.2	64638.00	0.010	43.7324	1164.63	0.018	1.16	877.27
71	2800	62.0	35.7	173600.00	0.022	16.6465	1031.67	0.006	3.06	877.27
72	1400	50.0	71.4	70000.00	0.036	20.6417	1031.67	0.015	2.47	877.27
73	2382	35.9	42.0	85513.80	0.015	28.7489	1032.54	0.012	1.77	877.27
74	1450	62.0	69.0	899000.00	0.043	16.6465	1032.60	0.012	3.06	877.27
75	2125	58.5	47.1	124312.50	0.028	17.6425	1032.89	0.008	2.68	877.27
76	1486	54.0	67.3	80244.00	0.036	19.1127	1032.17	0.013	2.66	877.27
77	1170	68.3	68.0	100401.00	0.046	45.1111	1031.67	0.010	3.37	877.27
78	2500	8.6	10.5	8700.00	0.001	120.0099	1029.51	0.012	4.24	877.27
79	5110	90.1	19.6	460411.20	0.018	11.4549	1033.37	0.002	4.44	877.27
80	24100	55.0	42.0	1325500.00	0.002	18.7652	1044.68	0.001	2.71	877.27

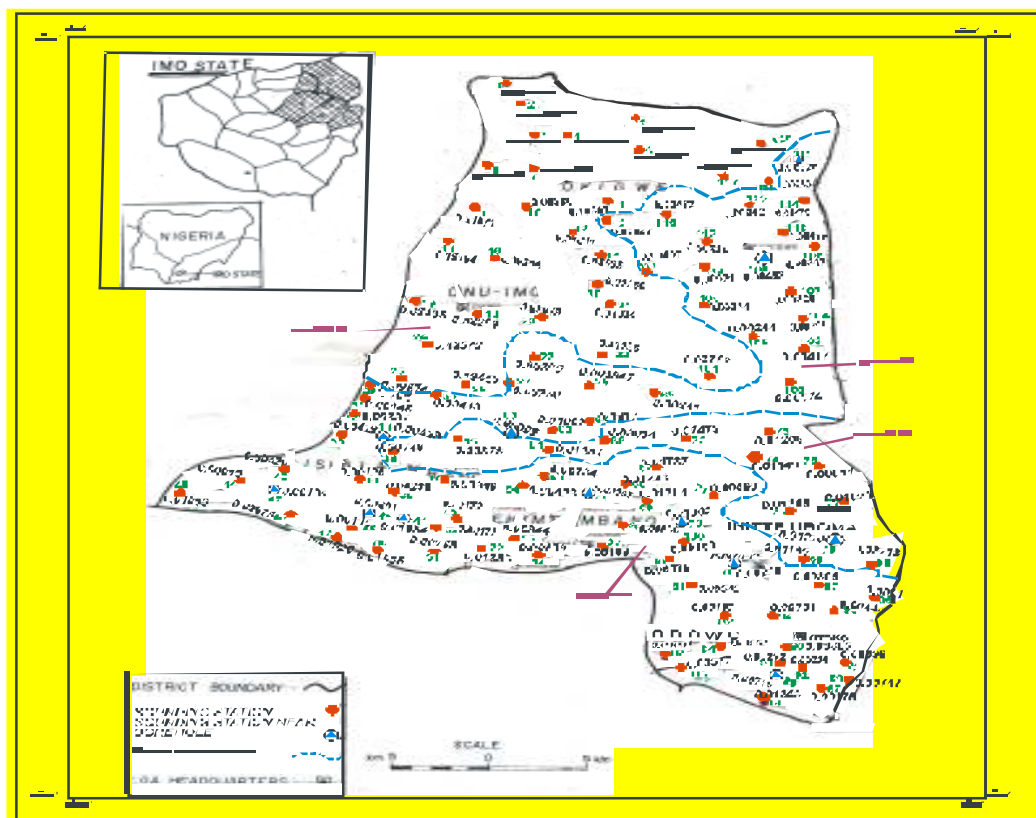


Fig.9 : Distribution of Electrical Conductivity and Hydraulic Conductivity Product (K) of the Aquiferous Zone

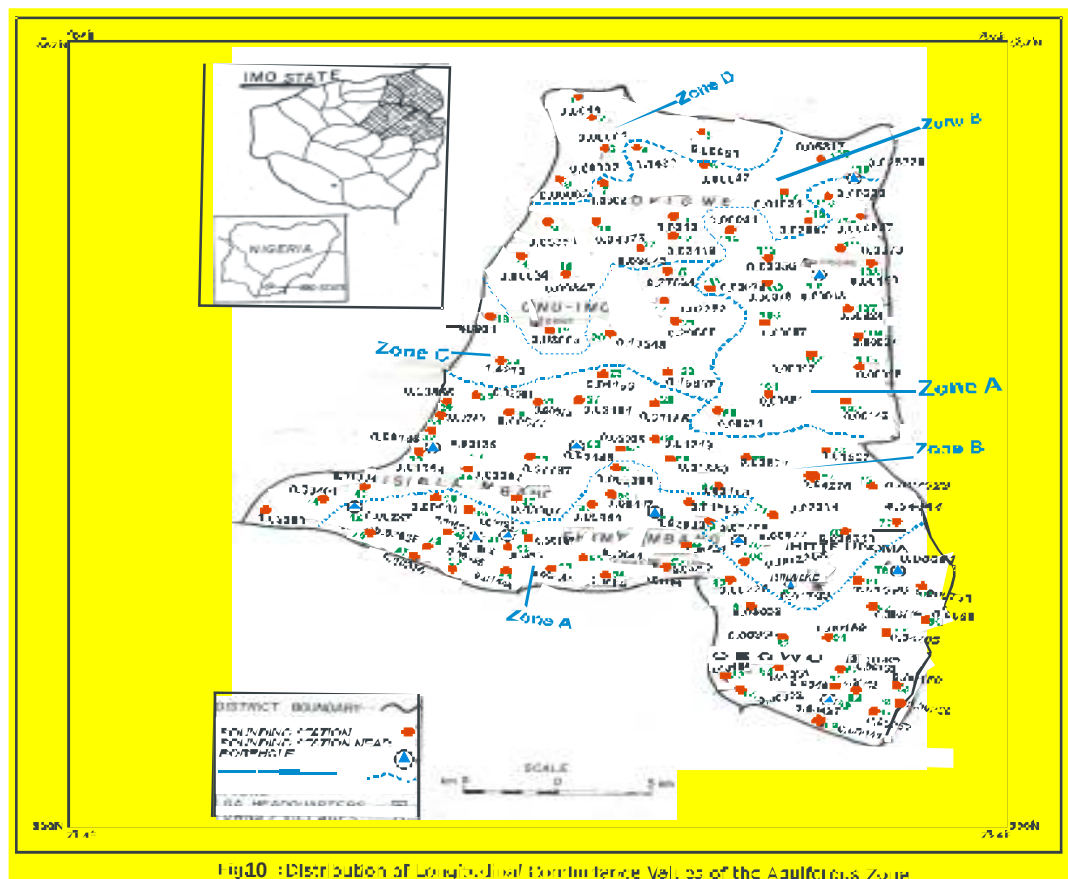


Fig.10 : Distribution of Longitudinal Disinfectant Values of the Aquiferous Zone

REFERENCES

- Akaolisa CCZ, Selema AOI. A study of the sand and Gravel deposit around the permanent site of the Federal University of technology, Owerri using the vertical electrical sounding (VES) techniques. *Nigeria Journal of Physics*. 2009; 21,81- 88.
- Ekine AS, Iheonunekwu EN. Geoelectric Survey for Groundwater in Mbaitoli Local Government Area, Imo State Nigeria. *Scientia Africana*. 2007; 6(1): 39-48.
- Ekine AS. *Fundamentals of Applied Geophysics*. Peare Publishers Port Harcourt Nigeria. 2010; 35-36.
- Ekwe AC, Onu MN, Onuoha KM. Estimation of aquifer hydraulic characteristics from electrical sounding data; the case of middle Imo River Basin Aquifer South Eastern Nigeria. *Journal of Spacial Hydrology*. 2006; 6, 121-131.
- Hemkler CJ. Schlumberger Automatic analysis version 0.92, serial No. 586 for the free University, Amsterdam. Copyright (c) C.J. Hemkler Ele and Sgracht 83 Amsterdam. 1985.
- IWADA. Imo Water Development Agency Documentary on Groundwater Resources Potential of Imo State, Nigeria (Unpublished). 2002; 20-50.
- Kogbe CA. *Geology of Nigeria*. 2nd revised edition. Rock View (Nigeria) limited Jos, Nigeria. 1989; 325-333.
- Logan J. Estimating transmissivity from routine production tests of wells. *Groundwater*. 1964; 2, 35-37.
- Maduagwu GN. *Water Resources Potential (Unpublished)*. Hydrogeological documentary, Imo State Public Utilities Board Owerri. 1990; 1-12.
- Mbonu PDC, Ebeniro JO, Ofoegbu CO, Ekine AS. Geoelectric sounding for the determination of aquifer characteristics in parts of the Umuahia area of Nigeria. *Geophysics*. 1990; 56(2): 284-291.
- Njoku I. *Borehole Water Supply and Time (unpublished)*, Imo State Public Utilities Board documentary. 1991; 5-10.
- Niwas S, Singhal DI. Estimation of Aquifer transmissivity from Dar Zarouk Parameters in Porous Media. *Journal of Hydrology*. 1981; 50, 393-399.
- Nwosu LI, Nwankwo CN, Ekine AS. Correlation of Self Potential (SP) and resistivity Survey Methods for Evaluation of Groundwater Potentials; Case Study of Imo State, Nigeria. *Applied Physics Research*. 2011; 3(1): 100 – 109.
- Onyeagocha AC. *Petrography and Depositional Environment of the Benin Formation*. *Journal of Mining Geology*. 1980; 17(2): 147 – 151.
- Oseji JO, Atajepo EA, Okolie, EC. Geoelectric investigation of the aquifer characteristics and groundwater potential in Kwele Delta State Nigeria. *Journal of applied Science and Environmental management*. 2005; 9(1): 157 – 160.
- Rijks Waterstaat. *Standard Graphs for resistivity prospecting*. Swets and Zeithinger, B.V. The Netherlands. 1975.

639
640 Short KC, Stauble AJ. Outline of geology of Niger Delta. Amer, soc. Petr. Geol. Bull. 1976; 51,
641 76-79.
642
643 Vingoe P. Electrical Resistivity Survey, ABEM Geophysics and Electronics. Geophysical
644 Memorandum. 1972; 5/72, 1-15.
645
646 Zhody AAR. The auxiliary point method of electrical sounding interpretation and its relationship
647 to the Zarouk parameters. Geophysics. 1965; 30. 664 660.
648