

No Frequency Reuse: Wearable Steerable MIMO Microstrip Antenna Array for Mobile Ad Hoc Applications

Taha A. Elwi^{1,2,3*}, Sa'ad Al-Frieh¹, Mohammed Al-Bawi¹, Mohammed Noori¹

¹Department of Communication, Al-Mammon University Collage, Baghdad, IRAQ

²Department of Electronics and Communication, University of Baghdad, Baghdad, IRAQ

³Institute of Mathematical Research INSPEM, University Putra Malaysia UPM, Serdang, 43400, Selangor, Malaysia

ABSTRACT

Aim: The principle of eliminating the frequency reuse in the mobile Ad Hoc system among the sectors of the unit cell using Multi Inputs Multi Outputs (MIMO) antenna array is investigated in this paper.

Antenna design: The size of the proposed antenna array is $10 \times 10 \text{ cm}^2$ to obtain a bandwidth around 1 GHz. The single antenna element is constructed from sub-patches that are connected with feeding network through pin diodes, as switches, that are mounted on an FR-4 substrate.

Antenna performance: The antenna elements are characterized from 0.8 GHz to 2 GHz in terms of S-parameters and radiation patterns with different switching OFF/ON categories.

Methodology: A numerical investigation based on Finite Integral Techniques (FIT) of Time Domain (TD) formulations is conducted using CST MWS to evaluate the antenna performance. A Frequency Domain (FD) solver based on CST formulations is conducted for validation.

Results: It is found the antenna shows insignificant coupling around 1.2 GHz and 1.6 GHz. Furthermore, the radiation patterns of the antenna are found to be in the end fire direction with phase change of about 120° among antenna sectors. The antenna provides absolute gain of 2 dBi at 1.2 GHz and 2.9 dBi at 1.6 GHz. It is found that the proposed antenna behaves like highly directive end fire antenna at the main lobe direction around 1.6 GHz. Moreover, it is found that the antenna array exhibits insignificant coupling among each other around this frequency.

Conclusion: The performance and structure of the proposed design allows the use with wearable Ad Hoc mobile systems without the need for frequency reuse by steering the radiation patterns of the antenna sectors through switching antenna branches. Finally, an excellent agreement has been achieved between the regarded results from TD and FD solvers.

Keywords: Ad Hoc, Array, Wearable devices, FIT, TD, FD.

1. INTRODUCTION

Decreasing the correlation between conventional antennas mounted on physically miniaturized arrays is one of the most substantial demands in MIMO systems [1]. However, convent antennas face a severe coupling in their arrays at the near-field due to the diffraction from finite-ground planes and exteriors surface waves [2]. Therefore, mutual coupling reduction has become a very demand feature in the design of antenna structure.

On the other hand, antenna array based on different patch configurations were performed for high gain, beam forming, and high diversity applications [3]-[6], however, the mutual coupling resulted from mutual coupling was addressed as an important issue in most MIMO applications. This is due to the fact of the surface wave propagation among patches elements leading to sever effects on the antennas performance in their arrays [7]-[8]. Moreover, the mutual coupling depends on the separation distance between the adjacent elements and their feed orientation [9]-[11].

In the literature, to overcome the negative effects of the mutual coupling, several traditional approaches were introduced in [12]-[15] such as cavity backing and substrate removal in the miniaturized antenna arrays. In [12], a pure reactance was introduced between antennas at the resonance frequency to realize a separated network from connecting a lossless network between the input ports and the antenna ports. While in [13], transmission lines as antenna decouplers were involved to reduce the mutual coupling effects, however; such kinds of the decouplers are narrowband and restricted with the antenna bandwidth. The mutual coupling between antenna elements was mitigated in [14] through sharing a defected ground plane with resonant slits. A different strategy was presented in [15] by introducing split-ring resonator magnetic inclusions between closely-separated monopole to increase the isolation. Electromagnetic Band Gap (EBG) defects on the ground planes of the microstrip antennas were introduced as nonconventional approaches for mutual coupling reduction as in [16]-[21]. However, the most manufacturing processes that associated with such approaches are complicated [16]. Nevertheless, the EBG structures in the ground plane increases the back radiation from antenna array that limits their use in wearable devices in close to the human body [22]. In addition to that, the EBG defects on the ground plans blocking the surface waves in a particular frequency band as presented in [16]-[30]. All these attempts show narrow bandwidth over the frequency of interest such as a fork-like planar EBG in [26] at 5.4 GHz, a mushroom-EBG matrix at 5.8 GHz in [17], a dumbbell-shape structure [29] at 5.6 GHz, and a C-shaped EBG array [30] at 5.5 GHz. Another reported studies showed mutual coupling reduction at 4.18 GHz [16] and 12.2 GHz with two different EBG defects [31] and [32].

We are investigated in this paper the use of directive sectors based on three patches to act as radiation directors to decrease the mutual coupling effects between the array sectors within a miniaturized profile. The proposed array performance is investigated using CST MWS numerical formulations [33]. The organization of this paper is stated as: In Section II, the proposed antenna array features are discussed. The performance of the antenna array is presented in Section III. Lastly, in Section IV, the accomplishments of the proposed paper are concluded.

2. ANTENNA DESIGN AND METHODOLOGY

The proposed antenna array is based on three main sectors mounted on a circular substrate and fed by coplanar transmission line network with three ports as seen in Fig. 1(a). The individual sector is constructed from three patches fed with a transmission line network as presented in Fig. 1(b). Generally, the microstrip antenna array is shaped circularly; see Fig.

75 1(c), to achieve high diversity in the radiation patterns of the antenna elements. The patches
 76 and the ground planes are considered as PEC layer mounted on a lossy dielectric, $\epsilon_r=4.3$
 77 and $\tan\delta=0.025$, FR-4 substrate. The three patches are separated with 120° rotationally
 78 around the z-axis at the origin. The dimensions and locations of the patches are listed in
 79 Table 1 according to Fig. 1(b). The location of the feeding position to the patch is listed in
 80 Table 1 from the center of the array. Three sectors are used for full spatial converge, where,
 81 each sector covers 120° .
 82
 83

Table 1; Patch dimensions, locations, and feeding position in (mm).

Patch	Dimensions (Major × Minor)	Location (x, y)	Feed (X_{offset} , Y_{offset})
I	12 × 6	(22, 13)	(20, 7)
II	18 × 9	(22, -19)	(20, -6)
III	26 × 13	(40, -3)	(30, 0)

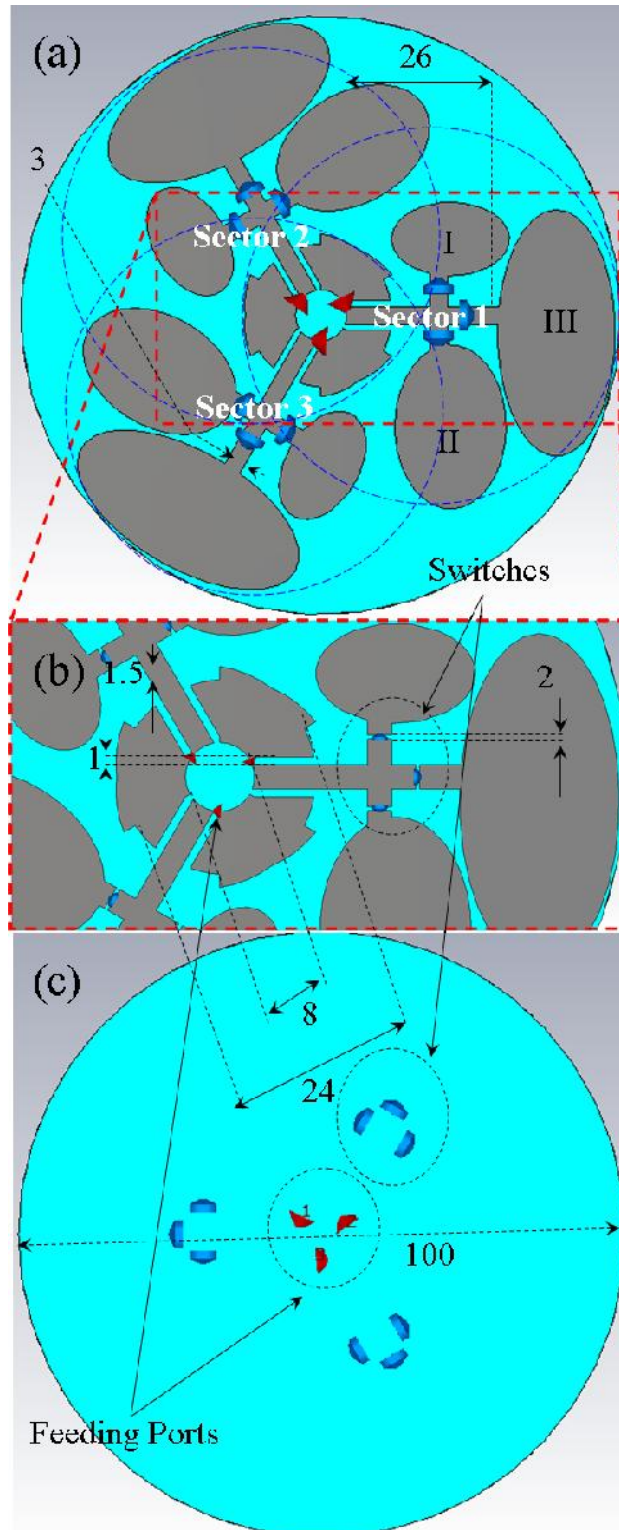


Fig. 1; Antenna dimensions and features in (mm): (a) Front panel, (b) Single antenna sector, and (c) Back panel.

3. ANTENNA PERFORMANCE AND DISCUSSION

To study the performance of the proposed antenna array, in terms of S-parameters, gain, and radiation patterns, a full wave simulation based on FIT formulations are invoked using CST MWS [7] as follow:

3.1 Antenna Performance based on Single Sector Element

A numerical study is performed on a single sector element to evaluate the S_{11} and radiation patterns in this section. It is found when all branches are ON; the sector exhibits three resonance modes as seen in the S_{11} as seen in Fig. 2. However, when the second patch is switched OFF only, two modes appear at 1.23 GHz and 1.83 GHz. By switching the first and the second patch OFF, the antenna shows a mode at 1.23 GHz, while the second mode is appeared due to the harmonic generation.

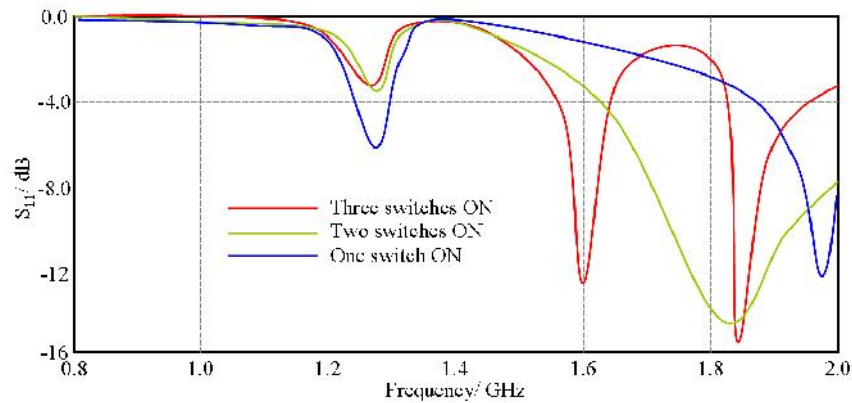


Fig. 2; The S_{11} spectra of the three patches of a single sector.

The radiation patterns of the antenna elements at the three scenarios are presented in Fig. 3 in the E - and H -planes at 1.2 GHz and 1.6 GHz. The radiation patterns of the antenna array are studied at these frequencies for MIMO applications systems [15].

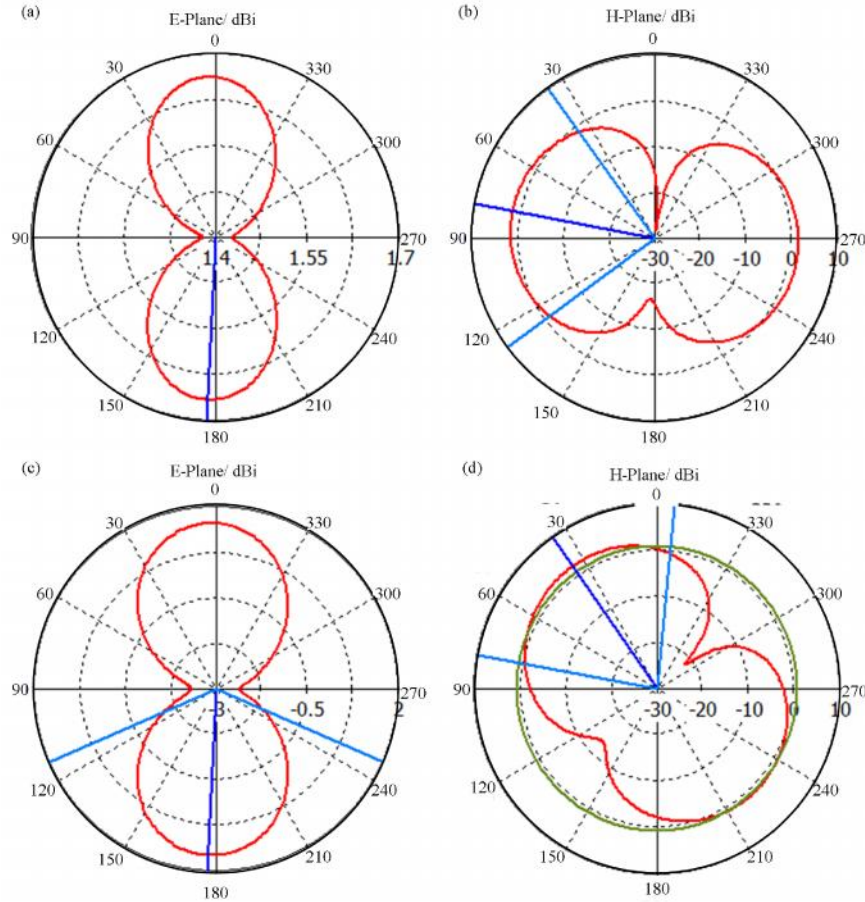


Fig. 3; Far field radiation patterns: (a) E-plane at Theta = 90° and (b) H-plane at Phi = 90° for 1.2 GHz. (c) E-plane at Theta = 90° and (d) H-plane at Phi = 90° for 1.6 GHz.

3.2 Antenna Performance based on Array Structure

In this section, the antenna array performance is investigated by switching the patches of the single sector elements sequentially in their array structure. As seen in Fig. 4, the S-parameters in terms of S_{11} , S_{12} , and S_{13} are displayed by switching the antenna branches. It is found from switching the all patches on, the antenna shows three modes at 1.18 GHz, 1.62 GHz, and 1.82 GHz as seen in Fig. 4(a). However, by switching OFF patch II, two modes appear at 1.23 GHz and 1.83 GHz. After switching only the third patch ON, the antenna shows a mode at 1.23 GHz and the second mode is appeared due to the second harmonic generation.

In Fig. 4(b), the coupling effects between the sector 1 and sector 2 is presented. When three antenna branches are switched on, the antenna array shows the minimum coupling at 1.18 GHz, while, it shows higher coupling at 1.23 GHz and 1.82 GHz. By switching on the big and small branches on, the antenna provides -10 dB at 1.23 and 1.83 GHz. Now, after switching the big branch on, the antenna presents about -9 dB at 1.23 GHz. The coupling effects between the sector 1 and sector 3 is performed in Fig. 4(c). A higher coupling is found to be when three antenna branches are on at 1.18 GHz, 1.23 GHz, and 1.82 GHz. When the big and small branches are switched on, about the same coupling effect is obtained between

sector 1 and sector 2 in Fig. 4(b). The lower coupling effect is achieved by switching only the big branch on at 1.23 GHz.

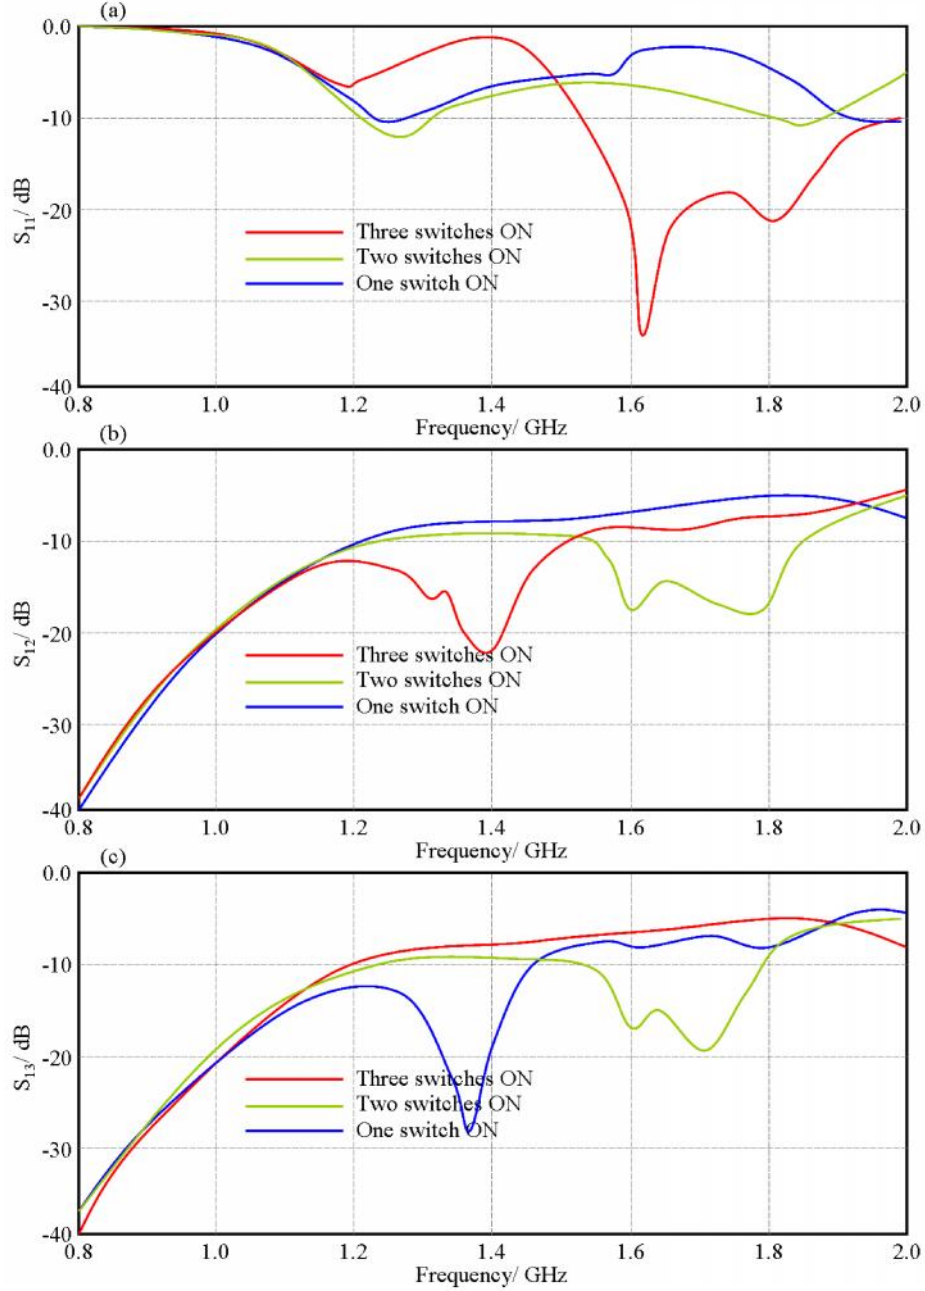


Fig. 4; S-parameters spectra: (a) S_{11} , (b) S_{12} , and (c) S_{13} .

For a MIMO system, the two adjacent antenna elements, the envelope correlation between the antenna elements is given by [6]

$$\rho_e = \frac{|S_{ii}^* S_{ij} + S_{ji}^* S_{jj}|^2}{[1 - (|S_{ii}|^2 + |S_{ji}|^2)][1 - (|S_{jj}|^2 + |S_{ij}|^2)]} \quad (1)$$

144
145
146
147
148

where i and j are for the first and the second antenna elements, respectively. The correlation envelop is evaluated between the first element with the second element and the first element with third element in terms of S_{12} and S_{13} , respectively as seen in Fig. 5.


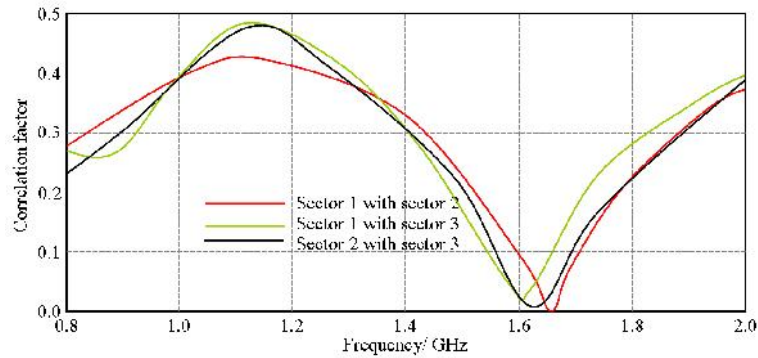


Fig. 5; Correlation profile among 1, 2, and 3 sectors.

149
150
151
152
153
154
155
156

In Figs 6, the radiation patterns in the E - (Theta=90) and H - (Phi=90) planes are displayed at 1.2 GHz and 1.6 GHz when the three switches are ON. The values of the antenna gain, beam width, main lobe direction are listed in Table 2.

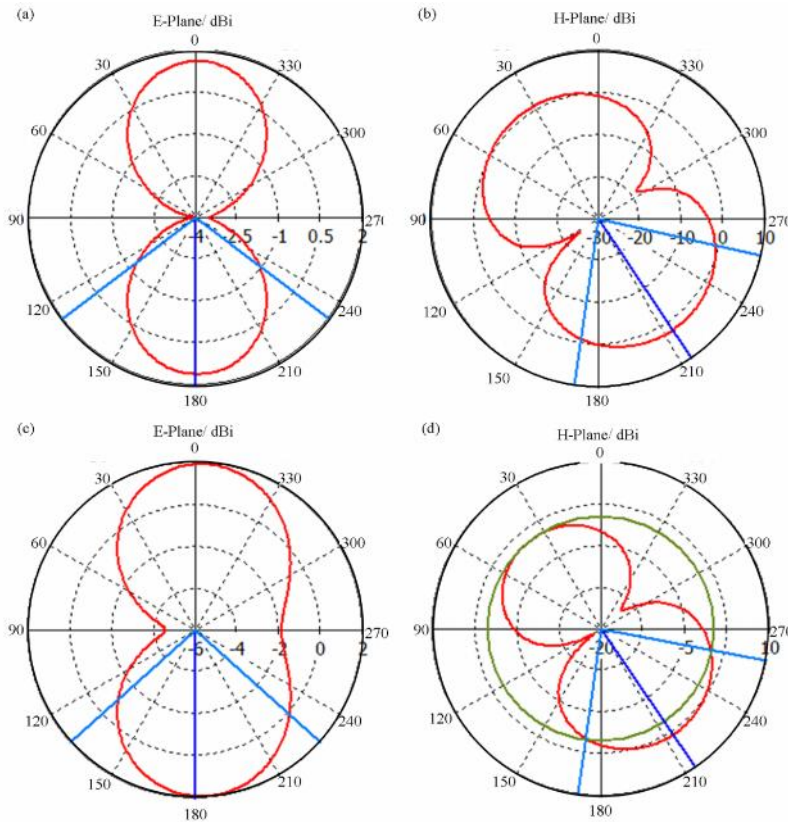

157
158
159

Fig. 6; Far field radiation patterns: (a) E-plane at Theta = 90° and (b) H-plane at Phi = 90° for 1.2 GHz. (c) E-plane at Theta = 90° and (D) H-plane at Phi = 90° for 1.6 GHz.

160
161

Table 2: Antenna array performance.

VALUES				
Performance	1.2 GHz	Sector 1	Main lobe magnitude	1.8 dB
			Main lobe direction	214.0°
			Beam Width	86.5°
		Sector 2	Main lobe magnitude	1.8 dB
			Main lobe direction	336.0°
			Beam Width	86.4°
		Sector 3	Main lobe magnitude	2.0 dB
			Main lobe direction	95.0°
			Beam Width	85.0°
	1.6 GHz	Sector 1	Main lobe magnitude	2.9 dB
			Main lobe direction	214.0°
			Beam Width	87.5°
		Sector 2	Main lobe magnitude	2.9 dB
			Main lobe direction	335.0°
			Beam Width	87.4°
		Sector 3	Main lobe magnitude	2.8 dB
			Main lobe direction	96.0°
			Beam Width	87.8°

162
163
164
165
166

The validation is attempted using another solver based on FD formulations to study the antenna array performance. An excellent agreement is achieved in terms of S-parameters and radiation patterns as can be seen in Fig. 7.

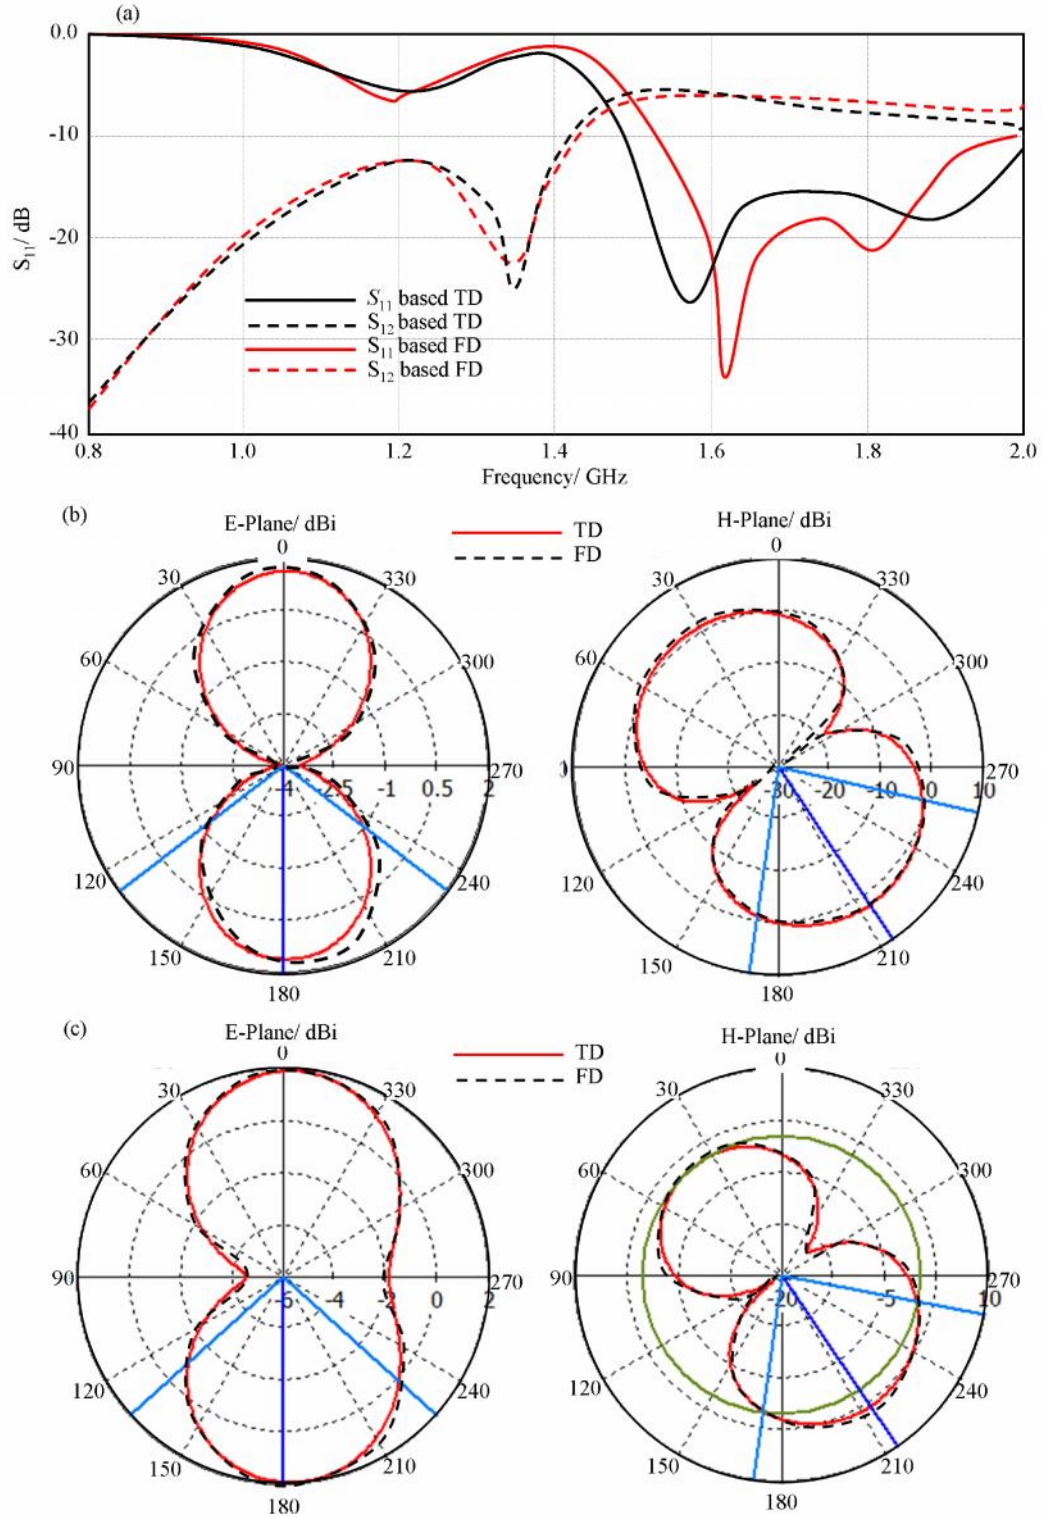


Fig. 7; Antenna performance validation using TD and FD formulations based on CST MWS 3 patches ON: (a) S_{11} , (b) Radiation patterns at 1.2 GHz, (c) Radiation Patterns at 1.6 GHz.

4. CONCLUSION

The eliminating of frequency reuse principle in the mobile Ad Hoc system using MIMO antenna array among the sectors of the unit cell is inspected in this paper. To realize this achievement, an antenna array of size of $10 \times 10 \text{ cm}^2$ is considered with using high diversity among antenna sectors. The single antenna sector is constructed from three patches that are connected to feeding transmission network through pin diodes, as switches, that are erected on an FR-4 substrate. Each single element of the antenna differentiated in the space with 120° rotationally. The antenna performance is characterized from 0.8 GHz to 2 GHz in terms of S-parameters and radiation patterns with different switching OFF/ON strategies. It is found that the antenna low correlation factor and end fire radiation at the main lobe direction around 1.2 GHz and 1.5 GHz. A numerical investigation based on FIT is conducted using CST MWS to evaluate the antenna performance. Finally, two different numerical solutions based on TD and FD solvers for CST MWS formulations are conducted to perform a validation for the achieved results.

ACKNOWLEDGEMENTS

The authors would like to thank the Engineering Collage/ Department of Electrical Engineering at UPM for their valuable support during the numerical simulations.

REFERENCES

1. G.J. Foschini and M.J. Gans, "On limits of wireless communications in a fading environment when using multiple antennas," *Wireless Personal Communications*, vol. 6, no. 3, pp. 311–335, 1998.R.
2. Vaughan and J. Andersen, "Antenna diversity in mobile communications," *IEEE Transactions on Vehicular Technology*, vol. 36, no. 4, pp. 149– 172, Nov. 1987.
3. Quan, X. L., R.-L. Li, J. Y. Wang, and Y. H. Cui, Development of a broadband horizontally polarized omnidirectional planar antenna and its array for base stations," *Progress In Electromagnetics Research*, vol. 128, pp. 441-456, Dec. 2012.
4. Wei, K., Z. Zhang, and Z. Feng, Design of a dualband omnidirectional planar microstrip antenna array," *Progress In Electromagnetics Research*, vol. 126, pp. 101-120, Aug. 2012.
5. Costa, F., S. Genovesi, and A. Monorchio, A frequency selective absorbing ground plane for low-RCS microstrip antenna arrays," *Progress In Electromagnetics Research*, vol. 126, pp. 317-332, Mar. 2012.
6. Elwi, T. A., H. M. Al-Rizzo, N. Bouaynaya, M. M. Hammood, and Y. Al-Naiemy, \Theory of gain enhancement of UC-PBG antenna structures without invoking Maxwell's equations: An array signal processing approach," *Progress In Electromagnetics Research B*, vol. 34, pp. 15-30, Nov. 2011.
7. Wang, M., W. Wu, and D. Fang, Uniplanar single corner-FED dual-band dual-polarization patch antenna array," *Progress In Electromagnetics Research Letters*, vol. 30, pp. 41-48, May. 2012.
8. Abedin, M. F. and M. Ali, Effects of a smaller unit cell planar EBG structure on the mutual coupling of a printed dipole array," *IEEE Antennas and Wireless Propagation Letters*, vol. 4, pp. 274-276, Apr. 2005.
9. Xie, H.-H., Y.-C. Jiao, L.-N. Chen, and F.-S. Zhang, An effective analysis method for EBG reducing patch antenna coupling," *Progress In Electromagnetics Research Letters*, vol. 21, pp. 187-193, Oct. 2011.
10. Capet, N., C. Martel, J. Sokoloff, and O. Pascal, Optimum high impedance surface configuration for mutual coupling reduction in small antenna arrays," *Progress In Electromagnetics Research B*, vol. 32, pp. 283-297, Dec. 2011.

- 224 11. Yang, F. and Y. Rahmat-Samii, Microstrip antennas integrated with electromagnetic
225 band-gap (EBG) structures: A low mutual coupling design for array applications," *IEEE*
226 *Transactions on Antennas and Propagation*, vol. 51, no. 10, pp. 2936-2946, Oct. 2003.
- 227 12. J. Andersen and H. Rasmussen, "Decoupling and descattering networks for antennas,"
228 *IEEE Trans. Antennas Propag.*, vol. 24, no. 6, pp. 841-846, Nov. 1976.
- 229 13. S.-C. Chen, Y.-S. Wang and S.-J. Chung, "A decoupling technique for increasing the
230 port isolation between two strongly coupled antennas," *IEEE Trans. Antennas Propag.*,
231 vol. 56, no. 12, pp. 3650-3658, Dec. 2008.
- 232 14. D. Sievenpiper, L. Zhang, R. Broas, N. Alexopolous, and E. Yablonovitch, "High-
233 impedance electromagnetic surfaces with a forbidden frequency band," *IEEE Trans.*
234 *Microw. Theory Tech.*, vol. 47, no. 11, pp. 2059-2074, Nov 1999.
- 235 15. M. M. Bait-Suwallam, M. S. Boybay, and O. M. Ramahi, "Mutual coupling reduction in
236 MIMO antennas using artificial magnetic materials," in the 13th International Symp. on
237 Antenna Technology and Applied Electromagnetics (ANTEM/URSI), Feb. 2009, pp. 1-
238 4.
- 239 16. Lee, J.-H. and C.-C. Cheng, Spatial correlation of multiple antenna arrays in wireless
240 communication systems," *Progress In Electromagnetics Research*, vol. 132, 347-368,
241 Jul. 2012.
- 242 17. Lee, J.-H. and Y. L. Chen, Performance analysis of antenna array beamformers with
243 mutual coupling effects," *Progress In Electromagnetics Research B*, vol. 33, pp. 291-
244 315, Jun. 2011.
- 245 18. Rahmat-Samii, Y. and F. Yang, *Electromagnetic Band Gap Structure in Antenna*
246 *Engineering*, Cambridge University Press, Cambridge, UK, May. 2009.
- 247 19. Wang, T., Y.-Z. Yin, J. Yang, Y.-L. Zhang, and J.-J. Xie, Compact triple-band antenna
248 using defected ground structure for WLAN/WiMAX applications," *Progress In*
249 *Electromagnetics Research Letters*, vol. 35, pp. 155-164, Jan. 2012.
- 250 20. Iluz, Z., R. Shavit, and R. Bauer, Microstrip antenna phased array with electromagnetic
251 bandgap substrate," *IEEE Transactions on Antennas and Propagation*, vol. 52, no. 6,
252 pp. 1446-1453, Jun. 2004.
- 253 21. Rajo-Iglesias, E., O. Quevedo-Teruel, and L. Inclan-Sanchez, Mutual coupling reduction
254 in patch antenna arrays by using a planar EBG structure and multilayer dielectric
255 substrate," *IEEE Transactions on Antennas and Propagation*, vol. 56, no. 6, pp. 1648-
256 1655, Jun. 2008.
- 257 22. Chen, Z., Y.-L. Ban, J.-H. Chen, J. L.-W. Li, and Y.-J. Wu, Bandwidth enhancement of
258 LTE/WWAN printed mobile phone antenna using slotted ground structure," *Progress In*
259 *Electromagnetics Research*, vol. 129, pp. 469-483, Feb. 2012.
- 260 23. Wang, X., M. Zhang, and S.-J. Wang, Practicability analysis and application of PBG
261 structures on cylindrical conformal microstrip antenna and array," *Progress In*
262 *Electromagnetics Research*, vol. 115, 495-507, Nov. 2011.
- 263 24. Yuan, C. P. and T.-H. Chang, \Modal analysis of metal-stub photonic band gap
264 structures in a parallel-plate waveguide," *Progress In Electromagnetics Research*, vol.
265 119, pp. 345-361, Oct. 2011.
- 266 25. Ederra, I., J. C. Iriarte, R. Gonzalo, and P. de Maagt, Surface waves of finite size
267 electromagnetic band gap woodpile structures," *Progress In Electromagnetics*
268 *Research B*, vol. 28, pp. 19-34, May. 2011.
- 269 26. Li, Y., M. Fan, F. Chen, J. She, and Z. Feng, A novel compact electromagnetic-
270 bandgap (EBG) structure and its applications for microwave circuits," *IEEE*
271 *Transactions on Microwave Theory and Techniques*, vol. 53, pp. 183-190, Dec. 2005.
- 272 27. Xu, F., Z.-X. Wang, X. Chen, and X.-A. Wang, Dual band-notched UWB antenna based
273 on spiral electromagnetic-bandgap structure," *Progress In Electromagnetics Research*
274 *B*, vol. 39, pp. 393-409, Jul. 2012.
- 275 28. Alam, M. S., M. T. Islam, and N. Misran, Performance investigation of a uni-planar
276 compact electromagnetic bandgap (UC-EBG) structure for wide bandgap

- characteristics," *Proceedings of the 2012 Asia-Pacific Symposium on Electromagnetic Compatibility (APEMC)*, pp. 637-640, Singapore, May 2012.
29. Yu, A. and X. Zhang, "A novel method to improve the performance of microstrip antenna arrays using a dumbbell EBG structure," *IEEE Antennas and Wireless Propagation Letters*, vol. 2, pp. 170-172, May, 2003.
30. Fei, H., H. Guo, X. Liu, and Y. Wang, "A novel compact EBG structure for mutual coupling reduction in a patch array," *PIERS Proceedings*, pp. 615-618, Suzhou, China, Sep. 12-16, 2011.
31. Assimonis, S. D., T. V. Yioultsis, and C. S. Antonopoulos, "Computational investigation and design of planar EBG structures for coupling reduction in antenna applications," *IEEE Transactions on Magnetics*, vol. 48, no. 2, pp. 771-774, Sep. 2012.
32. Elsheikh, D. N., M. F. Iskander, E. A. Abdallah, H. A. Elsadek, and H. Elhenawy, "Microstrip array antenna with new 2D-electromagnetic band gap structure shapes to reduce harmonics and mutual coupling," *Progress In Electromagnetics Research C*, vol. 12, pp. 203-213, Jun. 2010.
33. CST Microwave Studio, 2013. 10th Version. Available at: <http://www.cst.com>.