

Dualisms and Symmetries in Physical Exergy Property and Generalized Formulation Related to the Carnot and Joule Cycles

Pierfrancesco Palazzo^{1*}

¹Technip, Viale Castello della Magliana 68, 00148 Rome, Italy.

ABSTRACT

The aim of the present study is to propose a generalized formulation of physical exergy property for a system interacting with a generalized reservoir consisting of independent reservoirs at constant temperature and constant pressure **respectively**. Physical exergy components are thermal exergy and mechanical exergy representing contributions by useful work and useful heat as outcomes of the available energy related to a composite system-reservoir and converted by means of the Carnot and Joule cycles. The demonstration of this generalized formulation, **as an additive and non-negative state property**, utilizes the method constituted by the categories of dualism and symmetry adopted to prove that work depends on pressure as heat depends on temperature when a system interacts with independent isobaric reservoir and isothermal reservoirs.

Keywords: Available energy, useful work, useful heat, Carnot cycle, Joule cycle, thermal exergy, mechanical exergy, generalized physical exergy, generalized reservoir, isothermal reservoir, isobaric reservoir

DEFINITIONS, ACRONYMS, ABBREVIATIONS

A	generic system
C_p	specific heat at constant pressure ($J \cdot kg^{-1} \cdot K^{-1}$)
C_v	specific heat at constant volume ($J \cdot kg^{-1} \cdot K^{-1}$)
EX	exergy (J)
id	ideal
K	ratio of C_p over C_v
P	pressure (Pa)
Q	heat (J)
$\bar{R}$	universal gas constant ($J \cdot kg^{-1} \cdot K^{-1}$)
T	absolute temperature (K)
U	internal energy (J)
V	volume ($m^3 \cdot kg^{-1}$)
W	work (J)

*Corresponding author: E-mail: ppalazzo@technip.com;

36 Greek symbols

37

38 η cycle efficiency

39 ε $\frac{K-1}{K}$

40

41 Superscripts and Subscripts

42

43 *DIR* direct cycle

44 *INV* inverse cycle

45 *id* ideal

46 *HP* high pressure

47 *HT* high temperature

48 *LP* low pressure

49 *LT* low temperature

50 *M* mechanical

51 *T* thermal

52 *R* reservoir

53

54 1. PREMISE

55

56 The present study constitutes the second and conclusive part of a theoretical analysis aimed
57 at generalizing the canonical formulation of physical exergy property. The first part of this
58 study, already published by the Author [1], proves that the physical exergy is expressed by
59 means of the thermal and mechanical contributions relating to useful heat, depending on the
60 pressure difference between system and isobaric reservoir, and useful work, depending on the
61 temperature difference between system and isothermal reservoir. In this perspective,
62 useful work is the result of Carnot cycle direct conversion and useful heat is the result of
63 Joule cycle inverse conversion. Both useful work and useful heat are the outcome of
64 conversion process of available energy of a system interacting with a "generalized reservoir"
65 at constant temperature and constant pressure and behaving as isothermal and isobaric
66 independent reservoirs.

67

68 2. INTRODUCTION

69

70 Physical exergy is defined as the maximum net useful work and heat flowing through the
71 boundaries of and within a system interacting with a reservoir in stable equilibrium state.
72 Reversible ideal processes constitute exergy losses determining physical exergy.
73 Irreversible interactions and transport phenomena determine exergy destruction [2]. Being
74 additive and non-negative, physical exergy is suitable to account for the balance of
75 contributions, coming from each subsystem, to the total amount of the overall composite as
76 proved by Gaggioli [3]. The assertion that "work is not better than heat" as equivalent and
77 inter-convertible forms of interaction has been conceived by Gaggioli [3,4,5] so that "no
78 distinction between heat and work" is necessary. Hence, physical exergy can be withdrawn
79 in the form of useful work or useful heat or any combination, no matter the process
80 connecting the initial and final states of the system [3,4,5,6]. The intention is here to
81 formulate thermal exergy, relating to useful work, and mechanical exergy, relating to useful
82 heat, as additive and non-negative components. These contributions are combined in a
83 formulation of the generalized physical exergy of a system interacting with a "generalized

reservoir" - constituted by independent isothermal and isobaric reservoirs - according to the following expression:

$$EX^{PHYSICAL} = EX_{REV}^T + EX_{REV}^M \quad (1)$$

The aim is to demonstrate the procedure leading to the formulation of EX_{REV}^T and EX_{REV}^M and to demonstrate that the generalized physical exergy $EX^{PHYSICAL}$ as an additive and non-negative state property as well. The configuration adopted is constituted by a system A and two independent reservoirs at constant temperature (isothermal) and constant pressure (isobaric) here referred to as "generalized reservoir" each defined according to the conditions and constraints specified by Gyftopoulos and Beretta [7].

3. METHOD OF DUALISM AND SYMMETRY

As far as method is concerned, a dual perspective, induced by the thermal and mechanical aspects and by the correlations existing between them, is assumed in order to discuss the two components of physical exergy directly correlated to temperature and pressure as well as to heat and work interactions between a system and a reservoir.

The principle of symmetry, formulated in geometry to govern the correspondence of two or more elements with respect to a reference entity, is adopted to analyze the properties of exergy quantity and the thermodynamic cycles used for its definition taking temperature and pressure as "reference entities for symmetry".

The procedure demonstrated here does not intentionally address to the entropy property in order to base arguments on the concept of physical exergy defined solely by means of ideal cycles generalized for any real non-cyclic process. This approach relies on the rationale that entropy can be derived from energy and exergy which should be previously defined as reported in the literature [7].

The assumptions adopted in the present Second Part remain unchanged with respect to those posited in the First Part of this study [1].

4. DUALISM IN PHYSICAL EXERGY

The existence of useful heat and useful work, both resulting from available energy, constitutes the dualism that features the concept of physical exergy and its components [2,3,4,5]. Of these, the calculation of useful heat or useful work can be obtained by evaluating heat interaction only alongside an isovolumic reversible process and work interaction only alongside an adiabatic reversible process. These two processes are adopted to accomplish the whole process in sequence connecting any two states by separated contributions. More in general, indeed, any two different states in a bi-dimensional diagram related to any couple of thermodynamic properties can always be connected by two consecutive portions of any type of polytropic elaboration since they constitute a system of two equations with two variables as follows:

$$PV^m = a \quad \text{and} \quad PV^n = b \quad (2)$$

where m, n are real numbers and a, b are variable parameters.

In particular, the evaluation of work interaction addresses the pressure level at which work itself is exchanged with respect to the pressure of the reservoir. Since the Joule cycle is

characterized by an expression of efficiency that depends on pressure only, and by virtue of its properties [1], it can be adopted to replicate the formal method used to evaluate heat interaction by means of the Carnot cycle that depends on temperature only.

The efficiency of the Joule cycle becomes the evaluation factor of the available energy of a system A interacting with a reservoir R by means of the work transmitted alongside an adiabatic expansion or compression process. Figure 1 illustrates out an elementary portion of the expansion adiabatic reversible process curve producing an elementary work quantity released, at constant pressure, as an input of the Joule inverse cycle that converts, at constant pressure, this elementary quantity of work into an elementary quantity of useful heat. This mechanism is similar to the one used to evaluate the exergetic content associated to the amount of heat utilising the efficiency of the Carnot direct cycle that converts, at constant temperature, an elementary quantity of heat, along an isovolumic process, into an elementary quantity of useful work as also represented in Figure 1.

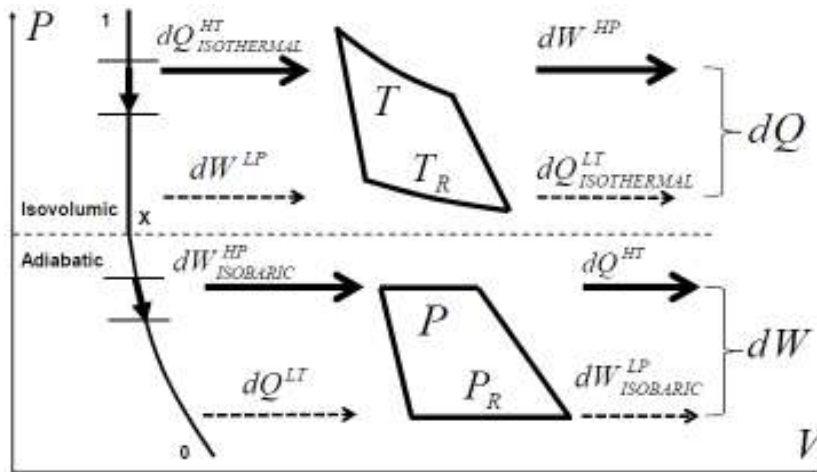


Figure 1 – Isovolumic-Adiabatic process (1-X-0) connecting any two states

The mathematical formulations of these two definitions, in infinitesimal terms, are reported below.

Elementary useful work associated with thermal exergy:

$$\begin{aligned} dEX_{REV}^T &= dW = \eta_{id}^{CARNOT \cdot DIR} \cdot dQ_{ISOTHERMAL}^{HT} \\ &= \left(1 - \frac{T_R}{T}\right) \cdot dQ_{ISOTHERMAL}^{HT} \end{aligned} \quad (3)$$

expressing the elementary quantity of useful work that can be extracted from an elementary quantity of heat available at constant temperature;

Elementary useful heat associated with mechanical exergy:

$$dEX_{REV}^M = dQ = \eta_{id}^{JOULE\cdot INV} \cdot dW_{ISOBARIC}^{HP}$$

$$= \left[1 - \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} \right] \cdot dW_{ISOBARIC}^{HP} \quad (4)$$

expressing the elementary quantity of useful heat that can be extracted from an elementary quantity of work available at constant pressure.

The reason for calculating physical exergy alongside a combined and sequential isovolumic-adiabatic (or adiabatic-isovolumic) process is to isolate the heat interaction and the work interaction with respect to the thermal reservoir and mechanical reservoir. This dual process can always connect any two states constituting proof that physical exergy is a state property. Nevertheless, by way of further confirmation, this method has a close analogy with the one proposed by Kotas [8] in which the thermal and mechanical components of physical exergy are calculated between any pair of states correlated by an isothermal-isobaric (or isobaric-isothermal) process. This implies that mathematical integration through the whole process corresponds to the thermal and mechanical conversion processes that occur at high temperature (isothermal) and high pressure (isobaric) respectively. Therefore, useful work and useful heat, corresponding to specific work and specific heat, are represented by the area enclosed within the Carnot and Joule cycles respectively. The model of the ideal system and reversible processes is here adopted because it represents the theoretical limit corresponding to “maximum net” useful work and or useful heat expressed by physical exergy, and in particular by its thermal and mechanical components [1].

5. SYMMETRY IN PHYSICAL EXERGY

The formulation of physical exergy, in infinitesimal terms, derives from the relationship built around the efficiency of the Carnot cycle. Such a formulation expresses the role played by temperature in determining the amount of converted thermal energy and heat, which for this reason may be more specifically defined as thermal exergy [1,8,9],

$$dEX_{REV}^T = dW$$

$$= \eta_{id}^{CARNOT \cdot DIR} \cdot dQ_{ISOTHERMAL}^{HT} = \left(1 - \frac{T_R}{T} \right) \cdot dQ_{ISOTHERMAL}^{HT} \quad (5a)$$

$$= \eta_{id}^{JOULE \cdot DIR} \cdot dQ_{ISOBARIC}^{HT} = \left[1 - \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} \right] \cdot dQ_{ISOBARIC}^{HT} \quad (5b)$$

in which $dQ_{ISOTHERMAL}^{HT}$ represents the elementary heat exchanged along the isothermal process at the highest temperature T of the Carnot cycle and $dQ_{ISOBARIC}^{HP}$ represents the elementary heat exchanged along the isobaric process at the highest pressure P . In particular, the efficiency of the Carnot direct cycle appearing in the above equations, can be written as follows,

$$\eta_{id}^{CARNOT \cdot DIR} = \frac{W}{Q_{HT}} = \frac{W^{HP} - W^{LP}}{Q_{HT}}$$

$$= \frac{W^{HP} - W^{LP}}{W^{HP}} = \frac{Q^{HT} - Q^{LT}}{Q^{HT}} \quad (6)$$

201

202 while, for the inverse Carnot cycle, if the roles of used heat Q^{HT} and utilized total work W
 203 are replaced by used work W^{HP} and utilized total heat Q , the following expression applies
 204 (which does not correspond to the Coefficient of Performance reported in the literature
 205 [10,11]),
 206

$$\begin{aligned} \eta_{id}^{CARNOT-INV} &= \frac{Q}{W^{HP}} = \frac{Q^{HT} - Q^{LT}}{W^{HP}} \\ &= \frac{Q^{HT} - Q^{LT}}{Q^{HT}} = \frac{W^{HP} - W^{LP}}{W^{HP}} = \eta_{id}^{CARNOT-DIR} \end{aligned} \quad (7)$$

209

210 Due to the linear proportionality of the two expressions and the identity of two of the terms,
 211 the meaning of used heat Q^{HT} in the direct cycle thus corresponds to the meaning of used
 212 work W^{HP} in the inverse cycle; vice-versa, the meaning of utilized total work W in the direct
 213 cycle corresponds to the meaning of utilized total heat Q in the inverse cycle, thus
 214 constituting a symmetry in Carnot cycle thermo-mechanical conversion. The applicability of
 215 this conclusion is also confirmed by the properties of the Carnot cycle that remain
 216 unchanged for real systems characterized by a state equation that differs from the one
 217 describing the ideal systems here assumed [12,13,14].

218 Once the exergy formulated by the direct cycle is defined as thermal exergy which highlights
 219 the role of temperature in heat-to-work conversion, the definition of the related mechanical
 220 exergy can be set as the exergy expressed by the inverse cycle. In this case, the role of
 221 pressure replaces the role of temperature in the opposite conversion, that is, from work into
 222 heat. Moreover, input or output heat and work amounts are equal for isothermal or isobaric
 223 processes.

224

225 On the other side, physical exergy also encompasses the contribution of mechanical exergy
 226 [1] which may be expressed, in infinitesimal terms, by the following relationship [1,8,9]:
 227

$$dEX_{REV}^M = dQ$$

$$= \eta_{id}^{CARNOT-INV} \cdot dW_{ISOTHERMAL}^{HP} = \left(1 - \frac{T_R}{T}\right) \cdot dW_{ISOTHERMAL}^{HP} \quad (8a)$$

$$= \eta_{id}^{JOULE-INV} \cdot dW_{ISOBARIC}^{HP} = \left[1 - \left(\frac{P_R}{P}\right)^{\frac{K-1}{K}}\right] \cdot dW_{ISOBARIC}^{HP} \quad (8b)$$

231

232 in which $dW_{ISOTHERMAL}^{HP}$ represents the infinitesimal work exchanged along the isothermal
 233 process at the highest temperature T of the Carnot cycle and $dW_{ISOBARIC}^{HP}$ represents the
 234 infinitesimal work exchanged through the isobaric process at the highest pressure P .

Equations (8a) and (8b) show the elementary work exchanged at high pressure along the higher temperature isothermal curve of the cycle and in which the role of pressure related to work is homologous to and symmetrical with the role of temperature related to heat. Consequently, mechanical exergy would in turn express a relationship between work and pressure that is symmetrical to the relationship between heat and temperature expressed by thermal exergy.

On the basis of the relationship between the Carnot and Joule cycles, the same observations made for the efficiency of the direct and inverse Carnot cycle apply to the Joule cycle. However, unlike what occurs with the isothermal curves, such quantities exchanged along the isobaric curves are not equal but differ by one constant,

$$Q^{HT} = C_p \cdot (T_{1J} - T_1); \quad W^{HP} = \bar{R} \cdot (T_1 - T_{1J}) \quad (9)$$

$$\frac{W^{HP}}{Q^{HT}} = -\frac{\bar{R}}{C_p} = -\frac{C_p - C_v}{C_p} = -\left(1 - \frac{1}{K}\right) = \frac{1 - K}{K} = -\varepsilon \quad (10)$$

$$W^{HP} = -\varepsilon Q^{HT} \Rightarrow Q^{HT} = -\frac{1}{\varepsilon} W^{HP} \quad (11)$$

From a formal standpoint the result is the same as the one obtained for the Carnot cycle. In fact, for the Joule direct cycle,

$$\begin{aligned} \eta_{id}^{JOULE-DIR} &= \frac{W}{Q^{HT}} = \frac{Q^{HT} - Q^{LT}}{Q^{HT}} \\ &= -\frac{1}{\varepsilon} \frac{W^{HP} - W^{LP}}{Q^{HT}} = \frac{W^{HP} - W^{LP}}{W^{HP}} \end{aligned} \quad (12)$$

In which the contribution of heat and work is due exclusively to the isobaric processes along which heat and work is converted and exchanged simultaneously in directly proportional amounts.

Thus the following applies to the Joule inverse cycle:

$$\begin{aligned} \eta_{id}^{JOULE-INV} &= \frac{Q}{W^{HP}} = \frac{Q^{HT} - Q^{LT}}{W^{HP}} \\ &= \frac{Q^{HT} - Q^{LT}}{-\varepsilon Q^{HT}} = \frac{W^{HP} - W^{LP}}{-\varepsilon W^{HP}} = \frac{1}{\varepsilon} \eta_{id}^{JOULE-DIR} \end{aligned} \quad (13)$$

Hence, the ratio between direct cycle and inverse cycle efficiencies is in turn constant,

$$\frac{\eta_{id}^{JOULE-DIR}}{\eta_{id}^{JOULE-INV}} = \varepsilon = const \quad (14)$$

The fact that there is a constant relationship between the efficiency of the direct and inverse Joule cycles means that, for both cycles, efficiency is characterized by identical expressions

except for a constant factor, establishing a linear proportionality. This makes it possible to replicate, for the Joule cycle, the same symmetry between thermal exergy and mechanical exergy demonstrated for the Carnot cycle.

6. THERMAL AND MECHANICAL CONTRIBUTIONS TO PHYSICAL EXERGY

As previously assumed, a thermodynamic process connecting any two states can always be composed by means of any two independent processes consisting of, but not limited to, the isovolumic and adiabatic sequence (or, in the opposite sequential order, adiabatic and isovolumic). These two processes are respectively characterized by an exchange, with the reservoir, of heat interaction only and work interaction only and can therefore be assumed as components of physical exergy [1]. Hence, resulting (total) physical exergy can be derived from the sum of the contributions due to the thermal exergy calculated for the isovolumic process and the mechanical exergy calculated for the adiabatic process expressing the net useful heat and net useful work respectively. To summarize the arguments of the previous sections:

- (i) dualism: useful work is the thermal exergy calculated for an isovolumic process; useful heat is the mechanical exergy calculated for an adiabatic process;
- (ii) symmetry: thermal exergy is useful work related to temperature; mechanical exergy is useful heat related to pressure.

The distinction between direct and inverse cycle is no longer necessary due to the proportionality of respective efficiency. This ensures that the physical exergy equation is **generally valid** for any total process and heat and or work interaction directions with respect to the reservoir, from the initial state to the final state of the whole process.

In finite terms, the formal expression of the thermal exergy related to the isovolumic process depending on temperature represented in Figure 1 is derived by integrating Equation (5a) or (8a):

$$\begin{aligned}
 EX_{REV}^T &= \int_{ISOVOLUMIC} dEX_{ISOTHERMAL}^T = \int_{ISOVOLUMIC} \eta_{id}^{CARNOT} \cdot dQ_{ISOTHERMAL}^{HT} \\
 &= \int_{ISOVOLUMIC} \left(1 - \frac{T_R}{T} \right) \cdot dQ_{ISOTHERMAL}^{HT} \quad (15)
 \end{aligned}$$

This equation expresses maximum net useful work converted from heat interaction at a given temperature along an isovolumic process.

In finite terms, the formal expression of the mechanical exergy related to the adiabatic process depending on pressure is deduced by integrating Equations (5b) or (8b):

$$\begin{aligned}
 EX_{REV}^M &= \int_{ADIABATIC} dEX_{ISOBARIC}^M = \int_{ADIABATIC} \eta_{id}^{JOULE} \cdot dW_{ISOBARIC}^{HP} \\
 &= \int_{ADIABATIC} \left[1 - \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} \right] \cdot dW_{ISOBARIC}^{HP} \quad (16)
 \end{aligned}$$

This equation expresses the maximum net useful heat converted from work interaction at a given pressure along an adiabatic process.

315 Upon combining useful work and useful heat for any process, physical exergy is defined as
 316 sum of its two components and is formulated by the relation:
 317

$$318 \quad EX^{PHYSICAL} = EX_{REV}^T + EX_{REV}^M = \Delta U^{SYSTEM} + \Delta U^{RESERVOIR} \quad (17)$$

319
 320 This expression can be further developed by using formulations (15) and (16) set forth by
 321 calculating the thermal exergy of the isovolumic process and the mechanical exergy of the
 322 adiabatic process.
 323

324 The thermal exergy of the isovolumic process:
 325

$$326 \quad EX_{REV}^T = \int_X^1 dQ_{ISOTHERMAL}^{HT} - T_R \int_X^1 \frac{dQ_{ISOTHERMAL}^{HT}}{T}$$

327
 328 since $dQ_{ISOTHERMAL}^{HT} = C_v dT$ in the last expression :
 329

$$330 \quad = \int_X^1 C_v dT - T_R \int_X^1 \frac{C_v dT}{T} = (U_1 - U_X) - T_R C_v \int_X^1 \frac{dT}{T} \quad (18)$$

331
 332 thermal exergy is therefore expressed as:
 333

$$334 \quad EX_{REV}^T = W_{REV}^{CONVER} + W_{REV}^{TRANSF} = \Delta U_Q^{SYSTEM} + \Delta U_Q^{RESERVOIR}$$

$$335 \quad = (U_1 - U_X) - C_v T_R (\ln T_1 - \ln T_X) + Q_R \quad (19)$$

336
 337 where $Q_R = -\bar{R}T_R (\ln V_1 - \ln V_0)$ represents the amount of heat interaction - over the entire
 338 process (isovolumic-adiabatic or adiabatic-isovolumic) - delimited between initial state 1 and
 339 final state 0, which does not undergo conversion into useful work because it is directly
 340 released to the thermal reservoir with a corresponding reversible energy transfer
 341 $\Delta U_Q^{RESERVOIR}$.

342
 343 The mechanical exergy of the adiabatic process:
 344

$$345 \quad EX_{REV}^M = \int_0^X dW_{ISOBARIC}^{HP} - \int_0^X \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} dW_{ISOBARIC}^{HP}$$

$$346 \quad = \int_0^X dW_{ISOBARIC}^{HP} - \int_0^X \left(\frac{P_R}{P} \right) \cdot \left(\frac{P_R}{P} \right)^{\frac{1}{K}} dW_{ISOBARIC}^{HP}$$

347 considering that $\left(\frac{P_R}{P} \right)^{\frac{1}{K}} = \frac{V_R}{V}$ applies to the adiabatic process:

$$= \int_0^X dW_{ISOBARIC}^{HP} - P_R V_R \int_0^X \frac{dW_{ISOBARIC}^{HP}}{P V}$$

349

350 since $dW_{ISOBARIC}^{HP} = -PdV$ in the last expression :

351

$$= - \int_0^X PdV + P_R V_R \int_0^X \frac{dV}{V}$$

$$= (U_X - U_0) + P_R V_R (\ln V_X - \ln V_0) \quad (20)$$

354

355 mechanical exergy is therefore expressed as:

356

$$EX_{REV}^M = Q_{NET}^{CONVER} + Q_{NET}^{TRANSF} = \Delta U_W^{SYSTEM} + \Delta U_W^{RESERVOIR}$$

$$= (U_X - U_0) + P_R V_R (\ln V_X - \ln V_0) + W_R \quad (21)$$

359

360 where $W_R = P_R (V_1 - V_0)$ represents the amount of heat interaction - over the entire process
 361 (isovolumic-adiabatic or adiabatic-isovolumic) - delimited between the initial state 1 and the
 362 final state 0, which does not undergo conversion into useful heat because it is directly
 363 released to the mechanical reservoir with a corresponding reversible energy transfer
 364 $\Delta U_W^{RESERVOIR}$.

365

366 Finally, the sum of the two contributions - EX_{REV}^T , Equation (19) and - EX_{REV}^M , Equation
 367 (21) constitutes the formulation of physical exergy. Since the state equation $P_R V_R = \bar{R}T_R$ is
 368 applicable and since $V_X = V_1$ and if the work exchanged with the mechanical reservoir at
 369 pressure P_R is also considered, the formulation is:

370

$$EX^{PHYSICAL} = EX_{REV}^T + EX_{REV}^M$$

$$= W_{REV}^{CONVER} + Q_{NET}^{CONVER} + W_{REV}^{TRANSF} + Q_{NET}^{TRANSF} = \Delta U_{W,Q}^{SYSTEM} + \Delta U_{W,Q}^{RESERVOIR} \quad (22)$$

373

$$EX^{PHYSICAL} = EX_{REV}^T + EX_{REV}^M = (U_1 - U_0)$$

$$- C_V T_R (\ln T_1 - \ln T_0) + P_R V_R (\ln V_1 - \ln V_0)$$

$$- \bar{R}T_R (\ln V_1 - \ln V_0) + P_R (V_1 - V_0) \quad (23)$$

377

378 This generalized formulation is "hybrid" in the sense that it conforms to the canonical if the
 379 term $P_R V_R$ is equal to the term $\bar{R}T_R$, that is, if a unique, or a dual, external system
 380 behaves as a thermal reservoir and mechanical reservoir where $P_R V_R = \bar{R}T_R$.

381 With respect to canonical exergy formulation, the term $P_R V_R (\ln V_1 - \ln V_0)$ represents the
 382 additional addendum taking into account exergy in the form of useful heat. This generalized
 383 formulation expresses the physical exergy resulting from the dualism related to the

equivalence of useful heat or useful work. The additional addendum makes maximum net useful heat equal to maximum net useful work, as postulated according to the concept of equivalence. In effect, useful work, calculated between two arbitrary states along any adiabatic reversible process, is not equal to the useful heat alongside any other process connecting the same initial and final states (with an invariable difference of internal energy) [1]. Nevertheless, this equality is restored if the useful heat is converted into useful work which is therefore identical to the one initially calculated alongside the adiabatic process. This rationale is valid provided the inversion of useful work with useful heat is in accordance with the concepts of equivalence and inter-convertibility. Thus, this final equation, including the additional term, is the result of the dualism characterized by the equivalence and the symmetry related to the inter-convertibility of the mechanical exergy into thermal exergy and the thermal exergy into mechanical exergy. In other words, the former is the mechanical exergy of thermal exergy and the latter is the thermal exergy of mechanical exergy or, in more synthetic terms, the exergy of exergy.

It is worth noting that if the isovolumic-adiabatic (or adiabatic-isovolumic) process, connecting two generic states of the system, is replaced by an isobaric-isothermal (or isothermal-isobaric) process between the same two states in Figure 2, then the resulting expression of physical exergy is identical for the two different dual processes. The proof is given below considering that, in the isobaric and isothermal processes, in which the thermo-mechanical conversion occurs, heat and work interactions are simultaneous (and not sequential), hence physical exergy must be evaluated as the result of both thermal exergy and mechanical exergy combined together through the same process.

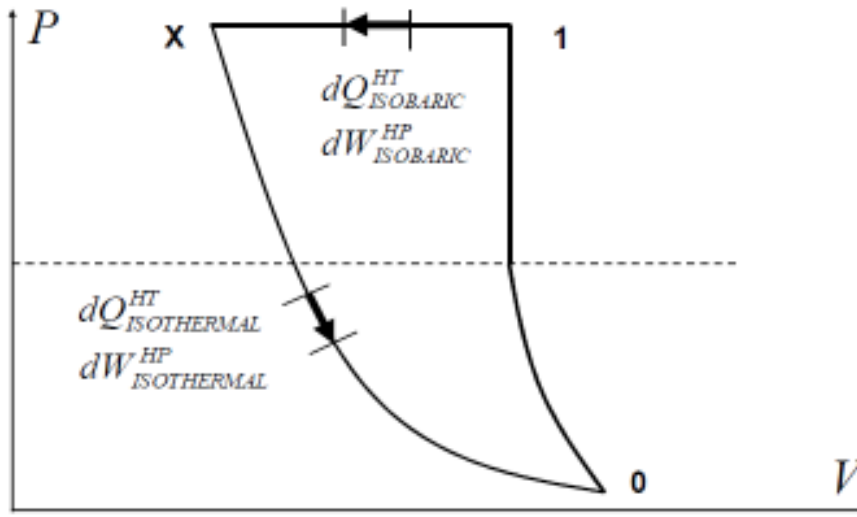


Figure 2 – Isobaric-Isothermal process (1-X-0) connecting any two states

With reference to the isobaric process and the associated Joule cycle, considering that:

$$dQ_{ISOBARIC}^{HT} = C_p d(T - T_R); \quad \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} = \frac{T_R}{T}; \quad \frac{V_1}{V_X} = \frac{T_1}{T_X} \quad \text{then the thermal exergy,}$$

calculated by the equation (5b), becomes:

$$EX_{ISOBARIC}^T = C_p (T_1 - T_X) - \int_1^X \left(\frac{T_R}{T} \right) \cdot C_p dT$$

$$= (U_1 - U_X)^T - \bar{R}T_R (\ln V_1 - \ln V_X) - C_V T_R (\ln T_1 - \ln T_X) \quad (24)$$

and the mechanical exergy calculated by Equation (8b), considering that $dW_{ISOBARIC}^{HP} = -(P - P_R) \cdot dV$, becomes:

$$EX_{ISOBARIC}^M = \int_1^X dW_{ISOBARIC}^{HP} - \int_1^X \left(\frac{P_R}{P} \right)^{\frac{K-1}{K}} dW_{ISOBARIC}^{HP} \\ = (U_1 - U_X)^M + P_R V_R (\ln V_1 - \ln V_X) + P_R (V_1 - V_X) \quad (25)$$

With reference to the isothermal process and the associated Carnot cycle, considering that $dQ_{ISOTHERMAL}^{HT} = \bar{R}T (\ln V_X - \ln V_0)$ and $dW_{ISOTHERMAL}^{HP} = -P V (\ln V_X - \ln V_0)$ the thermal exergy calculated by the Equation (5a) becomes:

$$EX_{ISOTHERMAL}^T = \bar{R}T (\ln V_X - \ln V_0) - \bar{R}T_R (\ln V_X - \ln V_0) \quad (26)$$

and the mechanical exergy calculated by the Equation (8a), also considering that $dW_{ISOTHERMAL}^{HP} = -(P - P_R) \cdot dV$, becomes:

$$EX_{ISOTHERMAL}^M = -\bar{R}T (\ln V_X - \ln V_0) \\ + P_R V_R (\ln V_X - \ln V_0) + P_R (V_X - V_0) \quad (27)$$

The sum of the addenda expressed by Equations (24), (25), (26), (27) is identical to Equation (23): this result confirms that the generalized physical exergy does not depend on any particular process and is therefore a state property that can indeed be considered as a formulation valid for any process connecting two different thermodynamic states. Furthermore, the definitions of the two components of exergy are valid for cyclical and non-cyclical processes between any two thermodynamic states, so that the generalized physical exergy, resulting from the algebraic sum of two additive state properties, is additive as well. The expression of the generalized physical exergy set forth can also be represented in terms of useful work and useful heat in compliance with the initial definition:

$$EX^{PHYSICAL} = EX_{REV}^T + EX_{REV}^M = W_{REV}^{NET} + Q_{REV}^{NET} \\ = W_{REV}^{CONVER} + W_{REV}^{TRANSF} + Q_{REV}^{CONVER} + Q_{REV}^{TRANSF} \quad (28)$$

where "CONVER" identifies the useful work W_{REV}^{CONVER} or heat Q_{REV}^{CONVER} resulting from reversible "REV" conversion of heat or work respectively; "TRANSF" identifies the nonuseful work or heat directly transferred to the reservoir, hence: $NET = CONVER + TRANSF = USEFUL + NONUSEFUL = NET\ USEFUL$ work W_{REV}^{NET} or heat Q_{REV}^{NET} according to the canonical definition here reported as outset of Section 2.

The procedure adopted in the present analysis is based on thermo-mechanical conversion cycles and leads to a definition of the components contributing to the physical exergy

expressed by Equation (27). Nevertheless, it should be noted that this equation corresponds to, and is consistent with, the formulation of physical exergy derived using a different procedure based on entropy property [15].

7. CONCLUSIONS

To summarize the results of the whole study, a formulation of generalized physical exergy in relation to pressure, together with temperature, is proposed and takes into account the combination of work interaction and heat interaction between a system and a generalized reservoir [1]. This conclusion is derived from the concept of equivalence and inter-convertibility of useful work and useful heat conceived by Gaggioli and is obtained by expressing the specific work of the Joule cycle which converts work into heat in isobaric processes, and the Carnot cycle which converts heat into work in isothermal processes.

The assumption that the system is ideal (perfect gas) and that the processes are reversible has been posited in order to demonstrate that the results of this analysis can be deduced to formulate the theoretical maximum amount of physical exergy. Such conclusions may however be considered as general and remain valid even for real systems characterized by a more general form of state equation for which the validity of Carnot's theorem is proven [12,13,14]. This expression remains valid for the criterion of exergo-environmental or exergo-economic analysis based on the concepts of "avoidable/unavoidable" and "endogenous/exogenous" exergy destruction [16,17], unaffected by this generalized definition of physical exergy which, on the other side, deals with exergy losses with respect to the control volume comprising the composite of system and reservoir. The results of the present research are applicable, by way of example, to the evaluation of the different impact in plant design if two shafts deliver the same output power – higher torque and lower speed or lower torque and higher speed – which cannot be considered as equivalent from the exergy method perspective and therefore require specific analysis to assess an optimized architecture of the system producing the input power. Another example is the exergy method applied to the design of Compressed Air Energy Storage (CAES) systems for Liquefied Natural Gas (LNG) liquefaction and regasification plants [18].

A possible future research development may be the application to open steady-state flow systems. In a wider approach, Gibbs' equations, considered as the historical basis of the revisit and extension elaborated by Gaggioli [4,5], encompass the chemical potential and maximum work obtainable from an (open) chemical system, as also described by Kotas [7]. From another standpoint, Gyftopoulos and Beretta debate the equality of chemical potential (total potential) as an additional necessary condition for mutual stable equilibrium between system and reservoir, together with the equality of temperature. The conclusion is that the perspective envisaged by these Authors, considering the importance of chemical processes in industrial production and the environmental context, may suggest a topic for a more far-reaching investigation of chemical exergy and its components, as well as the related implications for the whole framework of the generalized exergy concept [19].

COMPETING INTERESTS

Author has declared that no competing interests exist.

REFERENCES

1. Palazzo P. Performance optimization of the Carnot and Joule cycles and relationship with the formulation of physical exergy property. British Journal of Applied Science and Technology. 2014;4(2):261-278

- 510 2. Dunbar, WR, Lior, N, Gaggioli, RA: The component equations of energy and exergy.
511 Journal of Energy Resources Technology. 1992;114(75)
512 3. Gaggioli, RA: Available energy and exergy. International Journal of Applied
513 Thermodynamics. 1998;1(1-4):1-8
514 4. Gaggioli, RA, Richardson, DH, Bowman, AJ: Available energy – Part I: Gibbs revisited.
515 Journal of Energy Resources Technology. 2002;124:105-115
516 5. Gaggioli, RA, Paulus, DM Jr: Available Energy – Part II: Gibbs extended. Transaction
517 of the ASME. Journal of Energy Resources Technology. 2002;124:110-115
518 6. Gaggioli R. The Dead State. Proceedings of the 25th ECOS Conference, Perugia,
519 Italy. 2012
520 7. Gyftopoulos EP, Beretta GP. Thermodynamics: Foundations and Applications. Dover
521 Publications, Mineola, New York; 2005.
522 8. Kotas TJ. The Exergy Method of Thermal Plant Analysis. Krieger Publishing
523 Company, FL, USA; 1995.
524 9. Moran MJ, Sciubba E. Exergy analysis: principles and practice. Journal of Engineering
525 for Gas Turbine and Power. 1994;116:285-290
526 10. Hatsopoulos GN, Keenan JH. Principles of General Thermodynamics. Wiley; 1965.
527 11. Sandler SI. Chemical and Engineering Thermodynamics. 3rd edn, New York, Wiley;
528 1999.
529 12. Gonzalez-Ayala J, Angulo-Brown F. Some remarks on Carnot's theorem. Proceedings
530 of the 25th ECOS Conference, Perugia, Italy. 2012
531 13. Agrawal D, Menon VJ. The Carnot cycle with the Van der Waals equation of state.
532 Eur. J. Physics. 1990;11:88-90.
533 14. Tjiang P, Sutanto S. The efficiency of the Carnot cycle with arbitrary gas equation of
534 state. 2006;27:719-726.
535 15. Palazzo P. Thermal and mechanical aspect of entropy-exergy relationship.
536 International J. of Energy and Environmental Engineering. 2012;3:4: ISSN: 2251-6832
537 16. Tsatsaronis G, Morosuk T. Advanced exergetic analysis of a refrigeration system for
538 liquefaction of natural gas. International J. of Energy and Environmental Engineering.
539 2010;Vol.1/No.1:1-18
540 17. Tsatsaronis G, Morosuk T. Advanced exergy-based analyses applied to a system
541 including LNG regasification and electricity generation. International J. of Energy and
542 Environmental Engineering. 2012;3:1
543 18. Manfrida G, Ignesti, M. A gas turbine submarine isobaric CAES peak load power plant
544 with heat recovery and storage. Proceedings of ECOS 2009
545 19. Palazzo P. Proposal for generalized exergy and entropy properties based on stable
546 equilibrium of composite system-reservoir. Journal of Modern Physics. 2013;4:52-58
547 doi:10.4236/jmp.2013.47A2008
548