

Assessment of Hydrological Properties and Proximate Impact of Septic Tank Leachate on Well-Water Quality in Two Residential Areas in Ibadan, South-western Nigeria

ABSTRACT:

Aims: To determine the impact of leachate from septic tank on proximate well-water quality in two different residential areas and the variation in the physico-chemical parameters of the well-water that are associated with spatial geographical location.

Study design:

Randomized monthly collection and analysis of well-water over four months in two chosen residential areas.

Place and Duration of Study:

Residential houses at Agbowo and Akobo, Ibadan, Nigeria between April and August, 2012.

Methodology: The well-water samples were collected from 30 sites once every month, from different wells located at various perimeters from the septic tanks. The distance between the septic tanks and the wells were measured and the water subjected to physico-chemical analysis and bacteriological assessment to evaluate their qualitative, spatial and temporal variations.

Results: A significant increase ($p < 0.01$) was found in results from coliform counts between dry and wet seasons, while significant decrease ($p < 0.05$) was recorded in the concentration of phosphate, salinity, total dissolved solids and potassium. The distance from the well to the septic tanks exhibited a negative correlation with coliform count ($p < 0.05$), as well as for phosphate, nitrate, chlorine and ammonia ($p > 0.05$). The Discriminant Chi square ($X^2 = 62.526$, $p < 0.01$) and Wilk's Lambda (0.058) revealed a significant discrimination between the two study sites. Partial Eta Squared value of 0.740, 0.382 and 0.137 were reported for location, proximity of septic tank to well-water site and well depth respectively, showing their degree of contribution to variation in parameters measured.

Conclusion: The results stressed the need to set standards concerning the distance and location of wells from septic tanks/septic tank, while considering spatial and temporal variations in hydrological environment of well-water sites.

Keywords: Well-water quality; Water Quality Index; Physico-Chemical variation; Septic tank; Bacteriological assessment.

1. INTRODUCTION

As population grows and urbanization increases, more water is required and greater demand would be placed on ground and surface water [1]. The rate of urbanization in Nigeria is alarming as the major cities are growing at rates between 10-15% per annum [2]. The human activities associated with such growth (including soil fertility remediation, indiscriminate refuse and waste disposal, and the use of septic tanks, soak-away pits and pit latrines) are on the increase, with concurrent increase in underground water pollution.

Groundwater contributes only 0.6% of the total water resources on earth, yet, it remains the major source of drinking water in Nigeria, as in every part of the world [3]. Ideally, potable water sources must be highly pure and free from chemical and microbial contamination. However, this useful resource is under threat of pollution from human activities as evident in low level of hygiene practices [4-6], and lack of recommended 'safe distance' between well-water/borehole and septic tank sites in Nigeria. In view of this, monitoring the chemical, physical, and microbiological quality of groundwater is as important as assessing its quantity [7].

The two main contributors to the variations in the biogeochemical composition of groundwater are weathering processes and anthropogenic inputs [8]. Rapid increase in population, changes in life style, changes in living conditions and domestic waste management system [9] in Nigeria have resulted in a dramatic increase in the potential infiltration of extraneous materials into the groundwater environment [10]. In recent times, the impact of leachates on groundwater and other water sources has attracted a lot of attention because of its overwhelming environmental significance; hence,

protection of groundwater is now an important environmental issue [11-12]. Leachates from septic tanks and other municipal sewage contain variety of chemicals like detergents, germicides, complex organic compounds and metals. Besides, human effluent composite and water contaminated with these sewage effluents may contain pathogenic organisms, high load of nitrate, phosphate, ammonia, total dissolve solid and associated complex organic substances which may be hazardous to human health if such water is consumed without treatment [13,14]. Additionally, uncontrolled microbial actions may result in the release of more toxic substances due to cumulative or synergistic effect of previously free or non-reactive component of the waste. Hence, the discharge of wastes from municipal sewers is one of the most important water quality issues worldwide and it is of particular significance to drinking water sourced from shallow water table [13, 15]. During leachate percolation, water present in the waste and those generated by biodegradation serve as vehicle for leachate's vertical and horizontal migration finding its way into the groundwater environment thereby contaminating the groundwater. Survival and dispersal of microbes in the groundwater environment also varies, for instance *Escherichia coli* have been reported to have moved 46 m vertically and 70 m horizontally in an aquifer under favourable conditions, while enteroviruses have been reported in groundwater 183 m from a wastewater point source [15]. Most chemicals found in drinking water are of health concern, though only few of these chemical contaminants have been shown to demonstrate adverse health effects in humans as a consequence of prolonged exposure through consumption [16]. Consequently, evaluation of the microbial, physical and chemical quality of water is an important means of securing potable water for daily consumption. This study seeks to assess the proximate impact of septic tank leachates on the physico-chemical and microbial quality of groundwater in different hydrological settings viz: Agbowo (densely populated) and Akobo (sparsely populated) residential areas of Ibadan, Nigeria. This will provide a baseline information towards exploring a possible minimum distance that could be recommended for Nigeria, where well-water is the most common water source within the cities.

2. METHODOLOGY

Location and geology of the study area

This study was carried out in Agbowo and Akobo residential areas of Ibadan. Ibadan is located in south-western Nigeria, 160km inland northeast of Atlantic coast of Africa, situated in-between rainforest and savanna. The study areas lie within latitudes 7°25'37"N and 7°26'26" N and Longitude 3°54'25" E and 3°56'50" E (Figure 1). The climate of the study areas is tropically wet and dry, with the wet season from mid-March to October and dry period from November to March. The study was conducted within the Precambrian Basement Complex terrain of southwestern Nigeria [17]. The main lithology of the rock unit include the amphibolites, migmatite gneisses, granites and pegmatites. Other important rock units are the schists, made up of biotite schist, quartzite schist talk-tremolite schist, and the muscovite schists [18].

The topography of the city is characterized by undulating terrain with general elevation between 180 m and 210 m above sea level, and is drained by rivers Omi, among others. Occurrence of groundwater is dependent on the extent of weathered units and development of secondary porosity, e.g. fractures, faults, joints [19]. Consequently, the weathered aquifers are generally discontinuous, with groundwater occurrences in localized disconnected phreatic weathered regolith aquifers, essentially under unconfined to semi-confined conditions [20].

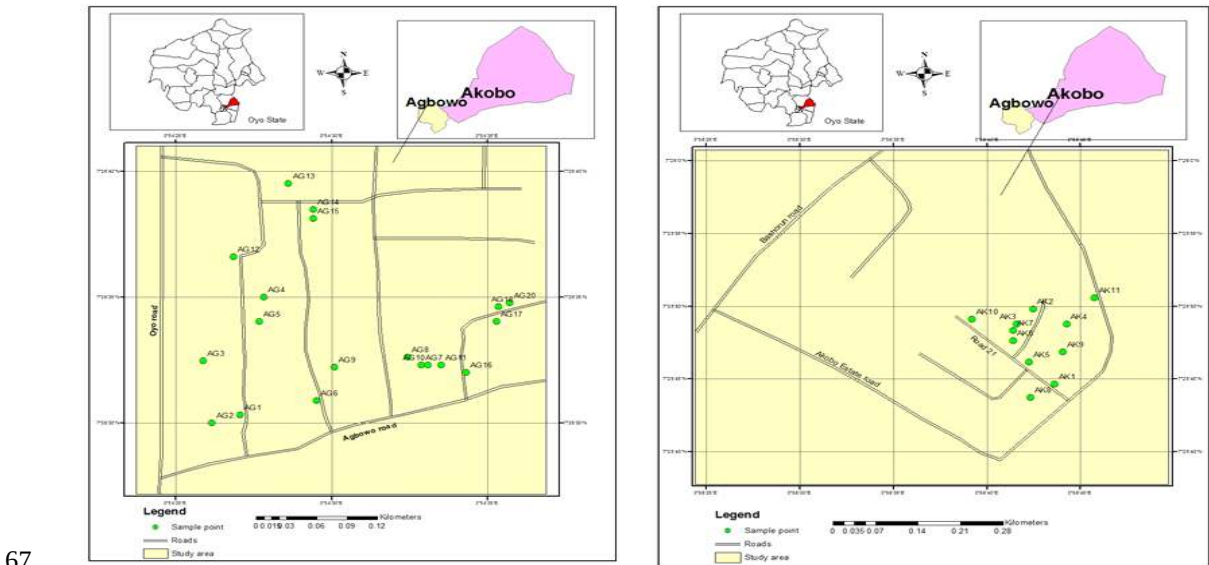


Fig. 1. Map of the study area [A: Agbowo (a densely populated area) and B: Akobo (a sparsely populated area)]

69 **Sample Collection**

70 This study was carried out between April and August, 2012, across wet and dry seasons. Well-water samples were
71 collected from thirty-one locations in the study site. Hand held Global Positioning System (GPS) receiver device with 12-
72 channel tracking and differential correction capability was used to determine and identify location where the water
73 samples were collected.

74 **Quality Assurance Procedures**

75 Samples were collected in plastics that were pre-washed with detergent water solution, rinsed with distilled water and
76 soaked for 48 h in 50% HNO₃, then rinsed thoroughly with distilled deionised water before air-drying. As part of the quality
77 control measures, samples' bottles were rinsed with sample well-water before filling. Samples for Calcium (Ca²⁺),
78 Magnesium (Mg²⁺), Sodium (Na⁺), Potassium (K⁺), Ammonia (NH₄⁺), Nitrate (NO₃⁻), Chloride (Cl⁻) and Phosphate (PO₄³⁻)
79 were refrigerated at 4°C prior to analysis.

80 **Well depth and water level determination**

81 Well depths were determined using graduated tape with added weight and a similar procedure was employed for water
82 level determination.

83 **Determination of physical and chemical parameters**

84 Non-conservable parameters like, pH, Salinity and other parameters like Total Dissolved Solid (TDS), conductivity,
85 temperature (°C), Dissolve Oxygen (DO) and percentage Oxygen (%O₂) were taken immediately at the sampling point
86 using Consort CS-C933 Multi-Parameters Portable meter, Topac Instrument, Inc. USA. Total hardness, Calcium (Ca) and
87 Magnesium were determined by Ethylene Diamine Tetra-acetic Acid (EDTA) method. Flame photometric method was
88 employed in the determination of Sodium (Na⁺) and Potassium (K⁺); Chloride (Cl⁻) was measured by potassium chromate
89 method. Nitrate (NO₃⁻) by Phenoldisulphonic acid method, Phosphate (PO₃⁻⁴) by Ascorbic Acid Method and Ammonia by
90 Indophenols (Colorimetric).

91 **Total Coliform Assessment**

92 Sterile corning tubes were used to collect well-water samples from various sampling sites and were preserved at 4°C prior
93 to microbial analyses. Microbial analyses were carried out within 24 hours of collection. Borosilicate glassware were used
94 in microbiological testing in conformity with Section 9000 of "Standard Methods for the Examination of Water and
95 Wastewater". Dilution bottles were made of resistant Borosilicate glass, with plastic screw caps which were equipped with
96 liners that do not produce toxic or inhibitory compounds when sterilized. McConkey broth with incorporated Bromocresol
97 purple as indicator (LAB M Ltd. UK) was used as the growth media. Sterile syringes were used to introduce 5mL of the
98 broth media (3.5% w/v) into 160/15mm test-tube and small Durham tube inverted inside the test tube (totally submerge) to
99 determine gas production in the sterilized fermentation tube. Series of 100%, 10% 1% and 0.1% of the stock solution of
100 well-water samples (1mL) were prepared with distilled water. The prepared concentrations were introduced into sterilized
101 fermentation tubes.

102 Most Probable Number (MPN)/100 mL were estimated using MPN Index of Standard methods 9221 Standard Total
103 Coliform fermentation technique [21]. A multiple-tube fermentation technique was used for total coliforms (McConkey
104 Broth Medium) and various combinations of positive results from five tubes per dilution were used (10 ml, 1.0 ml and 0.1
105 ml sample portions).

106 **Data Analysis**

107 The bacteriological data were log-transformed to meet the assumption of equal variance which were then subjected
108 to student T-test to evaluate the impact of seasonal variation on coliform density. Correlational analysis were performed to
109 evaluate the extent of the relationship between coliform density, well depth and distance between well and the nearest
110 septic tank point for dry and wet season. Correlation analysis was performed on the parameters measured to evaluate
111 their inter-relatedness. Principal Component Analysis (PCA) was also used to assess the concentration of physico-
112 chemical and bacteriological data from well-water samples, quantitatively determining the minimum number of new
113 variables necessary to reproduce various attributes of the data. Discriminant analysis was performed on the parameters
114 to identify variables that best differentiate the two sampling zones (Agbowo and Akobo). The Water Quality Index (WQI)
115 was determined using the Weighted Arithmetic Index method [22].
116
117

3. RESULTS AND DISCUSSION

3.1 Variable Analysis of well-water samples

The descriptive statistical analysis data presented in Table 1 show the univariate summary of well-water sample analysed during the study period between the month of April and August, 2012. In this study, the distance between well and septic tank ranges from 4 to 30.5m and well depth ranges from 0.25-15m. Well depth in Akobo study area ranges from 4 to 15 m, while Agbowo recorded depth range of 0.25 to 5.5m, indicating an area with high aquifer level. Results for Water Hardness, coliform count, TDS, conductivity and chloride recorded large variances.

Generally, underground water is believed to be the purest source of water [23] because of the purification properties of soil [24]. However, the amount and variation in the level of dissolved materials in underground water is a complex function of interaction between climate, land use patterns, human activity, weathering and the geologic make-up of the hydrologic environment. These functions vary from one geographical area to the other [25]. The result presented in Table 1 shows that the overall water hardness, DO, coliform, distance from nearest septic tank, salinity, TDS, conductivity, ammonia, nitrate, phosphate cluster less around the mean, while, temperature, pH, potassium, calcium, well depth and Percentage Oxygen clustered more. The degree of variation observed in the data structure is in agreement with previous studies [26-27]. A wide variation was observed in the physico-chemical variables of well-water collected from Agbowo and Akobo as shown in Table 1. The mean values for TDS, conductivity, salinity, water hardness recorded for Agbowo (408.01, 766.79, 0.35, 377.25 respectively) were significantly higher when compared with the mean values recorded for Akobo, a low density area (97.58, 181.98, 0.1, 111.50 respectively). The overall evaluation of most parameters however fell below the permissible limit of NESREA; except coliform count and chloride concentration [28].

Table 1. Summary of the descriptive statistics of the entire variable evaluated in Akobo and Agbowo sites.

	Minimum	Maximum	Mean	Std. Deviation	Variance	Skewness	Kurtosis	NESREA
Temperature °C	28.6	31.2	29.3	0.5	0.2	1.8	6.5	
PO ₄ ³⁻ mg/L	7.0	24.0	17.2	4.2	18.0	-0.4	-0.6	45.0
NO ₃ ⁻ mg/L	10.1	60.5	30.3	12.6	158.8	0.3	-0.6	
NH ₄ ⁺ mg/L	11.6	80.9	42.4	19.7	386.6	0.2	-1.1	
Cl ⁻ mg/L	75.0	475.0	2.2	126.9	16100.0	0.4	-0.8	200.0
pH	6.0	7.6	7.0	0.4	0.2	-0.8	1.2	6.5-8.5
Na ⁺ mg/L	0.8	4.1	2.3	0.8	0.7	0.3	-0.3	200.0
Mg ²⁺ mg/L	0.8	3.5	1.8	0.6	0.4	0.9	1.5	150.0
K ⁺ mg/L	0.9	10.5	2.6	1.7	2.8	3.7	17.7	200.0
Ca ²⁺ mg/L	2.0	37.1	10.2	6.9	47.0	2.0	6.9	200.0
Conductivity (µs/cm)	88.1	1340.4	559.0	340.2	116000.0	0.3	-0.7	1000.0
TDS mg/L	51.1	716.0	298.0	180.8	32700.0	0.3	-0.6	500.0
Salinity %	0.1	0.6	0.3	0.2	0.02	0.4	-0.7	
Hardness mg/L	50.0	610.0	283.0	154.7	23900.0	0.3	-0.7	500.0
DO mg/L	0.1	0.7	0.4	0.2	0.03	0.7	-0.8	4.0
%O ₂	1.1	10.3	4.4	2.0	4.1	1.0	1.2	
Coliform MPN/100mL	1.0	1600.0	890.0	633.9	402000.0	-0.2	-1.6	10.0
Distance m	4.0	30.5	16.0	8.0	63.3	0.5	-0.8	
Average well depth m	0.3	15.0	3.9	3.2	10.1	2.2	5.9	

3.2 Coliform count in the dry and rainy seasons

The presence of coliform was confirmed by lactose fermentation and concurrent gas production. There was a strong negative correlation ($r = -0.51$, $P < 0.05$) between coliform count and distance from septic tank for the dry season (Table 2) and the strength of correlation coefficient increased during the raining season ($r = -0.58$, $P < 0.05$) compared to dry season ($r = -0.51$, $P < 0.01$).

The correlation between coliform count and well depth was not significant ($r = -0.16$, $P > 0.05$) but there was an indication of a negative relationship between coliform count and that of well depth in wet season ($r = -0.16$, $P > 0.05$). On the other hand, slightly positive but insignificant correlation ($r = 0.1$, $P > 0.05$) existed between coliform count and well depth during dry season (Table 2). Well-water in Akobo study area recorded a low mean coliform count of MPN 674.14/100mL with higher kurtosis (-1.85) compared with Agbowo which recorded a mean of MPN 1008.00/100mL and -1.20 for kurtosis indicating that well samples coliform count in Akobo clustered less around high MPN value than Agbowo samples

Table 2. Correlation analysis showing relationship between septic tank and well distance and corresponding seasonal changes in coliform density

	Coliform count in dry season	Coliform count in wet season
Distance from well to septic tank	-0.51**	-0.58**
Well depth in dry	0.1	-
Well depth in wet	-	-0.16

**.. Correlation is significant at the 0.01 level (2-tailed).

The result of the microbial analysis shows high levels of coliform contamination in well-water collected in Agbowo. The low well-depth range recorded in Agbowo could account for the high level of groundwater contamination as against what recorded in Akobo. The low sanitation level and hygiene practices [28] and other environmental factors observed in the community [1] may have contributed to the high microbial assessment of Agbowo wells. It was observed that the layout of the buildings in Agbowo were highly clustered and not well planned, resulting in the close distance of well sites to septic tanks and refuse dumps. An extreme observation involved cases in fenced neighborhoods where wells were ignorantly sited at close proximity to the septic tank of the neighbouring house. This might have affected the reported high value of Coliform density observed in site AG2 with $> \text{MPN}1600/100\text{mL}$ and it supports the report on human waste contamination of groundwater by USEPA [29].

The negative correlation obtained between total coliform count and distance from the nearest septic tank and well-depth (Table 2) suggests that the total coliform decrease with increasing well distance and well depth. This is in agreement with the findings of Adekunle *et al.* [30] and Adetunji and Odetokun [1] and also in agreement with the fact that soil filtration potential increased with distance both vertically and horizontally. However, the vulnerability of groundwater to particulate pollution is a function of the ease with which particulate and dissolve solutes can move with water and the attenuation capacity of the intervening materials [31]. The filtering capacity of soil as intervening materials will therefore depend on the soil properties and the distance between pollutant source and receiving water and also the properties of the pollutant. Previous studies [31] revealed that coliform could travel distance of 70.7m from sewage trenches intersecting groundwater while covering a distance of 30.5m within 35hrs when travelling through sand and pea gravel aquifer. Francy *et al.* [32] also confirm an association between proximity of septic tank to well water site, well depth and coliform density.

3.3. Variation in well water physico-chemical properties

A paired sample Student T-test (Two tailed) comparing mean differences that exist in microbial and physico-chemical parameters of well-water sample in the dry season (April) and wet season (Average of value obtained between May and August) was determined (Table 3). The result shows that there was significant increase of coliform count between the dry season and wet season. ($T = -3.401$, $P < 0.01$) and pH ($T = -3.566$, $P < 0.01$), while there was a significant decrease in the concentration of phosphate ($p < 0.01$), salinity ($P < 0.05$), TDS ($P < 0.01$), potassium ($P < 0.01$) and sodium ($P < 0.01$), conductivity ($P < 0.01$) and ammonia ($P < 0.01$).

Table 3: Seasonal (Dry and wet season) changes in Physico-Chemical and Microbial Parameters

Parameters compared	Mean	T	Df	Sig. (2-tailed)
Coliform count	-328.27	-3.40**	30	0.00
Percent Oxygen	-0.73	-1.11	30	0.28
Dissolve Oxygen	-0.07	-1.38	30	0.18
Hardness	14.61	1.06	30	0.30
Salinity	0.02	2.50*	30	0.02
TDS	25.15	3.16**	30	0.00
Conductivity	44.54	2.86**	30	0.01
Calcium Dry	2.72	1.76	30	0.09
Potassium	0.90	8.11**	30	0.00
Magnesium	0.00	0.02	30	0.99
Sodium	0.57	4.40**	30	0.00
pH	-0.15	-3.57**	30	0.00
Chloride	18.45	1.95	30	0.06
Ammonia	8.33	2.33*	30	0.03
Nitrate	1.56	0.86	30	0.40
Phosphate	2.76	7.23**	30	0.00
Temperature	-0.07	-0.28	30	0.78


* P < 0.05 and ** P < 0.01 indicating significant differences between dry season and wet season

The result of monthly variation observed in salinity, TDS and conductivity were as shown in Fig 2, 3 and 4 respectively. There was a significant difference in Salinity ($t = 8.234$, $df = 29$, $P < 0.01$) between samples collected from Agbowo to that of Akobo. The salinity of well-water in Agbowo increased slightly from April to May and later declined through June and July and a slight increase in salinity was later observed in August. In Akobo, there was no obvious fluctuation in the salinity of the well-water (Figure. 2). A significant difference was also observed in the TDS ($t = 8.175$, $df = 29$, $P < 0.01$) and conductivity ($t = 8.206$, $df = 29$, $P < 0.01$) between Agbowo and Akobo study areas. The monthly variation in TDS and conductivity of Agbowo study area followed a similar pattern as that of Salinity. However, TDS and conductivity of well water in Akobo showed a slight decrease from the month of April through July before gaining stability (Fig 3 and 4).

The increased concentration of Salinity, TDS and Conductivity between the month of April to May as shown in Fig. 2, 3, and 4 may have resulted from precipitation enhancing leaching of long term accumulated ionic and non-ionic particles (during dry season) on surface soil [26]. Precipitation also enhanced dissolution of materials naturally present in soil and the introduced water dissolved ionic and non-ionic minerals. The resulting water that moves through the soil to the underlying groundwater will then be enriched with high load of soluble salt [25] and consequently enhance the leaching of septic tank scum into the groundwater environment. The subsequent reduction in salinity, TDS and Conductivity, may have resulted from increased dilution from continuous rainfall during the raining season [26] compounded by human withdrawal of previous solute laden water for domestic use.

The trend in variation of average Salinity, TDS and Conductivity was taken as the prime parameter to focus on monthly variations [33] for Agbowo and Akobo study areas.

211

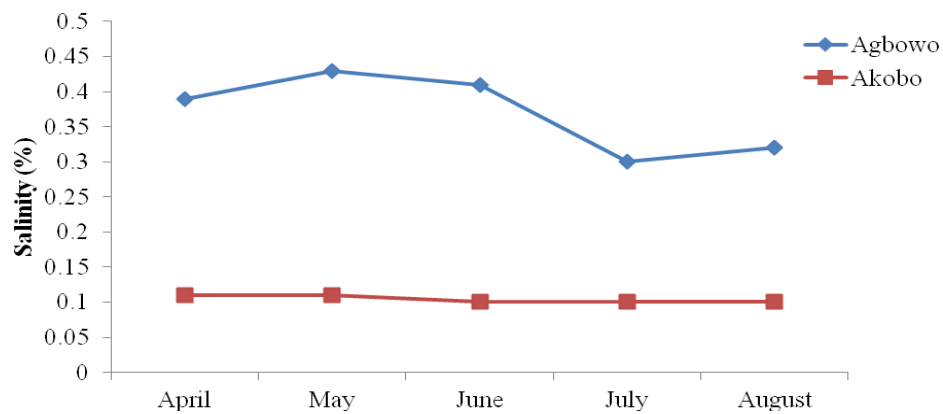


212

213 **Fig. 2. Monthly Variations in Salinity of well water samples in Agbowo and Akobo**

214

215

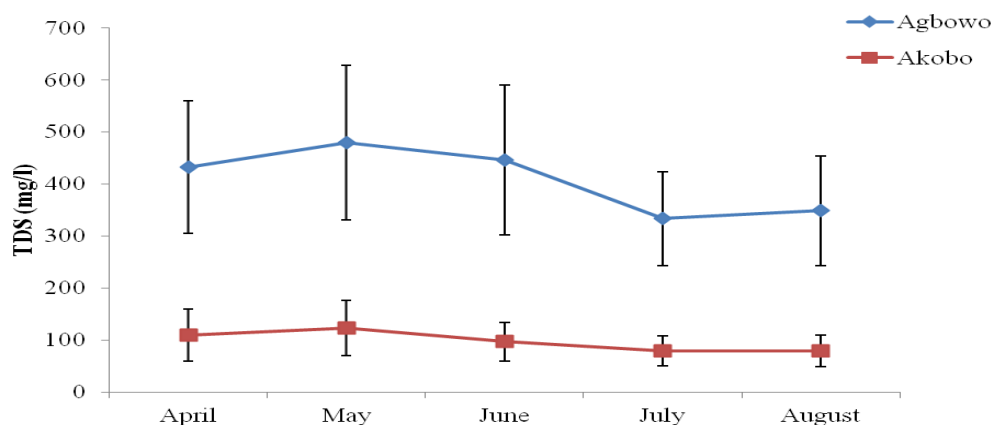

216

217 **Fig. 3. Monthly variations in Total Dissolve Solid (TDS) of well water samples in Akobo and Agbowo**

218

219

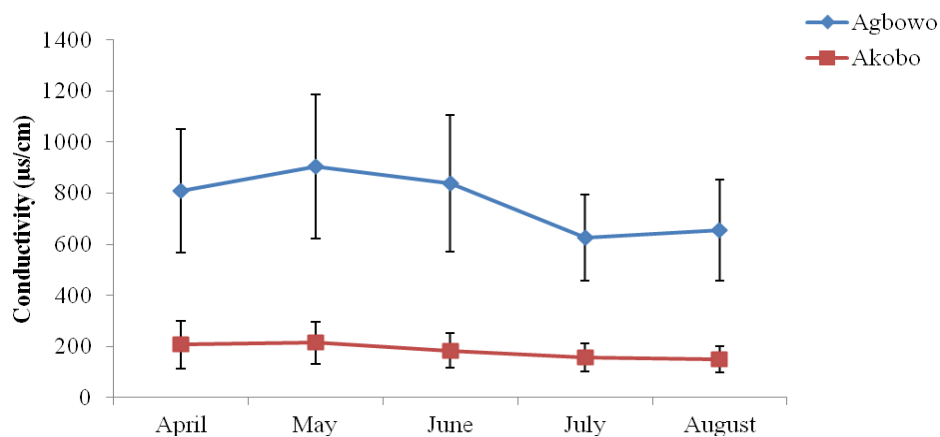


Fig. 4. Monthly variations in Conductivity of well water samples of Akobo and Agbowo

3.4. Inter-relationships of Microbial, Physical and Chemical parameters.

The result of the correlation analysis performed to evaluate the extent of the interrelationship that exists among the assessed variables is shown in Table 4. The correlation matrix revealed that strong positive relationship ($P < 0.01$) existed between phosphate and the following parameters; nitrate, ammonia, chloride, sodium, magnesium, calcium, conductivity, TDS, salinity, and hardness (Table 4). In addition, strong positive correlation ($P < 0.01$) also existed between nitrate and the following; ammonia, chloride, sodium, magnesium, calcium, conductivity, TDS and salinity.

Conductivity and TDS were perfectly correlated ($r = 1.00$) (Table 4). A significant positive correlation ($P < 0.05$) was found between log transformed coliform count and other parameters like phosphate, nitrate, ammonia, sodium, conductivity, TDS and salinity. Well distance from septic tank had a significant negative correlation ($P < 0.05$) with average coliform count, and negative insignificant correlation ($P > 0.05$) with phosphate, nitrate and ammonia (Table 4). Well depth recorded a significant negative correlation ($P < 0.05$) with parameters like phosphate, nitrate, ammonia, chloride, sodium, TDS, salinity and hardness (Table 4a & b).

The positive correlation observed between Coliform count, Phosphate, Nitrate, Chloride and Ammonia in ground water, was in line with previous work that had associated leachate from septic tank impacting on the concentrations of these variables concurrently [34-35]. The presence of coliform in the groundwater had been reported to indicate contamination by human and animal faeces [22, 36]. These pathogens may pose a health hazard to infants and people with weak immune systems [36]. The significant variations in coliform count during wet and dry seasons, in relation to distance of well from septic tank and well depth show that run-off and weathering resulting from precipitation during raining season had a positive impact on the migration of coliform from different pollution sources to the receiving underground water.

The strong co-linearity that existed between salinity, TDS and conductivity as expressed in the correlation matrix shows that salinity as a measure of the amount of dissolved particles and ion in well-water sample can account for TDS (measure of all dissolve substances) and conductivity (measure of charged ion or ionic particles) of the water sample. The negative correlation obtained between well distance from septic tank and soluble particles represented by salinity, TDS, conductivity show a possible contamination through leaching from proximate septic tank. This was justified by SWRC [25] findings that discharges from septic systems increased the salinity of the receiving water body. Most salt resulting from these soluble particles do not naturally degrade, and can remain in groundwater for decades [25].

The weak negative correlation that existed between well proximity to septic tank and Nitrate; phosphate and ammonia concentrations may suggest that leachate from septic tank contributed to the increased concentrations of these parameters [37-39]. The strong negative correlation reported for nitrate concentration and well depth agrees with Piskin [40] whose findings indicates that Nitrate concentration decrease with increase in well-depth. Nitrate and Ammonia are by-products of natural break-down of Nitrogen containing organic compounds from human and domestic wastes that accumulate in the septic tank and this is reflected in the observed strong positive correlation between the above two variables.

The negative correlation that was found to exist between well depth and the following variables: phosphate; nitrate; ammonia; chloride; sodium; magnesium; calcium; conductivity; TDS; salinity and hardness further establishes the fact that areas with high aquifer levels are most predisposed to particulate contamination [40]. This may account for the reason why 73.9% of well samples at Agbowo study area, with well depth range (0.25 to 5.5m), were unsuitable for drinking; when compared to Akobo which recorded a well depth range of 4m to 15m with a lower percentage (54.55%) of unsuitable drinking water (Table 9),.

Table 4a: Correlation Matrix showing relationship between variables evaluated.

	DISTANCE [FROM SOAK AWAY] (m)	TEMP (°C)	PO ₄ ³⁻ (mg/L)	NO ₃ ⁻ (mg/L)	NH ₄ ⁺ (mg/L)	CL (mg/L)	pH	Na ⁺ (mg/L)	Mg ²⁺ (mg/L)
Temp (°C)	-0.26	1							
PO ₄ ³⁻ (mg/L)	-0.31	-0.09	1						
NO ₃ ⁻ (mg/L)	-0.33	0.04	0.96**	1					
NH ₄ ⁺ (mg/L)	-0.35	0.00	0.92**	0.95**	1				
Cl ⁻ (mg/L)	-0.81	-0.10	0.90**	0.94**	0.91**	1			
pH	0.23	-0.05	-0.16	-0.17	-0.20	-0.18	1		
Na ⁺ (mg/L)	-0.29	-0.03	0.94**	0.95**	0.94**	0.92	-0.17	1	
Mg ²⁺ (mg/L)	-0.30	0.14	0.90**	0.94**	0.90**	0.90**	-0.22	0.94**	1
PO ₄ ³⁻ (mg/L)	0.13	0.09	0.15	0.247	0.236	0.242	-0.14	0.16	0.28
Ca ²⁺ (mg/L)	-0.013	-0.23	0.80**	0.78**	0.78**	0.83**	-0.16	0.80**	0.73**
Conductivity (µs/cm)	-0.35	-0.02	0.93**	0.95**	0.90**	0.95**	-0.17	0.94**	0.93**
TDS (mg/L)	-0.36	-0.0	0.92**	0.95**	0.91**	0.94**	-0.17	0.94**	0.93**
Salinity (mg/L)	-0.35	-0.02	0.92**	0.96**	0.90**	0.95**	-0.20	0.93**	0.92**
Hardness (mg/L)	-0.32	-0.00	0.96**	0.95**	0.95**	0.95**	-0.19	0.97**	0.96**
DO (mg/L)	-0.21	0.05	0.00	0.02	-0.04		-0.20	0.08	0.08
%O ₂	-0.22	0.04	0.01	0.02	-0.05	-0.03	-0.29	0.08	0.08
Log coliform	-0.61**	0.08	0.43*	0.43*	0.47**	0.37*	-0.30	0.44*	0.35
Well Depth (m)	0.51**	0.17	-0.57**	0.50**	-0.51**	-0.45*	-0.05	-0.43*	-0.38*

*. Correlation is significant at the 0.05 level (2-tailed). **. Correlation is significant at the 0.01 level (2-tailed). DO= Dissolve Oxygen, %O₂= Percentage Oxygen, TDS= Total Dissolve Oxygen

Table 4b. Correlation Matrix showing relationship between variables evaluated.

	PO ₄ ³⁺ (mg/L)	Ca ²⁺ (mg/L)	CONDUCTIV ITY (µS/CM)	TDS (mg/L)	SALINIT Y (mg/L)	HARDNE SS (mg/L)	DO (mg/L)	%O ₂	LOG COLIFO RM COUNT
PO ₄ ³⁺ (mg/L)	1								
Ca ²⁺ (mg/L)	0.18	1							
Conductivity (µs/cm)	0.25	0.78**	1						

TDS (mg/L)	0.25	0.78**	1.00**	1					
Salinity (mg/L)	0.24	0.78**	0.99**	0.99**	1				
Hardness (mg/L)	0.19	0.81**	0.97**	0.97**	0.98**	1			
DO (mg/L)	-0.13	0.02	0.09	0.1	0.12	0.06	1		
%O ₂	-0.13	0.01	0.09	0.10	0.12	0.06	0.96**	1	
Log coliform count	-0.25	0.39*	0.46**	0.46**	0.46**	0.45*	0.27	0.21	1
Well Depth (m)	0.34	-0.40*	-0.48**	-0.48**	-0.47**	-0.51**	-0.00	0.04	-0.51**

*, Correlation is significant at the 0.05 level (2-tailed). **, Correlation is significant at the 0.01 level (2 tailed). DO= Dissolve Oxygen, %O₂= Percentage Oxygen, TDS= Total Dissolve Oxygen

3.5. Discriminant analysis (DA)

The result of a one-way ANOVA discriminant analysis for the variables in Table 5 shows that temperature DO, pH, K, %O₂ and coliform count failed the tolerance test at 0.001 and did not contribute to the discriminant model classifying the two study area. The Eigenvalue value (16.151) for the first discriminant function accounts for 100% of the variance that exists among the variables obtained from the two study areas and the Chi square test ($\chi^2 = 62.526$, df=30, P<0.01) shows that the difference in the two groups was not just due to chance. The strong canonical correlation of 0.970, low Wilk's Lambda value of 0.058 shows a strong relationship between the discriminant score and the group classification. Predicted group membership (Table 6) shows 100% perfect classification of sampling site based on discrimination between variables observed.

The low Wilk's Lambda value (0.058) reveals the strength of the variable at discriminating between the two study areas in decreasing order: phosphate > nitrate > salinity > conductivity > hardness > TDS > chloride > ammonia > magnesium > sodium > calcium. The standardized coefficients comparing variables measured on different scales downgraded the discriminative ability of phosphate to 5th position while promoting discriminant ability of conductivity, sodium, TDS and hardness above phosphate (Table 5).

Physical parameters like temperature, DO, and %O₂ and coliform count did not contribute to the classification of the study areas. It may be that geographical location with respect to groundwater hydrological properties did not have an influence on the variation in the physical and microbial properties of the groundwater between the two study sites.

The result of the discriminant analysis (Table 5 and 6) shows that differences which exist among variables in the study areas were not only limited to the proximity to septic tank or water level nor due to chance, therefore the significant difference in the hydrologic properties of the two locations might be a contributory factor [41-42].

Table 5. The Standardized Coefficients comparing Variables Measured in the Different Study Sites. ANOVA Tests of Equality of Group Means for Discriminant analysis.

	Wilks' Lambda	F	Standardized Coefficient
Temperature	0.98	0.51	0.20
Phosphate	0.23	95.25*	2.75
Nitrate	0.30	68.46*	-2.17
Ammonia	0.42	40.11*	0.27
Chloride	0.34	55.40*	-0.12
Ph	0.94	1.77	-0.40
Sodium	0.45	35.17*	-4.96
Magnesium	0.45	36.16*	-1.04

Potassium	0.99	0.35	-0.07
Calcium	0.52	26.72*	-0.01
Conductivity	0.30	67.35*	6.23
TDS	0.30	66.84*	-4.25
Salinity	0.30	67.79*	-0.48
Hardness	0.30	67.10*	4.25
DO	1.00	0.12	
%O ₂	1.00	0.09	
Coliform	0.93	2.04	

*Values do not have a significant contribution to the discriminant model. The higher the Wilk's Labda value to stronger the contributory strength of the variable.

Table 6. Predicted group membership.

Predicted Group Membership					
		Grouping	Agbowo	Akobo	Total
Original	Count	Agbowo	20	0	20
		Akobo	0	11	11
	%	Agbowo	100.0	0	100.0
		Akobo	0	100.0	100.0
Cross-validated	Count	Agbowo	20	0	20
		Akobo	0	11	11
	%	Agbowo	100.0	0	100.0
		Akobo	0	100.0	100.0

3.6. Regression Analysis for Multiple Dependent Variables by General Linear Model (GLM)

The result of the GLM Multivariate procedure presented in Table 7 provides regression analysis for multiple dependent variables by factor **variables** (location of the study area) and the covariates (well closeness to septic tank and well depth) based on the model, in which location, distance and well depth **were** assumed to have linear relationships to the physico-chemical parameters and coliform count of the well water. The Pillai's trace for location presented the highest value of 0.74 showing location as the effect that contributed most to the model followed by distance. The closeness of Hotelling's trace (0.159) and Pillai's Trace (0.137) for **the average** well depth showed that well depth **does** not contribute much to the model. Roy's Largest Root showed the degree of contribution to the model as **Location > Distance > Well depth**. The equality of Roy's largest root and Hotelling's trace statistics revealed that the effect is predominantly associated with the strong correlation between the dependent variables. The GLM Partial eta squared presented the practical significance of effect based upon the ratio of the variation accounted for by the effect to the sum of the variation accounted for by the effect and the variation left to error. Partial Eta Squared value of 0.740, 0.382 and 0.137 were reported for location, Distance and well depth respectively (Table 7), showing their **degrees** of contribution to the model in that order.

The multivariate GLM presented in Table 7 conclusively reveals that location contributes more to the variation that exist among physical and chemical parameters of the well water examined, than septic tank proximity to well site and well depth. However, proximity to septic tank has a greater impact on the coliform count. Most of the well water quality in Akobo and Agbowo were below acceptable limit of NESREA [43] except for coliform count and chloride concentration.

Table 7. Regression Analysis for Multiple Dependent Variables by General Linear Model (GLM)

Pillai's trace is a positive-valued statistic. Increasing values of the statistic indicate effects that contribute more to the model. Wilks' Lambda is a positive-valued statistic that ranges from 0 to 1. Decreasing values of the statistic indicate

effects that contribute more to the model. Hotelling's trace is the sum of the eigenvalues of the test matrix. It is a positive-valued statistic for which increasing values indicate effects that contribute more to the model. Roy's largest root **on the other hand**, is the largest eigenvalue of the test matrix. Thus, it is a positive-valued statistic for which increasing values indicate effects that contribute more to the model.

330
331

							Partial
Effect		Value	F	Hypothesis df	Error df	Sig.	Eta Square
Intercept	Pillai's Trace	0.93	74.28	4.00	22.00	0.000	0.93
	Wilks' Lambda	0.07	74.28	4.00	22.00	0.000	0.93
	Hotelling's Trace	13.51	74.28	4.00	22.00	0.000	0.93
	Roy's Largest Root	13.51	74.28	4.00	22.00	0.000	0.93
Distance	Pillai's Trace	0.38	3.39	4.00	22.00	0.026	0.38
	Wilks' Lambda	0.62	3.39	4.00	22.00	0.026	0.38
	Hotelling's Trace	0.62	3.39	4.00	22.00	0.03	0.38
	Roy's Largest Root	0.62	3.39	4.00	22.00	0.03	0.38
Average well depth	Pillai's Trace	0.14	0.87	4.00	22.00	0.50	0.14
	Wilks' Lambda	0.86	0.87	4.00	22.00	0.50	0.14
	Hotelling's Trace	0.16	0.87	4.00	22.00	0.50	0.14
	Roy's Largest Root	0.16	0.87	4.00	22.00	0.50	0.14
Location	Pillai's Trace	0.740	15.70	4.00	22.00	0.00	0.74
	Wilks' Lambda	0.260	15.70	4.00	22.00	0.00	0.74
	Hotelling's Trace	2.852	15.70	4.00	22.00	0.00	0.74
	Roy's Largest Root	2.852	15.70	4.00	22.00	0.00	0.74

332
333

3.7. Water Quality Index (WQI)

All the physico-chemical and Microbial parameters analysed were used to calculate the WQI in accordance with the procedure explained in the methodology section. The results of the WQI were presented in Table 8 and 9. Only 16.13% of the sampled well water fall within the excellent water quality range and 9.68% were within the very poor water range; while 74.19% of the sampled well waters were unsuitable for drinking. The quality of the well water collected from the two different study areas have shown that in Agbowo, 73.9% of the water samples collected were unsuitable for drinking, while 54.55% of that collected from Akobo were unsuitable for drinking. High coliform count was the predominant variable

340 responsible for the poor quality of the water sample in Akobo, while high chlorine and coliform count were responsible for
 341 the poor well water quality in Agbowo.

342 **Table 8. Water Quality Index (WQI)**
 343

Location	Coliform count	NO ₃ ⁻	Cl ⁻	Ca ²⁺	pH	Distance (m) between well and septic tank	Water depth in dry season (m)	Water depth in wet season (m)	WQI	Water Quality
AG1	290.00	30.54	199.50	9.72	6.96	13	4	2	305.32 ^D	Unsuitable for drinking
AG2	1600.00	40.48	245.00	14.05	7.00	4	4	3	1619.31*	Unsuitable for drinking
AG3	535.00	26.27	150.00	8.04	7.23	16	3	2	551.13 ^D	Unsuitable for drinking
AG4	1600.00	44.82	355.00	15.30	7.52	10.5	3	2.5	1620.18*	Unsuitable for drinking
AG5	1600.00	35.06	235.00	11.06	7.16	12.3	3	2.5	1617.02*	Unsuitable for drinking
AG6	815.00	27.37	235.00	7.57	6.78	29	5	2.2	831.23 ^D	Unsuitable for drinking
AG7	950.00	32.08	295.00	11.08	7.14	7.5	3	2	966.49	Unsuitable for drinking
AG8	260.00	27.08	215.00	8.14	7.02	7.6	3	1.5	275.97 ^D	Very poor water
AG9	825.00	33.82	255.00	11.39	6.89	4.4	1.5	0.2	840.80 ^D	Unsuitable for drinking
AG10	625.00	35.38	325.00	12.67	7.11	12	4	2.3	641.20 ^D	Unsuitable for drinking
AG11	1050.00	42.41	295.00	14.98	7.01	10	4.5	2.3	1066.71*	Unsuitable for drinking
AG12	1600.00	60.54	430.00	16.09	7.27	5	6	5	1619.22*	Unsuitable for drinking
AG13	1600.00	48.92	475.00	16.81	7.46	15.5	4.5	1.5	1620.72*	Unsuitable for drinking
AG14	1600.00	42.39	430.00	37.11	7.61	25	6	2	1618.79*	Unsuitable for drinking
AG15	1600.00	47.46	465.00	14.61	7.56	24	6	2	1617.44*	Unsuitable for drinking
AG16	1600.00	42.30	315.00	14.66	6.65	24	4	2	1616.51*	Unsuitable for drinking
AG17	8.60	32.92	245.00	9.91	6.72	18	2	0	24.07 ^D	Excellent
AG18	1050.00	34.87	220.00	12.45	7.50	11	1	0.25	1066.25*	Unsuitable for drinking

AG19	920.00	37.13	250.00	13.13	7.27	11	0.5	0	936.83 ^p	Unsuitable for drinking
AG20	31.00	39.16	340.00	13.97	6.63	18	1.5	0	48.66 ^p	Excellent
AK1	7.50	17.45	75.00	5.01	6.89	30	13	12	21.08 ^p	Excellent
AK2	1600.00	18.56	95.00	5.12	6.87	14	6	2.5	1613.83*	Unsuitable for drinking
AK3	1600.00	18.38	75.55	5.11	7.05	8.2	6	2.3	1615.15*	Unsuitable for drinking
AK4	185.00	18.03	75.00	3.83	6.97	22	4	3	201.90 ^p	Very poor water
AK5	360.00	10.06	75.00	2.44	6.01	14.2	8	8	374.75 ^p	Unsuitable for drinking
AK6	1150.00	16.38	80.00	3.47	7.03	13	5	4	1166.62*	Unsuitable for drinking
AK7	900.000	15.41	100.00	2.98	5.99	15	5	4.4	913.29*	Unsuitable for drinking
AK8	1600.00	15.87	75.00	4.08	7.17	16	15	14	1616.83*	Unsuitable for drinking
AK9	2.000	15.82	80.00	2.00	6.77	30.5	15	13	15.75 ^p	Excellent
AK10	10.000	18.42	95.00	4.00	6.45	26	4	3	255.20 ^p	Very poor water
AK11	1.000	15.33	136.00	4.61	6.96	30	15	14	15.80 ^p	Excellent

WQI= Water Quality Index, ^pBelow zone average, *Above zone average. AK= Akobo, AG=Agbowo.
Akobo Average=710.0179, Agbowo Average=1025.191

Nitrate level exceeding the recommended standard (45mg/L) as observed in Wells AG4, AG12, AG13 and AG15 sampled and this has been reported to cause methemoglobinemia in infants [35,36,44-45], thereby rendering the water in these wells unsafe for infant consumption.

Table 9. Standard water quality classification scheme based on WQI value

WQI value	Water Quality	Water sample	Location	Water Sample
<50	Excellent	5 (16.13%)	Agbowo	2 (10%)
			Akobo	3 (27.27%)
50 – 100	Good water	0 (0%)	Agbowo	0 (0%)
			Akobo	0 (0%)
100 – 200	Poor water	0 (0%)	Agbowo	0 (0%)
			Akobo	0 (0%)
200 – 300	Very poor water	3 (9.68%)	Agbowo	1 (5.00%)
			Akobo	2 (18.18%)

>300	Unsuitable for drinking	23 (74.19%)	Agbowo	17 (73.9%)
			Akobo	6 (54.55%)

High level of Chloride observed in all Agbowo sample site (Average 299mg/L against 200mg/L NESREA Standard) has been associated with sewage pollution [22]. Chloride is often chemically bonded with sodium naturally present in soil to form Sodium Chloride which impact salty taste on water. The simultaneous fluctuation in the concentration of some variables may be accounted for by infiltration of rainwater through the porous and permeable unconfined aquifer into shallow water table that enriches the groundwater with dissolved solute taken from surface and subsurface soil. From observation of water conductivity, TDS and salinity decreased immediately after rainfall.

Slightly Low pH level in AK5, AK7 and AK10 well water (below recommended standard 6.5 to 8.5) observed in some sample points in Akobo may be accounted for by the low level of calcium and magnesium concentration in the study area [46].

4. CONCLUSION

In this study, various statistical techniques were used to evaluate quality and variation in physical, chemical and microbial parameters of well-water (underground water) in Agbowo and Akobo in relation to their proximity to septic tank. The results have shown that leachates from septic tank owing to proximity to well-water impact on physico-chemical properties such as nitrate, Ammonia, chloride, Sodium, Magnesium, Conductivities, TDS, Salinity, water hardness, and microbial qualities of the well-water. Precipitation also contributes significantly to the migration of coliforms from various sources to the underground water.

There is therefore a need for biogeochemistry assessment of hydrologic environment before considering siting a well in any location. The results suggest that the minimum standard distance between septic tank and well water will vary with different hydrologic environments and recommend a restriction on digging wells for domestic use in areas of high aquifer levels; rather, boreholes should be an alternative for the provision of potable water in such areas.

COMPETING INTERESTS

"We declare no conflict of interest".

REFERENCES

- Adetunji VO, Odetokun IA. Groundwater Contamination in Agbowo Community, Ibadan Nigeria: Impact of septic tanks distances to wells. *Mal. J. Microbio.* 2011;7: 159-166
- Yusuf KA. Evaluation of Groundwater Quality Characteristics in Lagos-City. *J. Appl. Sci.* 2007; 7: 1780-1784.
- Eluozo SN, Ademiluyi JO, Ukpaka PC. Development of Mathematical Models to Predict The Transport of *E. coli* on Groundwater Influence by Arsenic in Port Harcourt, Rivers State, Nig. *J. Environ. Sci. Water Res.* 2012; 1: 39-45.
- Punmia BC and Jain AK. Wastewater Engineering 2nd Edition, Laxmi Publications (P) Ltd, New Delhi; 1998.
- Akujieze CN, Coker SJ, Oteze GE. Groundwater in Nigeria- a Millennium Experience Distribution, Practice, Problems and Solutions. *Hydrol. J.* 2003; 1: 259-274.
- Ahmed MI. Microbiological Physiochemical Analysis of Groundwater and Its Biological Effect on Population in Saint Katherine, Protectorate Egypt, Thirteenth International Water Technological Conference IWTC; 2009.
- Khodapanah I. Groundwater Quality Assessment for Different Purposes in Eshtehard District, Tehran Iran. *Eur. J. Sci. Res.* 2009; 364: 543-553.
- Chan HJ. Effect of Land Use and Urbanization on Hydrochemistry and Contamination of Groundwater from Taejon Area, Korea. *J. hydrol.* 2001; 253: 194-210.
- World Population Monitoring. Population, Environment and Development, Department of Economic and Social Affairs Population Division, ST/ESA/SER.A/203. United Nations, New York; 2001.
- Lanning A, Peterson EW. Evaluating Subdivisions for Identifying Extraneous Flow in Separate Sanitary Sewer Systems. *J. Water Resour. Prot.* 2012; 4: 334-341.
- Longe EO, Balogun MR. Ground water Quality Assessment near a Municipal Landfill, Lagos, Nigeria. *Res. J. Appl. Sci. Eng. Technol.* 2010; 2: 39-44.

12. Jothivenkatachalam K, Nithya A, Chandra-Mohan S. Correlation Analysis of Drinking Water Quality In and Perur Block of Coimbatore District, Tamil Nadu, and India. *Rasayan J. Chem.* 2010; 3: 649-654.
13. UNEP/WHO. Water Quality Monitoring - A Practical Guide to the Design and Implementation of Freshwater Quality Studies and Monitoring Programmes, ISBN; 1996.
14. Code of Practice Onsite Wastewater Management. Guidelines for Environmental Management. Publication, EPA Victoria, 200 Victoria Street, Carlton; 2013.
15. McCarthy TS, Gumbrecht T, Stewart RG, Brandt D, Hancox PJ, McCarthy J, et al. Wastewater Disposal at Safari Lodges in The Okavango Delta, Botswana. *Water SA.* ISSN; 2004.
16. WHO Guidelines for Drinking-Water Quality. 4th ed. ISBN; 2011.
17. Rahaman, MA. "Recent advances in the study of the Basement complex of Nigeria. Precambrian Geology of Nigeria", A Publication of Geological Survey of Nigeria, 1988; 11-41.
18. Akindele OO. Geology and geotectonic setting of the basement complex rocks in south western nigeria: implications on provenance and evolution, earth and environmental sciences, dr. Imran ahmad dar (ed.), Intech, ISBN: 2011.
19. Asseez, L. O. (1972) Hydrogeology of southwestern Nigeria. *The Nigerian Engineers* 7(1), 22-44.
20. Tijani, M. N. (1994) Hydrogeochemical assessment of groundwater in Moro area, Kwara State, Nigeria. *Environ. Geol.* 24, 194-202.
21. Standard Total Coliform Fermentation Technique, Standard Methods 9221B, 20th Edition; 2003.
22. Amadi AN, Olasehinde PI, Yisa J, Okosun EA, Nwankwoala HO, Alkali YB. Geostatistical Assessment of Groundwater Quality from Coastal Aquifers of Eastern Niger Delta, Nigeria. *Geosciences.* 2012; 2: 51-59.
23. Gordan, M.; Fair, J.; Gever, G. Water Supply and Waste Removal In: Waste Engineering Vol. John Wiley and Sons; 1996.
24. Shittu OB, Olaitan JO, Amusa TS. Physico-Chemical and Bacteriological Analyses of Water Used for Drinking and Swimming Purposes in Abeokuta, Nigeria. *Afr. J. Biomed. Res.* 2008; 11: 285 – 290.
25. State Water Resources Control Board [SWRC]. Groundwater Information Sheet Salinity, Division of Water Quality GAMA Program; 2010.
26. Ali M, Salam A, Ahmed N, Khan BYA, Khokhar MY. Monthly Variation in Physico-Chemical Characteristics and Metal Contents of Indus River at Ghazi Ghat, Muzaffargarh, Pakistan. *Pakistan J. Zool.* 2004; 36: 295-300.
27. Kaur R, Singh RV. Assessment for Different Groundwater Quality Parameters for Irrigation Purposes in Bikaner City, Rajasthan. *Journal of Applied Sciences in Environmental Sanitation*; 2011; 6: 385-392.
28. Bai S, Lung WS. Three-Dimensional Modeling of Fecal Coliform In The Tidal Basin and Washington Channel, Washington, DC. Part A, Toxic/Hazardous Substances and Environmental Engineering. *J. Environ. Sci. Health* 2008; 41:1327-1346.
29. USEPA. National Primary Drinking Water Regulations. Washington, D.C. EPA 816-F-09-004; 2009.
30. Adekunle IM, Adetunji MT, Gbadebo AM, Banjoko OB. Assessment of Groundwater Quality in A Typical Rural Settlement in Southwest Nigeria. *Int. J. Environ. Res. Public Health* 2007; 4: 307-318.
31. Schmoll O, Howard G, Chilton PJ, Chorus I. Protecting Groundwater for Health: Managing the Quality of Drinking Water Sources. WHO/IWA, London; 2006.
32. Francy DS, Helsel DR, Nally R A. Occurrence and Distribution of Microbiological Indicators in Groundwater and Stream Water. *Water Environ. Res.* 2000; 72:152-161
33. Kudaravalli SP, Kuchipudi RKP. Hydrogeological Variations of Ground Water in Different Geomorphic Units of Krishna Eastern Delta, Andhra Pradesh. *Int. J. Eng. Sci. Technol.* 2010; 2: 4007-4012.
34. Entry J, Farmer N. Ground water quality: Movement of Coliform Bacteria and Nutrients in Ground Water Flowing Through Basalt and Sand Aquifers. *J. Environ. Qual.* 2001; 30: 1533 - 1539.
35. WHO. Guidelines for Drinking Water Quality. 3rd. Ed. Vol. 1 Recommendation, Geneva; 2004.
36. Osuinde MI, Eneuzie NR. Bacteriological analysis of ground water. *Nigeria J. Microbiol.* 1999; 13: 47 - 54
37. Spalding RF, Exner ME. Occurrence of Nitrate in Groundwater- A Review. *J. Environ. Qual.* 1993; 22: 392-402.
38. Wilhelm SR, Schiff SL, Robertson WD. Biogeochemical Evolution of Domestic Waste Water in Septic Systems 2. Application of Conceptual Model in Sandy Aquifers. *Groundwater.* 1996; 34: 853-864.
39. Wakida TF, Lerner DN. Non-Agricultural Sources of Groundwater Nitrate: A Review and Case Study. *Water Res.* 2005; 39: 3-16.
40. Piskin, R. Evaluation of Nitrate Content of Ground Water in Hall County, Nebraska. *Groundwater.* 1973; 11: 4-13.
41. Dimitrov D, Velikov B, Machkova M. Cluster and Discriminant Analyses of Groundwater, Hydrochemical Data in North-east Bulgaria, In: Water Down Under 94: Groundwater Papers; Preprints of Papers. Barton, ACT: Institution of Engineers; 1994.
42. Steinhorst RK. Discrimination of Groundwater Sources Using Cluster Analysis, MANOVA, Canonical Analysis and Discriminant Analysis. *Water Resour. Res.* 1985; 21: 1149.
43. NESREA (National Environmental Standards and Regulations Enforcement Agency), National Environmental (Surface and Groundwater Quality Control) Regulations. Federal Republic of Nigeria Official Gazette, Government Notice No. 136. The Federal Government Printer, Lagos, Nigeria. FGP 71/72011/400 (OL 46). 2011; 49: 98.
44. USEPA. National Standard for Drinking Water. United States Environment Protection Agency; 2002.
45. Farrell-Poe K, Jones-McLean L, McLean S. Nitrate in Private Water Wells. Arizona Cooperative Extension SUA; 2010.

- 468 46. Adegbenro PD, Oladele O. Water Quality Issues in Developing Countries –A Case Study of Ibadan Metropolis,
469 Nigeria; In Water Quality Monitoring and Assessment. Edt. Kostas Voudouris and Dimitra Voutsas. InTech Janeza
470 Trdine 9, 51000 Rijeka, Croatia; 2012.
471
472