

1
2
3
4
5
6
7
8
9

Original Research Article

**EFFECT OF CONVERGENT RAYS ON COLIFORM AND
TOTAL CULTURABLE HETEROTROPHIC BACTERIA IN
WATER**

ABSTRACT

The efficiency of convergent ray's disinfection of surface (Rivers) and underground (well and Borehole) water bodies in Choba and Aluu communities in River State, Nigeria; the Coliform and total culturable heterotrophic bacteria count (TCHBC), were examined using convergent ray's concentrator in the Department of Microbiology laboratory, University of Port Harcourt between November, 2012 to December, 2013. The study showed that coliform and TCHBC population had the same logarithmic values at 0 hour and after 2 hour of exposure (1.2 log MPN/100ml and 2.2 log cfu/ml). The Coliform population of the 2 and 4 Litre aliquots decreased from 1.2 and 2.2 to 0.0 log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.1 and 2.2 for 0 hour to 0.9 and 1.2 log cfu/ml after eight (8) hour of exposure. The pH of water samples were as follows; River water 5.0, Well 6.4 and borehole 7.0. The research was able to provide satisfactory and dependable results compared to WHO and EPA drinking water standard with MPN/100ml to be 0.0 log MPN/100ml and 0.9 and 1.2 cfu/ml total culturable heterotrophic bacteria count after 8 hour of exposure compared to 1.2 log MPN/ml and 2.2 log cfu/ml before the convergent ray experiment/exercise; thus, the study justifies the use of convergent rays for water disinfection.

Key words;

Surface and underground water, convergent rays, disinfection, coliform, total culturable heterotrophic bacteria, River State

INTRODUCTION

The presence of coliforms and total culturable heterotrophic bacteria in water is of public health significance. The quality of drinking water is of highest importance and this depends on source and level of contamination. About 80% of diseases

in the tropics for example, cholera, typhoid, diarrheal and dysentery are as a result of water source contamination (Ojo *et al.*, 2011).

In Nigeria, majority of the rural populace do not have access to potable water and therefore depend on well, streams and rivers for domestic use (Shittu *et al.*, 2008). The bacterial quality of ground water, pipe borne water and other natural water supplies in Nigeria, have been reported to be unsatisfactory, with coliforms counts far exceeding the level recommended by W.H.O (Shittu *et al.*, 2008).

Underground water is believed to be the purest known because of the purification properties of the soil however; it can be contaminated due to improper construction, shallowness, animal wastes, and proximity to toilet facilities, sewage, refuse dump sites and various human activities around the water body (Shittu *et al.*, 2008). Environmental Protection Agency (EPA) establishes heterotrophic plate count as a primary standard, which are based on health considerations (Shittu *et al.*, 2008 and EPA, 2003).

The use of solar radiation for water disinfection has proven to be an efficient technique for the inactivation and destruction of pathogenic bacteria (Alejandra *et al.*, 2005). This technology is very well suited for rural communities of low income which do not have access to standard water purification systems, do not boil or chlorinate the water and are only interested in treating the water required for their daily consumption (Alejandra *et al.*, 2005). It was observed that with 95 min exposure to sunlight Beirut, between 0900 and 1400h, a 99.9% reduction of coliform was achieved with 300 min being required for 99.9% inactivation of total bacteria. The minimum exposure time vary with location for reasons related to solar intensity season and geographical location (Ojo *et al.*, 2011 and Acra, 1990). The objective of this work /research is to verify the effect of convergent rays on coliform and total culturable heterotrophic bacteria in River (surface water), well and borehole (underground) water bodies around Choba and Aluu communities in River states, Nigeria.

MATERIALS AND METHODS

STUDY LOCATION

The Research was conducted on Choba river water located in latitude 4°53'53.16'N to latitude 4°53'52.50'N and longitude 6°54'05.63'E to longitude 6°54'04.69', Hassan well located in latitude 4°54'23.20'N to latitude 4°54'23.59'N and longitude 6°54'29.88'E to longitude 6°54'30.41'E and Omoukiri borehole (underground water) located in latitude 4°55'29.38'N to latitude 4°55'29.03'N and longitude 6°55'24.70'E to longitude 6°55'24.43'E respectively all in Rivers State, Nigeria..

SAMPLE COLLECTION AND DESCRIPTION

Water samples were collected very early in the morning from sample location in white transparent containers aseptically and transported to the laboratory for bacteriological and physiochemical qualities analysis.

CONVERGENT RAY EXPERIMENT

Water samples were dispensed into transparent bottles containers, placed in a circular-dish ray concentrator covered with Aluminium foil paper as the reflecting material. Containers with different volumes of water sample were exposed for 0, 2, 4, 6 and 8 hours intervals. The difference between the environmental temperature (Ambient) and water temperature at each interval of exposure in degree Celsius ($^{\circ}\text{C}$), the pH reading was noted for each water sample.

ENUMERATION OF COLIFORM AND TOTAL CULTURABLE HETEROTROPHIC BACTERIA

Determination of bacterial load in the water sample was done in triplicates. Bacterial plate's counts were carried out using spread plate method with Nutrient Agar. This method was based on the serial dilution of water sample which were the pipette into the surface of each sterile plate. About 20ml of molten Nutrient Agar was cooled to 45°C and 0.1ml of water sample was spread. After 24hr of incubation at 35°C , colonies in the plates were counted. The most probable number multiple tube technique was used for coliform enumeration (using MacConkey broth, Eosin methylene blue Agar). Presumptive tubes were confirmed with gram staining and biochemical tests.

RESULTS AND DISCUSSION

Coliform and total culturable heterotrophic bacterial (TCHB) population in the 2 and 4Litre aliquots of River water decreased as the time of exposure increased from zero (0) to eight (8) hours. The Coliform population of the 2 and 4Litre aliquots decreased from 3.3 and 3.4 to 0.0log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.2 and 2.4 for 0 hour to 0.9 and 1.3log cfu/ml after 8 hour (Figure 1). Statistical analysis showed that there was significant difference in population changes between the times of exposure ($P = .05$) while the volumes of water exposed showed no significant difference in the change in population ($P = <.05$).

The logarithmic populations of coliform and total culturable heterotrophic bacteria in both test water volumes decreased with increased time of exposure. The Coliform population of the 2 and 4Litre aliquots decreased from 3.2 and 3.2 to 0.0log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.2 and 2.4 for 0 hour to 1.0 and 1.2log cfu/ml after eight (8) hour of exposure (Figure 2). There was significant difference in population changes between the times of exposure ($P = .05$) while the volumes of water exposed showed no significant difference in the change in population ($P = <.05$).

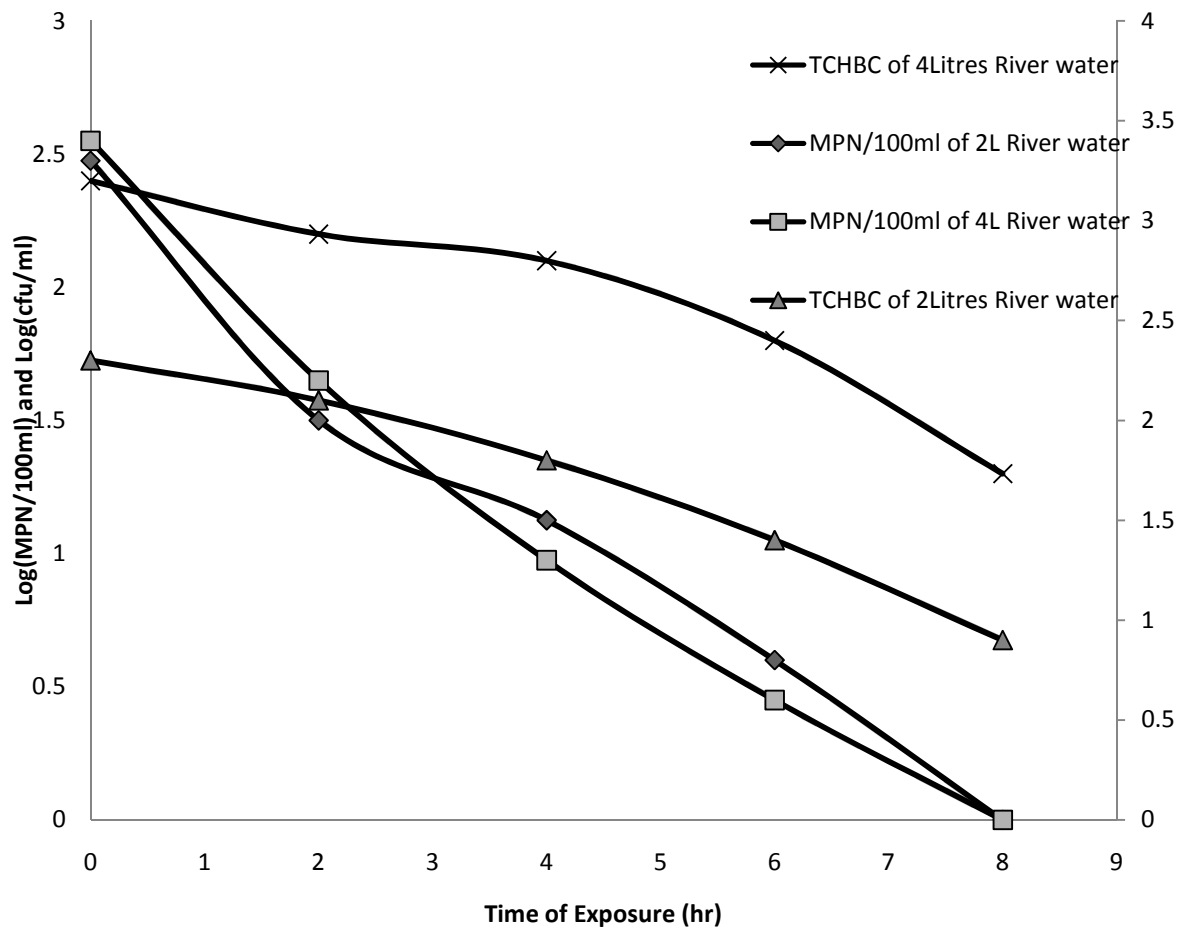


FIGURE 1: RESPONSE OF COLIFORM AND TCHB IN RIVER WATER EXPOSED TO LIGHT RAYS

102
103
104
105
106
107
108
109
110
111
112
113
114
115

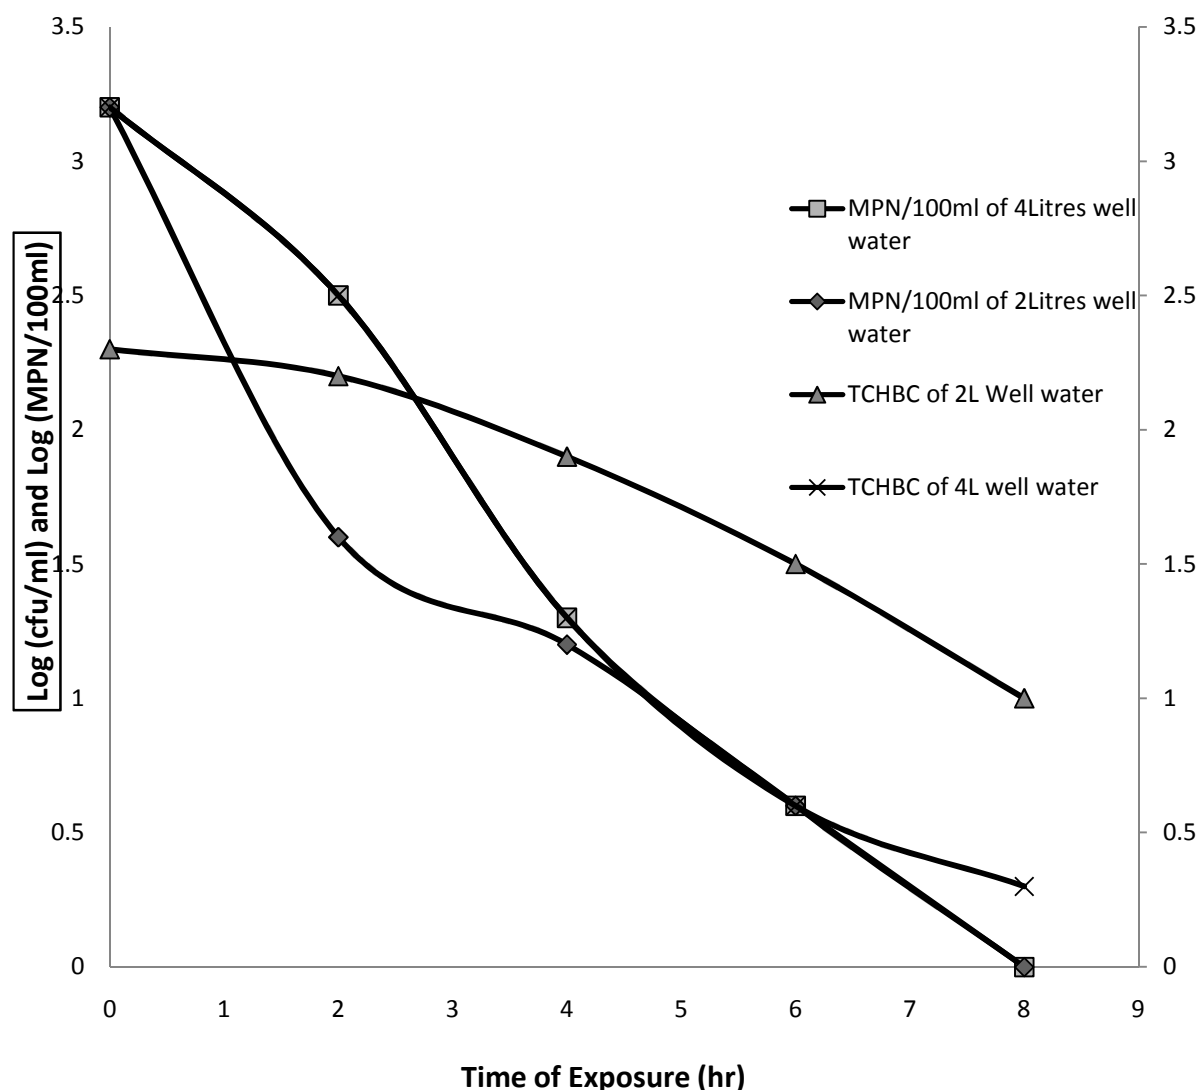


FIGURE 2: RESPONSE OF COLIFORM AND TCHB POPULATION IN WELL WATER EXPOSED TO LIGHT RAYS

The logarithmic values of Coliform and TCHB population of the 2 and 4Litre aliquots decreased from 1.2 and 2.2 to 0.0log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.1 and 2.2 for 0 hour to 0.9 and 1.2log cfu/ml after eight (8) hour of exposure (Figure 3). Statistical analysis showed that there was significant difference in population changes between the times of exposure and the volumes of water exposed ($P = > .05$). The pH of some water samples (Well 6.4 and borehole 7.0) were in agreement with WHO and EPA standard while River water (5.0) did not meet the 6.5-8.5 pH standards for water (Figure 4).

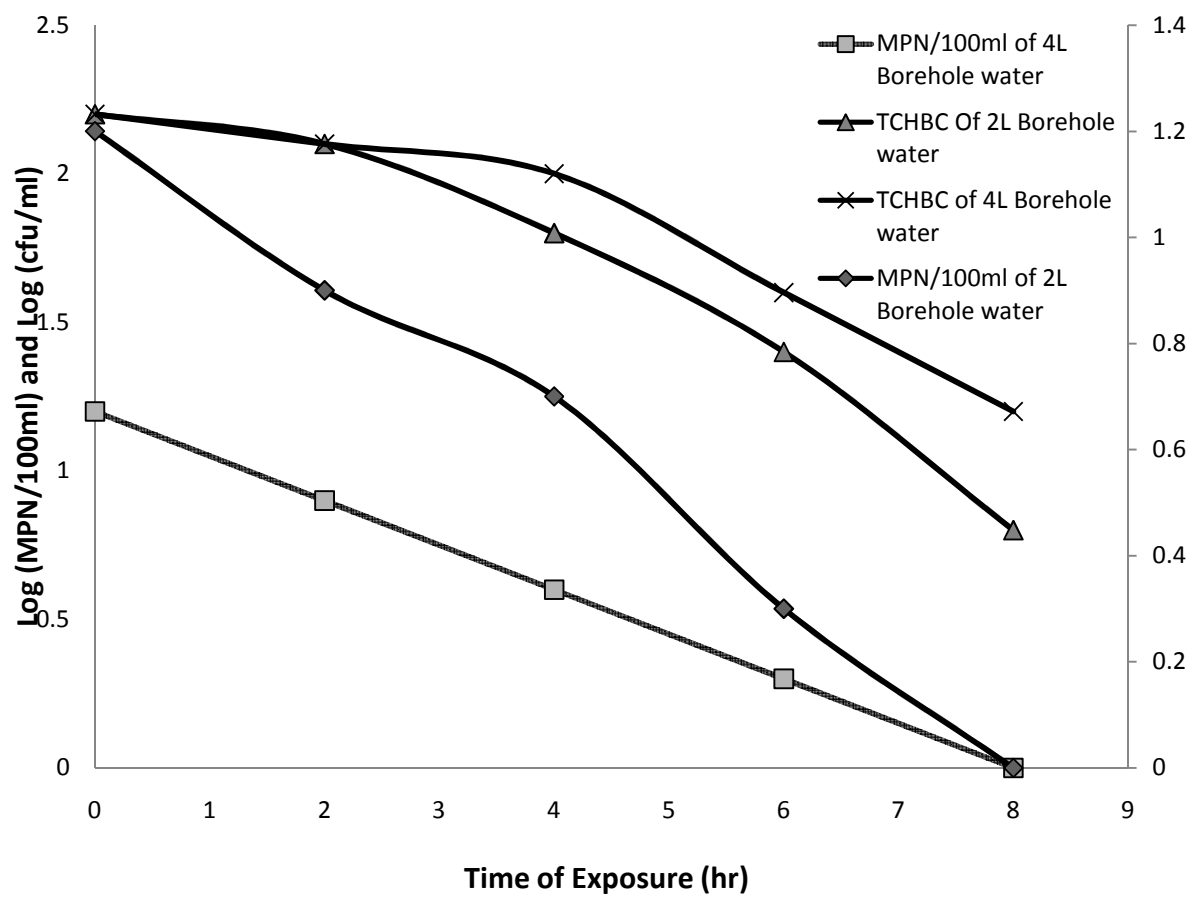


FIGURE 3: RESPONSE OF COLIFORM AND TCHB POPULATION IN BORHOLE WATER EXPOSED TO LIGHT RAYS

126
127
128
129
130
131
132
133
134
135

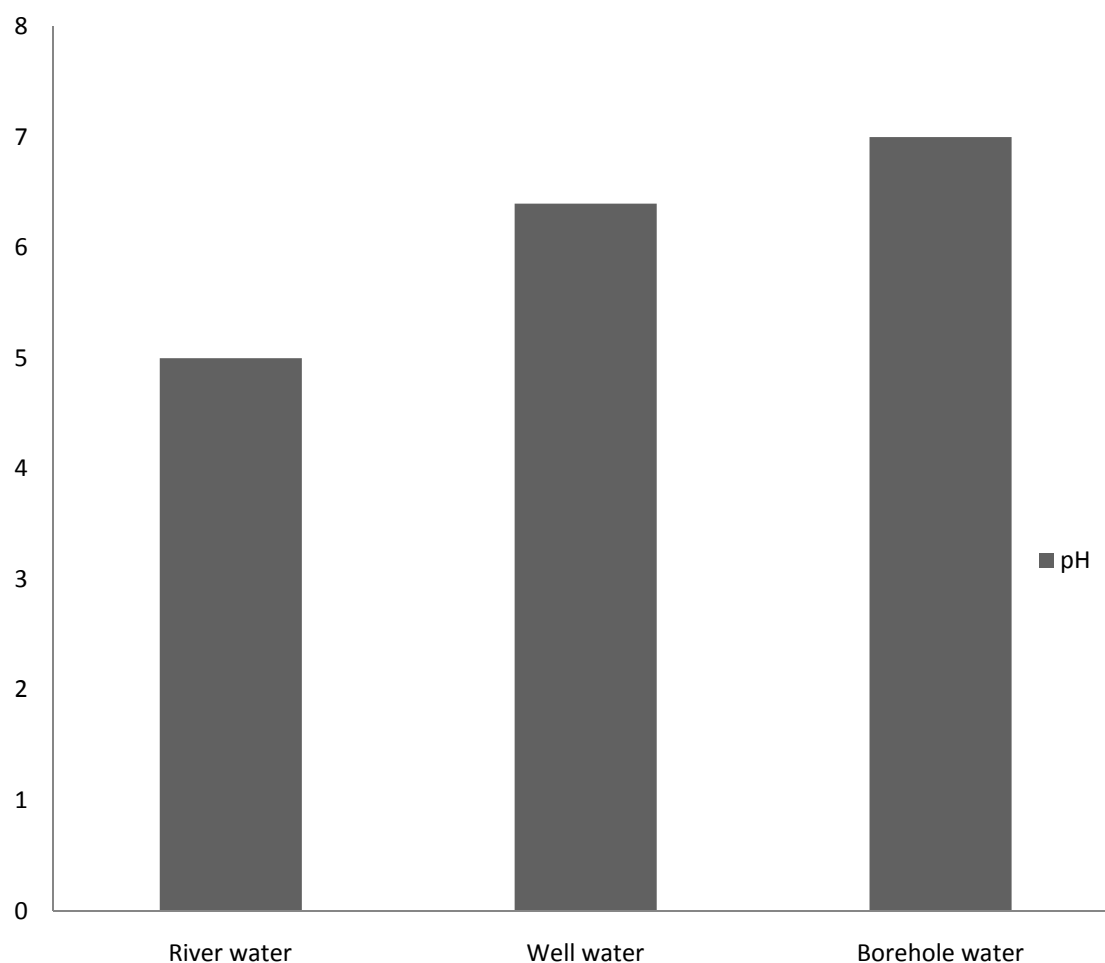


FIGURE 4: pH RANGE OF WATER SAMPLES

Water samples around Choba and Aluu Commu ties of River State, Port Harcourt were sampled during this study. The efficiency and reliability of convergent rays disinfection process was studied using different volumes of water sample exposed to convergent rays at various intervals. Bacteriological parameter such as Coliforms and total culturable heterotrophic bacteria count, (figure 1-3) were studied. Result obtained indicated that the quality of all the Water samples exceeded WHO standard before exposure.

Both Coliforms and TCHB populations decreased as the time of exposure increased from zero (0) to eight (8) hours. Statistical analysis showed that there was significant difference in population changes between the times of exposure ($P = .05$) while the volumes of water exposed showed no significant difference in the change in population as indicated by the $P = < 0.05$. The Coliform population of the 2 and 4 Litre aliquots decreased from 3.3 and 3.4 to 0.0 log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.2 and 2.4 for 0 hour to 0.9 and 1.3 log cfu/ml after 8 hour. This however agrees with the work of Alejandra et al, (2005). He reported that 10^5 microbial populations can be eliminated after 4 hours of solar exposure. Most microbial death was possibly due to the thermal death point.

The logarithmic populations of coliform and total culturable heterotrophic bacteria in both test water volumes decreased with increased time of exposure. There was significant difference in population changes between the times of exposure (P

=.05) while the volumes of water exposed showed no significant difference in the change in population as indicated by the $P = <.05$. The Coliform population of the 2 and 4Litre aliquots decreased from 3.2 and 3.2 to 0.0log MPN/100ml after 8 hour while the total culturable heterotrophic bacterial population decreased from 2.2 and 2.4 for 0 hour to 1.0 and 1.2log cfu/ml after eight (8) hour of exposure. These results strongly agree with Ojo *et al*, (2011). They reported that 99.6% and 99% reduction of bacterial load of water sample was achieved with 2 and 4 litres volume after 8 hour of exposure at temperature of 48°C. It was assumed that thermal denaturing of bacterial DNA occurred at temperatures of 45°C and above.

Coliform and total culturable heterotrophic bacteria in both test water volumes decreased with increased time of exposure. Statistical analysis showed that there was significant difference in population changes between the times of exposure and the volumes of water exposed as indicated by the $P = .05$.

Both Coliforms and TCHB had the same logarithmic values at zero hour and after 2 hours of exposure. Log MPN/100ml was 1.2 and log cfu/ml was 2.2 at zero hour and 0.9 MPN/100ml and 2.1cfu/ml after 2hours. The population decreased as the time of exposure increased. After the final exposure time of 8hours, the logarithmic population of MPN/100ml was zero while the log (cfu/ml) was 0.9 and 1.2 for both test volumes. The populations decreased with increased in exposure time. The complete disinfection of coliforms after eight (8) hour of exposure at 48°C also agrees with Alenjadra *et al*, (2004). They reported that with solar concentrator equipment, 10^5 coliform for each 100ml of water can be eliminated after 4 hour of solar exposure while the 0.9and 1.2 cfu/ml also conform to WHO (1993) and EPA (2003) 1.0×10^2 standard for water. The germicidal action of convergent rays was assumed to be a reflection of the concentration and intensity of light rays. Generally, underground water (borehole) is believed to be the purest known water because of the purification properties of the soil (Shittu *et al*, 2008). However, it can be contaminated due to improper construction, shallowness, and proximity to toilet facilities or sewage (Shittu *et al*, 2008). Borehole water had the least level of contamination from results obtained (figure 3). Total disinfection was achieved after eight (8) hour exposure with 48°C temperature, this strongly agrees with Acra (1990).

The non detection of these pathogens (*Salmonella-shigella* and *Vibro* sp) may be a reflection of the depth of the borehole among several other contributing risk factors (Shittu *et al*, 2008 and Shlegel, 2003).The pH of some water samples (Well 6.4 and borehole 7.0) were in agreement with WHO and EPA standard while River water (5.0) did not meet the 6.5-8.5 pH standards for water (Figure 4).

Other bacteria isolated from the water samples such as *Escherichia* sp, *Staphylococcus* sp, *Bacillus* sp, *Proteus* sp and *Enterobacter* sp are also of public health significance. *Staphylococcus* sp is known to produce enterotoxin (Shittu *et al*, 2008). *Proteus* sp belongs to intestinal flora but is also widely distributed in soil and water (Shittu *et al*, 2008 and Shlegel, 2003). *Enterobacter* sp isolated from the water samples are example of non faecal coliforms and can be found in vegetations and soil which may serves as source by which pathogens enters the water bodies (Shittu *et al*, 2008 and Shlegel, 2003). The presence of coliforms and total culturable heterotrophic bacteria count parameters have been documented as National primary drinking water regulations (NPDWRs) or primary standards which protects public health by limiting the levels of contaminants in drinking water (EPA, 2002).

CONCLUSION

The efficiency and reliability of convergent rays as a water disinfection technique or method cannot be over emphasised. The effectiveness of the treatment process can be achieved after 6 hours of exposure and above using a ray concentrator with a wide area. Bacteriological parameters responded with a decreased in population with increased in exposure time. It

is therefore rational to conclude that, exposure of 2 or 4 litres volumes of water samples in a circular dish ray concentrator for 6 hours and above can be appropriate for the treatment process. Finally this research work has attempted to capture and address the global water scarcity.

REFERENCES

- 1 Acra. A. Destructive Effect of Sunlight on Bacteria in Oral Rehydration Solution Contaminated with Sewag Lancet Dictionary (1990). 1259-1258p
- 2 Acra. A. Jurdi M, Muallem H, Karahagoplan, Raffoul Z. Water Disinfection by Solar Radiation Assessment and Application, *The international development research center* (1990).
- 3 Alejandra Martí'n-Domí'nguez a, Ma. Teresa Alarco'n-Herrera b, Ignacio R Martí'n-Domí'nguez Arturo Gonza'lez-Herrera c Efficiency in the disinfection of water for human consumption in rural communities using solar radiation Elsevier solar Energy (2004). 78, 31-40p
- 4 EPA. US Environmental Protection Agency, Safe Drinking water Act Amendment <http://www.epa.gov/safewater/mcl.html> (2002).
- 5 EPA. US Environmental Protection Agency, Safe Drinking water Act (2003). EPA816-f-03-016
- 8 Ojo, O. I, Ogedengbe, K and Ochieng, G, M Efficacy of Solar water Disinfection for Well waters; Case study of Ibadan slums, Nigeria. International Journals of the physical Sciences (2011). Vol. 6(5), 1059-1067p
- 7 Schlegel, H.G. General Microbiology. 7th ed. Cambridge University Press. (2002). 4080p
- 8 Shittu, O. B., Olaitan, J.O. and, Amusa, T. S. Physicochemical and Bacteriological Analysis of Water used for drinking and swimming purposes in Abuokuta, Nigeria. African Journals of Biomedical Research, (2008). Vol.11, 285-290p
- 9 World Health Organization (WHO). Guidelines for drinking Water Quality, Volume 1 Recommendations, (1993). *Second Edition*, Geneva