

Original Research Article

Contamination of lettuce plants irrigated with waste water from river Avo'o in Yaounde, Cameroon

ABSTRACT

Aims: To evaluate the effects of various treatment combinations of water contaminated with faecal sludge on the growth and microbiological characteristics of lettuce (*Lactuca sativa* L.) cultivated around the river Avo'o discharged zone.

Study design: We used randomized plots in which young lettuce plants obtained from a nursery were planted in four sites (S0, S1, S2 and S3) situated 3000, 810, 100 and 350 m from the raw discharge area along river Avo'o.

Place and duration: Field studies were carried out in Nomayos (Yaounde) during the 2009-2010 growing seasons while laboratory analysis were effected at the waste water research unit of the Department of Plant Biology at the University of Yaounde I.

Methodology: Faecal streptococci, faecal coliforms and parasitic characteristics were determined in raw discharged sludge from river Avo'o water samples collected at three different points (P1, P2, P3) and in lettuce using standard protocols. Growth parameters of the lettuce plants were also evaluated.

Results: Faecal sludge, water from river Avo'o and *L. sativa* showed high levels of bacteriological and parasitological pollutants. The results also revealed high concentrations of faecal coliforms and faecal streptococci (6092 and 3390 CFU/100 ml respectively), and helminth eggs (> 273 eggs / L) in water. Treatment 3 (S3) showed the largest number of leaves with an average of 34.63 leaves in the ninth week for site 1 and 40.33 leaves for site 2. Plant height increased gradually with time and treatments. The mean values of leaf surfaces obtained after nine weeks were 11.5 cm² and 13.99 cm² for treatment S3 in sites 1 and 2 respectively.

Conclusion: Though the best growth of lettuce was observed in plots irrigated with water from river Avo'o, the high levels of parasite concentrations on their leaves (43 eggs/100 g) highlight the necessity for a better management of faecal sludge in Yaounde city.

Keywords: River Avo'o, faecal sludge, irrigation, growth of lettuce, microbial pollutants, Cameroon

1. INTRODUCTION

Excreta management especially around dumping sites in urban areas of most developing countries do not respect standard hygiene and health norms. Thousands of tons of sludge from onsite sanitation systems such as traditional latrines, public toilets, and septic tanks are disposed of without prior treatment in different parts of the world every day [7]. During the last decade, an increasing number of countries explored the possibility of municipal wastewater and sludge reuse [13, 15, 21]. Municipal sludge utilization and the use of wastewater for irrigation are becoming widely practiced not only in countries with water deficit, but also in countries with more temperate climate. The methods and extent of reuse however varies with respect to the local infrastructure and circumstances prevailing in each country. Faced with rapidly growing populations, cities in developing countries are subjected to food insecurity and high levels of unemployment. Urban agriculture, a booming business could be a viable approach to reducing unemployment and ensuring food security, at least, for those in the cities. In effect, many people have taken refuge in the production of vegetables, especially in lowlands and swamps which are floodplains with permanent moisture, rich in organic matter [1, 3, 16]. Several studies have shown the effect of wastewaters on the growth and productivity of plants in various countries around the world [1,4,8]. A study focused on the evaluation of the biomass of several species of *Eucalyptus camaldulensis*, *Acacia cyanophyllus* and *Populus nigra* grown on farmlands irrigated with wastewater revealed that *Populus nigra* plants had the

best growth in height while *Acacia cyanophyllus* manifested the highest growth in diameter [5]. In addition, *Acacia cyanophyllus* produced the greatest biomass followed by *Arundo donax*, while biomass generation was low for *Eucalyptus sp.* and lowest in *Populus nigra*. A recent study tested the feasibility of using wastewater and sludge from secondary sewage treatments plants to irrigate forest plant species of *Pinus brutia* (Greek origin) and *Pinus maritime* [9]. The present research was conducted in Nomayos, a peri-urban area of Yaounde, Cameroon. The aim of the study was to evaluate the effects of various treatment combinations of water contaminated with faecal sludge on the growth and microbiological characteristics of lettuce (*Lactuca sativa* L.) cultivated around the river Avo'o discharged zone by using ordinary water and water contaminated with faecal sludge. The objectives were: (a) to characterize different kinds of water used for the irrigation of *L. sativa* in the study area, (b) to evaluate the growth parameters of the plant, and (c) to evaluate the sanitary risks associated with lettuce produced by farmers in this area.

2. MATERIAL AND METHODS

2.1. Site description

The study site is located in Nomayos, a locality situated 20 km away from Yaounde, Cameroon. The zone serves as an indiscriminate dumping site for sludge collected by vacuum trucks from onsite sanitations in Yaounde (Fig. 1). Sludge is discharged daily into the few wells available (Fig. 1a) or directly on the soils surface (Fig. 1b). The sludge deposited then leaches into rivers near the area of discharge where farmers coincidentally collect water for irrigation of their crops (mostly vegetables).

The work was carried out along the borders of two tributaries of river Avo'o. The site has a surface area of about 300 m² and receives approximately 1350 m³ of untreated faecal sludge per week.



Fig. 1. Partial view of two types of faecal sludge disposal systems at Nomayos, Yaounde. (a) discharge into a well, (b) direct discharge on the ground.

2.2. Methodology

2.2.1. Microbiological tests

Samples of faecal sludge water from river Avo'o and lettuce irrigated with water from this river were collected for different microbiological and parasitological analysis. For this, four (04) points (S0: control site located at Mbankomo, 3 km away from the faecal sludge discharge area; S1: site 1 located 810 m before the faecal sludge discharge area; S2: site 2 located 100 m away from the faecal sludge discharge area and S3: site 3 located 350 m after the faecal sludge discharge area) were mapped out for sampling. The microbiological analysis involved mostly the determination of the presence of faecal streptococci and coliforms using the membrane filtration protocol described by [26]. Parasitological analysis to determine the presence of helminth eggs were carried out using the protocol described by Bailenger and modified by [26].

2.2.2. Evaluation of lettuce growth parameters

Plant height, number of fresh leaves as well as leaf length and width of lettuce plants in the different sites mentioned above were evaluated. Plant height was measured using a double decameter; the number of fresh leaves and number of dead plants were determined by counting while the length of leaves was measured with a caliper.

2.2.3. Data analysis

The ANOVA test was conducted to determine the effects of different treatments applied on the bacteriological, parasitological and morphological parameters of *Lactuca sativa* L.

3. RESULTS AND DISCUSSION

3.1. Microbiological characteristics of water used for irrigation

Analyses of sludge water from river Avo'o and lettuce plants from the study sites revealed the presence of indicators of faecal pollution: faecal coliforms and faecal streptococci (Table 1). Mean values for these bacterial indicators in faecal sludge were 22.86×10^5 CFU/100 ml and 10.68×10^5 CFU/100 ml respectively for faecal coliforms and faecal streptococci. These mean values were 1400 and 370 CFU/100 ml, 3200 and 1480 CFU/100 ml, 4580 and 1540 CFU/100 ml, 1112 and 264.20 CFU/100 ml, 3888 and 1448 CFU/100 ml respectively for sites S1, S2, S3, S0 and the *L. sativa* plant. A very strong Pearson's linear correlation was observed between the levels of faecal pollution indicators in the sludge water from river Avo'o and leaves of *L. sativa*.

Table 1. Microbiological characteristics of samples (n= 33 for each sample)

Sample	CF (CFU/100 ml)	SF (CFU/100ml)
Faecal sludge	$22.86 \times 10^5 \pm 25.47 \times 10^2$	$10.68 \times 10^5 \pm 16.46 \times 10^2$
S0	1112.00 $\pm$ 1013.25	264.20 $\pm$ 189.52
S1	1400.00 $\pm$ 1160.44	370.00 $\pm$ 132.06
S2	3200.00 $\pm$ 2280.77	1480.00 $\pm$ 1200.00
S3	4580.00 $\pm$ 2902.06	1540.00 $\pm$ 1420.56
* <i>Lactuca sativa</i> L.	3888 $\pm$ 1038	1448 $\pm$ 450

S0 : control, S1 : before discharge point, S2: discharge point, S3: after discharge point

*The number of germs for lettuce is expressed in UFC/100 g of leaves

The data obtained reveals very high levels of faecal pathogens in sludge suggesting high levels of pollutants in the raw sludge. Similar results were obtained by [10] working on factors affecting the watering constructed wetlands using faecal sludge in tropical regions. The bacteriological characteristics of water from river Avo'o contaminated with drainage from the Nomayos sludge discharge area revealed pollution levels that were above standard restrictive values recommended for irrigation waters used in the cultivation of edible crops (< 1000 CFU for faecal bacteria and 1 helminth ova/100 g of *Lactuca sativa*) [26]. These values reflect the impact of sludge on environmental pollution. Similar observations were made by [10] who noted that the uncontrolled discharge of excreta in the environment does not respect the principles of ecological and health care especially in developing countries. In addition, these authors described disease (amibiasis, ankylostomiasis, cholera, and typhoid fever) transmission routes: direct contact with faeces during swimming and the consumption of food, especially salads prepared with contaminated water. Waterborne diseases like typhoid fever and diarrhea reportedly affects 32 and 43 % respectively of the Cameroonian population [11].

Wastewater contaminated with excreta can be used in agriculture if such water is treated to avoid contamination since municipal sludge and wastewaters reportedly contains pathogens like bacteria, protozoa, viruses, and helminth eggs [14]. The contamination of lettuce reported in this study is favoured by the irrigation method, mainly sprinkling. However, most farmers use wastewater to irrigate their crops by spraying with watering cans. Several authors have studied the health risk associated with consuming wastewater-irrigated food crops and vegetables [9, 14, 17, 20]. Consumption of such wastewater-irrigated food without respect of proper hygiene can result in waterborne diseases.

3.2. Parasitological characteristics

Mean numbers of helminth eggs in raw faecal sludge were estimated at 3601 eggs/L. In the control site (S0) river Avo'o and the leaves of *Lactuca sativa* irrigated with , the mean number of parasites were 285 eggs/L and 43 eggs/100 g, respectively (Table 2). These parasite concentrations show that faecal sludge is highly polluted and influences the parasitological characteristics of water from river Avo'o and consequently lettuce irrigated with such water. Based on the concentrations of helminth eggs we obtained, the sludge analyzed can be ranked as category A sludge type following the

classification of [22]. The high levels of pathogens in irrigation water obtained in this study indicates a possible public health risk that should be prevented. The reuse of wastewater for irrigation in different agricultural systems is associated with different risk factors. Some risk factors are short term and vary in severity depending on the potential for human, animal or microbial pathogens to have contact with the environment [6, 8]. It is worth mentioning that most common human microbial pathogens found in wastewater are of enteric origin. Uncontrolled use of wastewater in agriculture has significant health implications for farmers and their families, vendors and producer communities as well as consumers in wastewater irrigated areas [2].

Table 2: Mean number of helminth eggs in different samples n= 33 for of each sample

Parasites	Control (eggs/L)	River (eggs/L)	Avo'o	<i>Lactuca sativa</i> L.(eggs/ 100 g)
<i>Ascaris</i> L.	28.33 ± 10.30	540 ± 221		33± 5.61
<i>Enterobius</i> sp.	0	123.33 ±75.5 9		3.7± 1.07
<i>Hookworm</i> sp.	0	141.66 ± 86		4.3± 2.02
<i>Trichuris trichura</i>	3.33 ± 11.5	62.25 ± 25		2± 0.75
<i>Schistosoma</i> sp.	0	13.26 ± 420		0
Mean number				

Ascaris lumbricoides, *Enterobius* sp., *Trichuris trichura*, *Tenia* sp., and *Schistosoma* sp. Were the different species of parasites identified/observed at different sampling points (Table 2). Heterogeneity was observed in the type and number of parasite species recorded at the sampling sites. For example, S0 sample site registered only 02 parasite species: *Ascaris lumbricoides* (28.33 eggs/L) and *Trichuris trichura* (3.33 eggs /L). *Ascaris lumbricoides* was the most represented species with a frequency of 84.16 %. Sites S0 and samples of wastewater from river Avo'o revealed the presence of 05 species of parasites: *Ascaris lumbricoides*, *Enterobius* sp., *Hookworm* sp., *Trichuris trichura*, and *Schistosoma* sp. Average numbers of eggs per liter of samples were 540, 123.33, 141.66, 62.25 and 13.26 respectively for each parasite. The presence of parasites in the water samples collected from river Avo'o can be explained by its proximity to the indiscriminate sludge discharge site. This has a direct influence on the quality of water from the site.

3.3. Evolution of growth parameters

Plant growth is expressed in terms of number of fresh leaves, height of plant and increase in leaf area with time irrespective of the different treatments applied (Fig. 2). There was a significant difference ($P=0.001$) with Student test in the number of fresh plant leaves, height of plant, length and width of leaves between treatments. After nine weeks of treatment, an increase in the growth parameters studied was recorded. Such increases were proportional to the treatment administered from S0 to S3. The use of wastewater resulted in greater number of plant leaves, plant height and leaf area. Treatment 3 (S3) located after the faecal sludge discharge site showed the largest number of leaves with an average of 34.63 leaves for site 1 and 40.33 leaves for site 2 in the ninth week. A gradual increase in plant height was also observed following an increase in time and the different treatments for all investigation sites. The mean values obtained in the ninth week were 11.5 cm² and 13.99 cm² for treatment S3 on sites 1 and 2 respectively. Site 2 yielded plants with the largest leaf surfaces. From the first to the fifth week, growth was similarly irrespective of site or treatment. The rapid increase in these parameters could be explained by the presence of excess nutrients found in faecal sludge, all of which are mineralized and rendered bio-available by bacteria present in the soil [25, 4, 12]. These results corroborate with those obtained by [24, 23] which showed that there exist a relationship between an increase in nutrient concentration in wastewater and absorption by plants for growth. Similar observations were made by [9, 18, 19] while working on the assessment of sewage effluent quality from a sewage treatment plant.

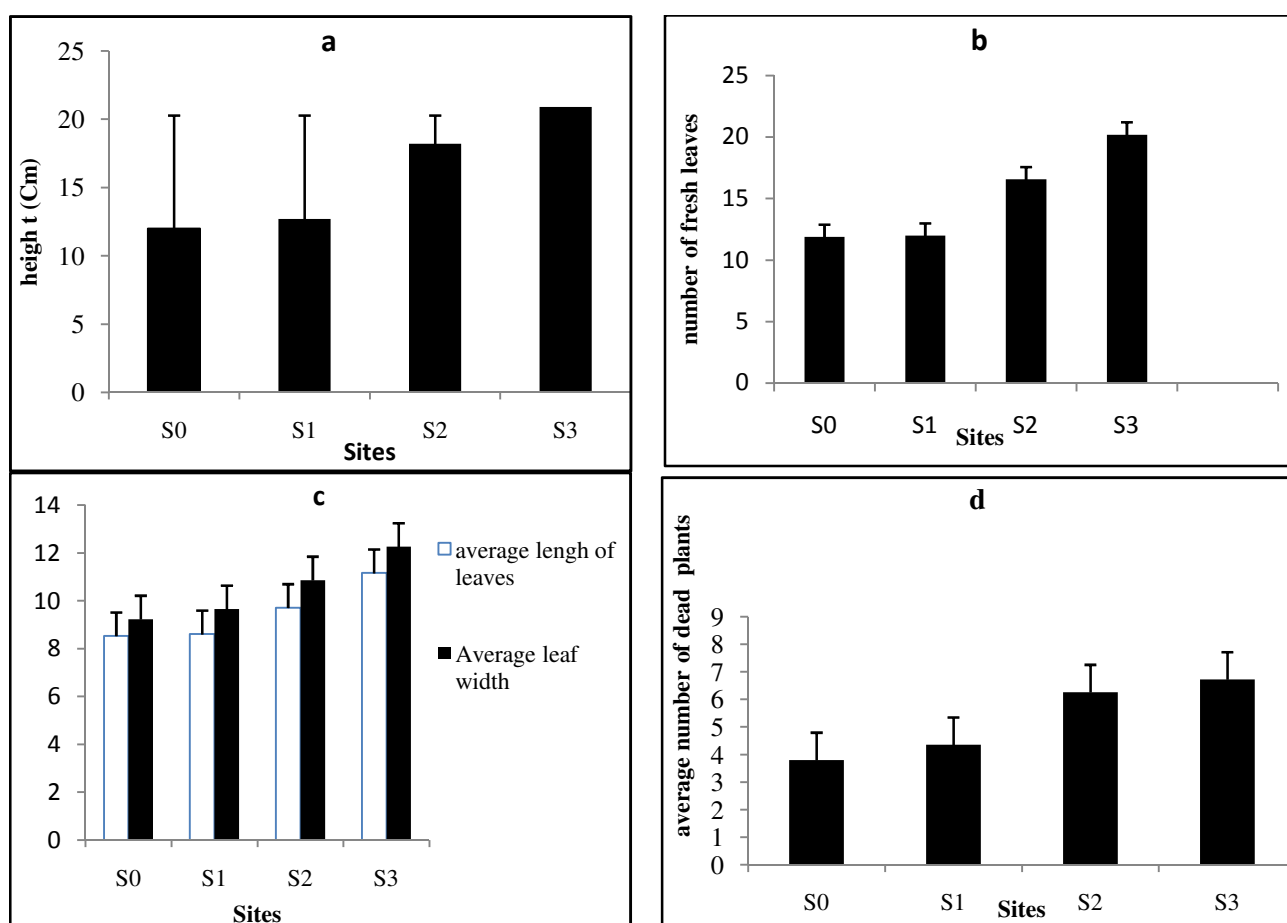


Fig. 2. Evolution of growth parameters of *Lactuca sativa* L. (a: height of plant; b: number of fresh leaves; average length and average width of leaves, d: average number of dead plants).

4. Conclusion

Most pathogens that affect humans are derived from faeces and transmitted by direct contact during swimming for example or orally through the food we eat and the water we drink. The reuse of wastewater contaminated with faecal sludge for irrigation of crops led to higher crop (*Lactuca sativa* L.) growth rates but was unfortunately associated with high concentrations of faecal coliforms, faecal streptococci and parasites on their leaves. Such high levels of pathogenic micro-organisms highlight an urgent need to better manage faecal sludge in this city. This is important in reducing the associated environmental and health hazards.

infectious diseases caused by pathogenic micro-organisms. The necessity to better manage faecal sludge in this city is required for social and environmental health safety.

References

1. Ingallinella AM, Sanguinetti G, Koottatep T, Montangero A, Strauss M. The challenge of faecal sludge management in urban areas-strategies regulations and treatment options. *Water science and Technology*. 2002;46(1):285-294.
2. Mara D, Cairncross S. Guide lines for the safe use of wastewater and excreta in agriculture and aquaculture". WHO, Switzerland; 1989.
3. Mbaye A, Mouster P. Market-Oriented Urban Agricultural Production in Dakar. In: Bukker N. editor. *Growing Cities, Growing Food*. DSE Feldafing Publishing, Germany; 2000.
4. Silvana AC., Rope PP, Jéferson GS, Célia RM, Gilberto S, Fabio C, Tamara MG, Adolpho JM. Parasitological risk assessment from wastewater reuse for disposal in soil in developing countries". *Water Science and Technology*. 2012;65(8):6-12.

- 179 5. Assongmo T. L'occupation et l'aménagement des bas-fonds à Yaoundé: le cas du bassin versant d'Olézoa (Yaoundé).
180 Mémoire de Maîtrise Univ. de Yaoundé; 1990. French.
- 181 6. Delville PL, Boucher L. Les bas-fonds en Afrique tropicale humide. Guide de diagnostic et d'intervention. Ed. Collection
182 Le point sur (Gret) : Ministère de la Coopération - CTA. Paris; 1996. French
- 183 7. Niyitegeka D. Bioindicateurs et pathogènes bactériens des eaux du Mingoa et du Lac municipal de Yaoundé :
184 conditions du milieu, structure des peuplements, répartition spatiale et fluctuation temporelles. PhD Thesis, University of
185 Yaounde I, Cameroon. 2001. French
- 186 8. Fouepe Takoundjou A, Kuitcha D, Sigha Nkamdjou L, Ntonga JC. Impact de la vulnérabilité des ressources en eau de
187 surface sur l'accès à l'eau potable des populations de la ville de Yaoundé: stratégies d'adaptation. Présentation 6eme
188 édition journée entreprise 2IE, Ouagadougou; 2011. French.
- 189 9. Kalavrouziotis IK, Koukoulakis PH, Sakelariou-Makrantonaki M, Papanikolaou C. Effects of treated municipal
190 wastewater on the essential nutrient interactions in the plant of Brassica oleracea var. Italica. Desalination. 2009;(242):
191 297-312.
- 192 10. WHO 2004. World health report 2004: changing history. Burden of disease in dalys by cause, sex and mortality
193 stratum in who regions, estimates for 2002. Genava: world health organization. Available from:
194 <http://www.who.int/whr/2004/en/>(accessed date 27 august 2011).
- 195 11. Kengne IM. Potentials of sludge drying beds vegetated with *Cyperus papyrus* L. and *Echinochloa pyramidalis* (Lam.)
196 Hitchc & Chase for faecal sludge treatment in tropical region. Ph.D Thesis, Univ. Yaounde 1; 2008.
- 197 12. Kramkimel JD, Grifono U, Kabeya Mukenyi R. Profil environnemental du Cameroun. Rapport provisoire. Ed. Ministère
198 de l'Environnement, Yaounde; 2004.
- 199 13. Mara D, Sleigh PA, Blumenthal UJ, Carr RM. Health risks in wastewater irrigation: comparing estimates from
200 quantitative epidemiological studies. J. Water Health. 2007;05(1):39-50.
- 201 14. Petterson SR, Ashbolt N, Sharma A. Microbial risks from wastewater irrigation of salad crops: a screening-level risk
202 assessment". Water Environ. Res. 2001;72:667-672.
- 203 15. Shuval H, Lampert Y, Fattal B. Development of a risk assessment approach for evaluating wastewater reuses
204 standards for agriculture. Water Sci. Technol. 1997;35(11-12):15-20.
- 205 16. Strauss M, Larmie SA, Heinss U. Treatment of sludge from onsite sanitation: low-cost options. 35(6):129-13. Water
206 Science and Technology, 1997;35(6):129-137.
- 207 17. Hass CN, Rose JB, Gerba CP. Quantitative Microbial Risk Assessment. John Wiley and Sons, New York;1999.
- 208 18. Jimenez B, Takasshi A. Water reclamation and reuse around the world. In: Jimenez B, Takashi A, editors. Water
209 Reuse: an International Survey of current practice issues and needs. IWA Publishing; 2008.
- 210 19. Carr R. Who guidelines for safe wastewater use-more than just numbers". Irrig Drain. 2005;54:103-111.
- 211 20. Vymazal J. Types of constructed wetlands for wastewater treatment: Their potential for nutrient removal. In: Backuys
212 Publishers. Transformation of Nutrients in Natural and Constructed Wetlands. Leiden, The Netherlands; 2001.
- 213 21. Djuikom E, Jugnia LB, Nola M, Foto S, Sikati V. Physicochemical water quality of the Mfoundi River watershed at
214 Yaounde, Cameroon, and its relevance to the distribution of bacterial indicators of faecal contamination. Wat. Sci. Tech.
215 2009; 60: 11-18.

- 216 22. Kuitcha D, Ndjama J, Tita Awah M, Lienou G. Kamgang V, Kabeyene Beyala H, Ateba B, Ekodeck GE. Bacterial
217 contamination of water points of the upper Mfoundi watershed, Yaoundé, Cameroon. *Afr. J. Microbiol Res.* 2010;4(7):
218 568-574.
- 219 23. Tripathi BD, Ssrivastava J, Misra K. Nitrogen and phosphorus removal capacity of four chosen aquatic macrophytes in
220 tropical freshwater ponds. *Environ. Conserv.* 1991;18:143-147.
- 221 24. Tanaka H, Asono T, Schroeder ED, Tchobanoglous G. Estimating the safety of wastewater reclamation and reuse
222 using enteric virus monitoring data. *Water Environ. Res.* 1998;(70):39-51.
- 223 25. Rodier J. L'analyse de l'eau ; eau naturelle, eau résiduaire, eau de mer. 9é édition . Dunod technique, Paris; 2009.
224 French.
- 225 26. Seidu R, Heistad A, Amoah P, Drechsel P, Jensen PD, Stenström TA. Quantification of the health risk associated with
226 wastewater reuse in Accra, Ghana: a contribution toward local guidelines. *Journal of Water and Health.* 2006;6(4):461-
227 471.

228