

Are Near Earth Objects the Key to Optimization Theory?

Richard A. Formato^{1*}

¹Consulting Engineer & Registered Patent Attorney
Cataldo & Fisher, LLC
P.O. Box 1714, Harwich, MA 02645 USA

ABSTRACT

This note suggests that near earth objects and Central Force Optimization have something in common, that NEO theory may hold the key to solving some vexing problems in deterministic optimization: local trapping and proof of convergence. CFO analogizes Newton's laws to locate the global maxima of a function. The NEO-CFO nexus is the striking similarity between CFO's D_{avg} and an NEO's ΔV curves. Both exhibit oscillatory plateau-like regions connected by jumps, suggesting that CFO's metaphorical "gravity" indeed behaves like real gravity, thereby connecting NEOs and CFO and being the basis for speculating that NEO theory may address difficult issues in optimization.

Keywords: Central Force Optimization, CFO, Near Earth Objects, NEO, Optimization Theory, Proof of Convergence, Local Trapping, Metaheuristic, Evolutionary Algorithm

1. INTRODUCTION

This note suggests that the theory of gravitationally trapped Near Earth Objects (NEOs) provides an analytical framework for the further theoretical development of Central Force Optimization (CFO). NEO theory may lead to deterministic mitigation of local trapping (a significant problem for many optimization algorithms). It also may lead to a new proof of convergence (a milestone achievement for any algorithm). Applying NEO theory likely requires collaboration between theorists in celestial mechanics and optimization. Hopefully these observations will stimulate that collaboration.

2. METHODOLOGY

CFO locates the global maxima (fitnesses) of a scalar-valued objective function $f(x_1, x_2, \dots, x_N)$ with unknown topology (landscape) defined on an N -dimensional (n -D) decision space (DS). CFO [1-3] is a Nature-inspired metaheuristic like Particle Swarm Optimization and Ant Colony Optimization. But unlike PSO and ACO, it is deterministic instead of stochastic. CFO analogizes gravitational kinematics, thus embracing the metaphor of Newton's precise laws of gravity and motion. Under certain conditions small objects moving through space close to our planet (NEOs) can be gravitationally captured. Such encounters modify the NEO's orbit, at least for a while. In the absence of energy dissipation, orbital changes may persist for some time while the NEO and planet earth conservatively exchange energy. The NEO has been "trapped" in proximity to the earth, and it is this effect that the CFO metaphor embraces. Of course, CFO is an algorithm, a step-by-step procedure for processing numbers. It is not literally, nor is it intended to be, a precise model of how small masses move through space on paths bringing them close to a planet (indeed, the problem of calculating the motion of even three gravitating bodies remains unsolved) CFO thus is a conceptual approach to multidimensional search and optimization, a metaheuristic, drawing its inspiration from gravitational kinematics and, in a

formal way reflecting the equations underlying gravitational motion. But the similarity ends there. CFO also is similar in some ways to gradient-based optimization methods as discussed in [4]. Proofs of convergence for CFO and an extended version have been developed [5,6], and the algorithm has been implemented on a GPU using various topologies [7-9]. The algorithm has been successfully applied to a variety of problems, among them: training neural networks [10]; power grid reliability assessment [11]; drinking water distribution networks [12]; solving nonlinear circuits [13]; array synthesis [14,15]; microstrip patch antenna design [16]; multiband slotted bowtie design [17]; rectangular microstrip patch design [18]; microwave broadband absorber design [19]; antenna optimization generally [20]; notched ultra wideband E-shape antenna design [21]; and increasing impedance bandwidth [22,23].

The NEO-CFO connection is illustrated using two well-known benchmark functions: (1) the n -D step function in 2D (which can be visualized); and (2) the Griewank function in 30D. The step is defined as $f(x) = -\sum_{i=1}^{N_d} \left(\lfloor x_i - x_o^i + 0.5 \rfloor \right)^2$, $-100 \leq x_i \leq 100$ (here $N_d = 2$, $x_o^1 = 75$, $x_o^2 = 30$). The highly discontinuous step is unimodal with a maximum of zero offset to the point (75,30). Figs. 1(a) and (b) plot it over its domain and in the vicinity of the maximum.

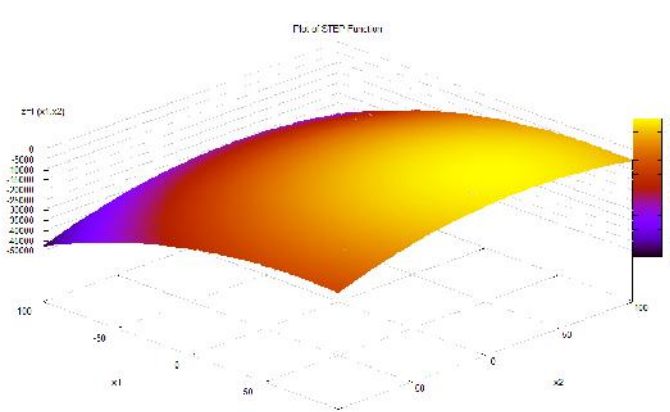


Fig. 1(a)

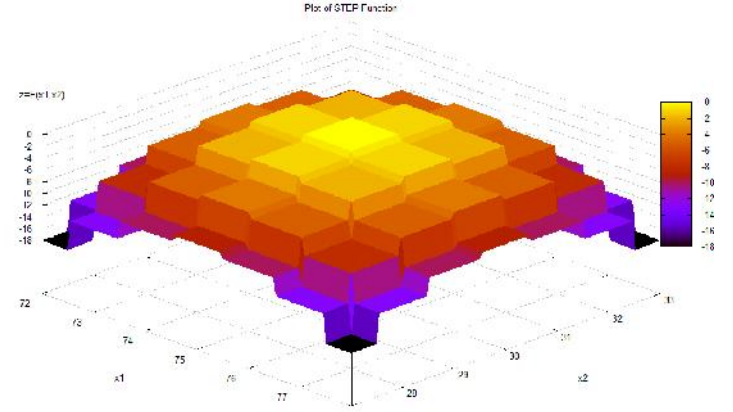


Fig. 1(b)

The 30-dimensional modified Griewank function is defined as $f(\vec{x}) = -\frac{1}{4000} \sum_{i=1}^{30} (x_i - x_0)^2 + \prod_{i=1}^{30} \cos\left(\frac{x_i - x_0}{\sqrt{i}}\right) - 1$, where $-600 \leq x_i \leq 600$, $x_0 = 75.123$. The Griewank's global maximum value is zero at the offset point $x_i = 75.123$, $i = 1, \dots, 30$. This function is extremely multimodal, and one of the most challenging benchmark functions because the number of local maxima increases exponentially with increasing decision space dimensionality [24]. In addition, offsetting the maximum from the origin ($x_0 = 0$) to a substantially distant point ($x_0 = 75.123$) makes it even more difficult to locate the global maximum (it appears that an offset is uncommon in the literature). The Griewank's complexity is illustrated by the 2-dimensional version plotted in Fig. 2 in a truncated region around the maximum.

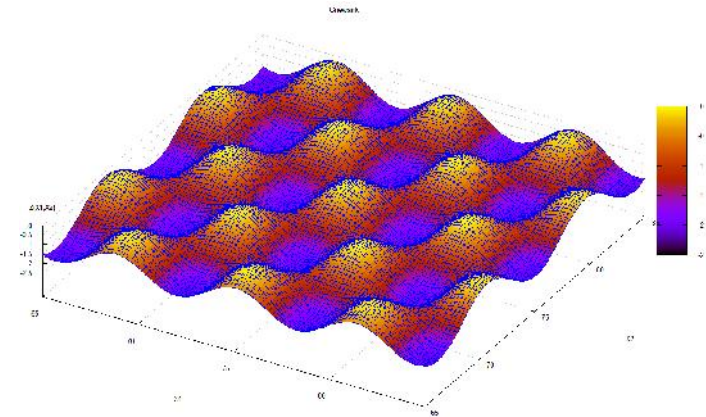


Fig. 2. 2D Griewank near the global maximum

CFO flies “probes” through DS over “time steps” (iterations). Their trajectories are computed from two *equations of motion* analogous to the equations of motion for masses moving through space under the influence of real gravity. CFO “mass” is created by defining a function of the objective function’s fitness. The equations of motion for the probes’

acceleration and position vectors are $\vec{a}_{j-1}^p = G \sum_{\substack{k=1 \\ k \neq p}}^{N_p} U(M_{j-1}^k - M_{j-1}^p) \cdot (M_{j-1}^k - M_{j-1}^p)^\alpha \times \frac{(\vec{R}_{j-1}^k - \vec{R}_{j-1}^p)}{\|\vec{R}_{j-1}^k - \vec{R}_{j-1}^p\|^\beta}$ and

$\vec{R}_j^p = \vec{R}_{j-1}^p + \frac{1}{2} \vec{a}_{j-1}^p \Delta t^2$, $j \geq 1$, where $M_{j-1}^p = f(x_1^{p,j-1}, x_2^{p,j-1}, \dots, x_N^{p,j-1})$, $\vec{R}_j^p = \sum_{k=1}^{N_d} x_k^{p,j} \hat{e}_k$, in which the

$x_k^{p,j}$ are probe p ’s coordinates at time step j , and $\hat{e}_k$ is the unit vector along the x_k axis. Note that $\vec{a}_{j-1}^p \equiv 0$ if

$\vec{R}_{j-1}^k = \vec{R}_{j-1}^p$ to avoid an indeterminate form. Indices $1 \leq p \leq N_p$ and $0 \leq j \leq N_t$ are the probe and iteration numbers,

N_p and N_t being the total numbers. $U(\cdot)$ is the Unit Step, $U(z) = \begin{cases} 1, & z \geq 0 \\ 0, & \text{otherwise} \end{cases}$, and

$MASS_{CFO} = U(M_{j-1}^k - M_{j-1}^p) \cdot (M_{j-1}^k - M_{j-1}^p)^\alpha$. A measure of how well CFO’s probes converge on a maximum is

the average distance between the probe with the best fitness and all other probes at the j^{th} iteration normalized to the

size of the decision space, that is, $D_{avg} = \frac{1}{L \cdot (N_p - 1)} \sum_{p=1}^{N_p} \sqrt{\sum_{i=1}^{N_d} [x_i^{p,j} - x_i^{p^*,j}]^2}$ where p^* is the number of the probe

with the best fitness, $L = \sqrt{\sum_{i=1}^{N_d} (x_i^{\max} - x_i^{\min})^2}$ is the length of the decision space principal diagonal, and

$x_i^{\min} \leq x_i \leq x_i^{\max}$, $i = 1, \dots, N_d$ defines DS (minimum/maximum values of each coordinate).

3. RESULTS AND DISCUSSION

Fig. 3(a) plots the 2D step function’s probe trajectories of the probes with the best fitnesses, while Fig. 3(b) shows the individual probe trajectories ordered by probe number. These plots are visually chaotic, providing no hint whatsoever of the underlying mathematical regularity that forms the NEO-CFO nexus. That regularity appears in CFO’s D_{avg} curve plotted in Fig. 4 (annotated with run parameters). D_{avg} exhibits four oscillatory plateaus connected by jumps. Although the oscillation may not be precisely repetitive, in many cases it is (for example, in this case starting at step 162 D_{avg} comprises the repeating sequence 0.6859416, 0.6917107, 0.6868708, 0.6952526, 0.6855014, 0.6956451, 0.6859433, 0.6917887, 0.6868326, 0.6859393, 0.6877515, 0.6939823, 0.6870971, 0.6956298, 0.6859431, 0.6866136, 0.6872625, 0.6940363, 0.6861267, 0.6953240, which presumably repeats indefinitely). Oscillation in D_{avg} appears to be a reliable signal of local trapping (determined empirically). In this case, CFO is trapped at a local maximum of -1 at (75, 28.57142857). Trapping caused CFO to miss the global maximum, often a problem with deterministic algorithms.

For the 30D Griewank function, CFO returns a maximum fitness of -0.0030385 at step 151, and its D_{avg} curve is shown in Fig. 5. The oscillatory plateaus connected by jumps seen in the step function’s D_{avg} curve again are evident in this plot, and it is this characteristic that connects CFO to NEO’s. CFO’s D_{avg} curves under trapping are structurally similar to the ΔV curve for a gravitationally trapped Near Earth Object. The similarity is obvious from Fig. 6, which plots asteroid Apophis’ ΔV curve (reproduced from [25] with permission) computed by Professors Andrea Milani and Andrea Caruso using the theory of resonant returns [26] (private communication, Astronaut “Rusty” Schweickart). ΔV is the velocity change needed to avoid earth impact, and D_{avg} is a similar variable because it is proportional to velocity if Δt is

constant. Another example of this effect using the Space Gravitational Optimization (SGO) benchmark function is described in detail in [27].

Apophis' ΔV curve in Fig. 6 contains two well-defined oscillatory plateaus connected by a jump and what appears to be the beginning of a third plateau, also connected by a jump, that is cut off by the vertical line marking earth impact in year 2036. The structural similarity to D_{avg} in Figs. 4 and 5 is striking. Both the D_{avg} and ΔV curves comprise oscillatory plateaus connected by jumps, and it is difficult to imagine that their similarity is accidental. Rather, because the Apophis plot is based on real gravity trapping the asteroid in earth orbit, and D_{avg} is based on CFO's metaphorical gravity trapping a probe at a local (possibly global) maximum, it seems reasonable to speculate that the similarity actually may be inevitable.

4. CONCLUSION

The unanswered question raised by this note is, Why are CFO's D_{avg} and an NEO's ΔV curves so similar in structure? Is it pure coincidence, which seems highly unlikely, or is it a consequence of CFO's gravitational metaphor reflecting gravitational kinematics as they affect actual physical objects? If the correct answer is the latter, then this observation is a compelling validation of the CFO gravitational metaphor, as well as the basis for speculating that NEO theory may hold the key to solving important problems in optimization. Hopefully researchers with appropriate skills and interests will find out if it does.

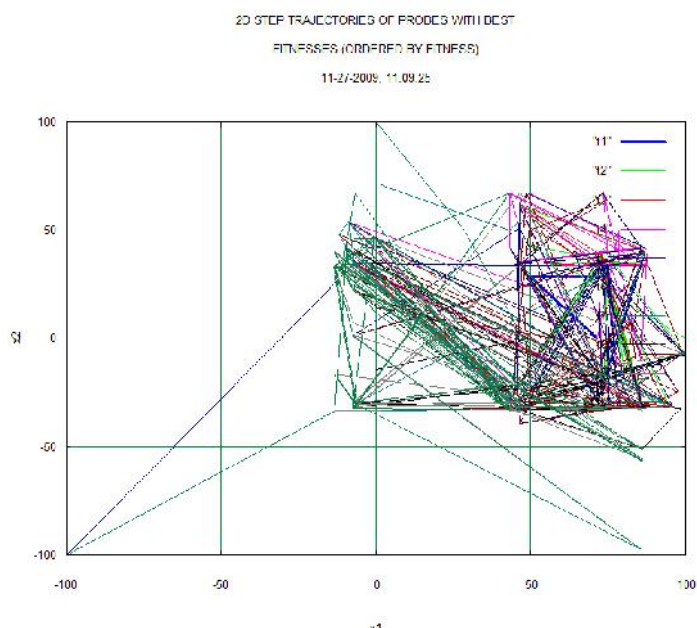


Fig. 3(a). Trajectories of probes with best fitnesses.

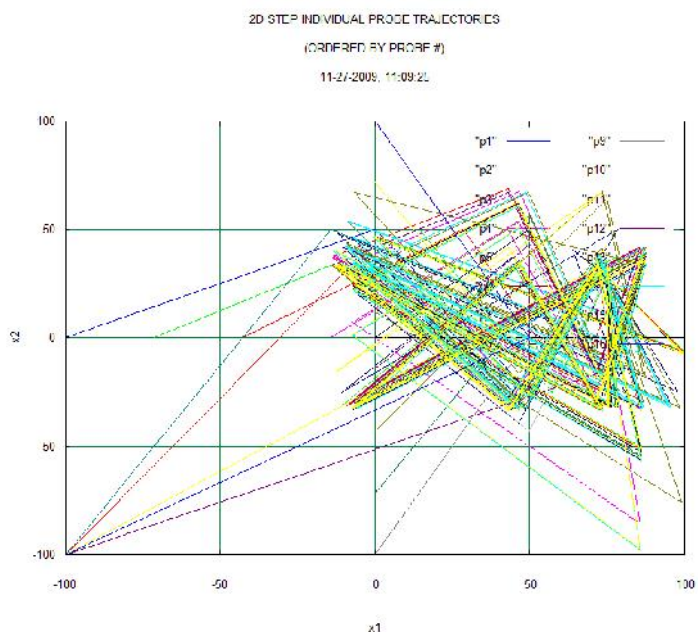


Fig. 3(b). CFO Probe trajectories by probe number.

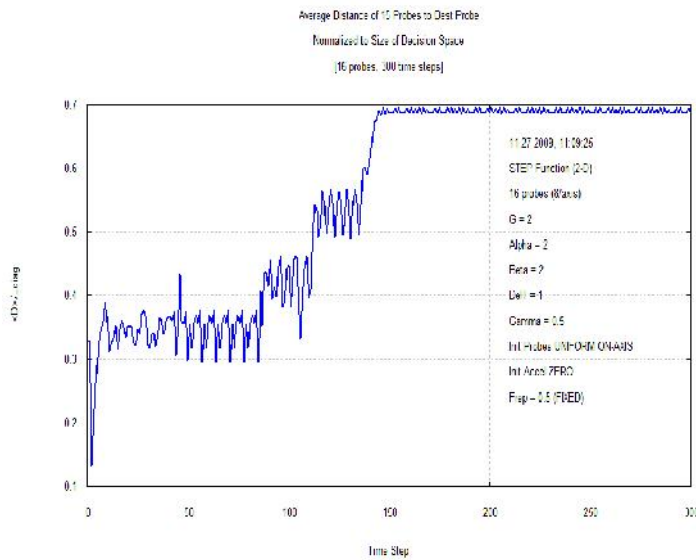


Fig. 4. 2D Step D_{avg} vs. Time Step.

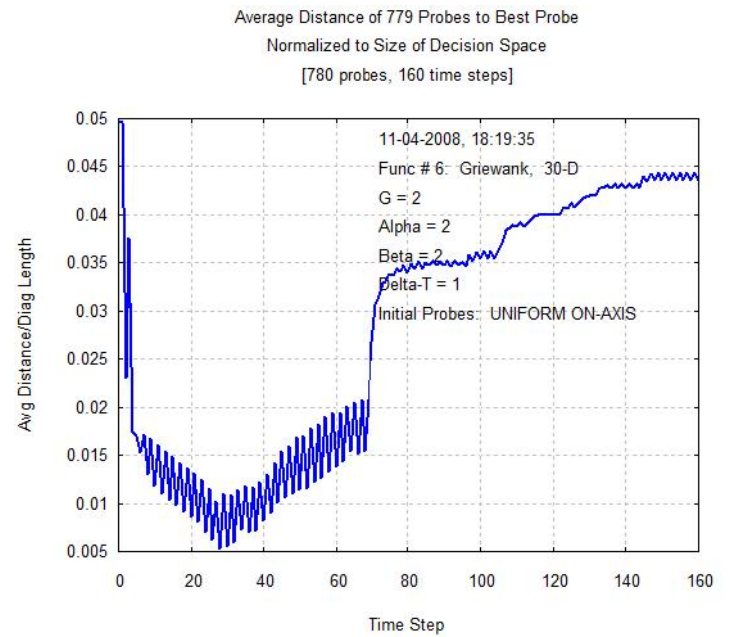


Fig. 5. 30D Griewank D_{avg} vs. Time Step.

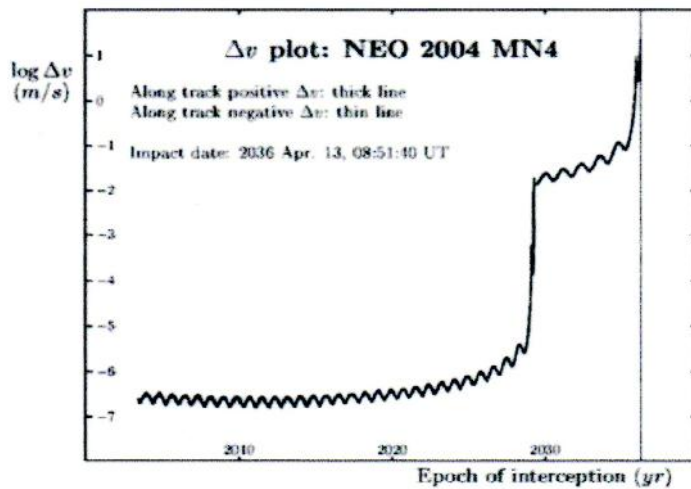


Fig. 6. Asteroid Apophis' ΔV Plot.

REFERENCES

1. Formato RA. Central force optimization: a new metaheuristic with applications in applied electromagnetics. Progress In Electromagnetics Research. 2007;77:425–491.
2. Formato RA. Parameter-free deterministic global search with simplified central force optimization. In: Huang D.-S., Zhao Z, Bevilacqua V, and Figueroa JC, editors. Advanced Intelligent Computing Theories and Applications (ICIC2010), Lecture Notes in Computer Science (LNCS 6215). Springer-Verlag Berlin Heidelberg; 2010.
3. Formato RA. Central force optimization with variable initial probes and adaptive decision space. Applied Mathematics and Computation. 2011;217(21):8866–8872.
4. Formato RA. Central force optimisation: a new gradient-like metaheuristic for multidimensional search and optimisation. Int. J. Bio-Inspired Computation, 2009;1(4):217-238.

5. Ding D, Luo X, Chen J, Wang X, Du P, Guo Y. A convergence proof and parameter analysis of central force optimization algorithm. *Journal of Convergence Information Technology (JCIT)*. 2011;6(10):16-23.
6. Ding D, Qi D, Luo X, Chen J, Wang X, Du P. Convergence analysis and performance of an extended central force optimization algorithm. *Applied Mathematics and Computation*. 2012;219(4):2246–2259
7. Green RC, Wang L, Alam M, Formato RA. Central force optimization on a GPU: a case study in high performance metaheuristics using multiple topologies. *The Journal of Supercomputing*. 2012;62(1):378-398.
8. Green RC, Wang L, Alam M. Evaluating the impact of multiple neighborhood topologies on central force optimization. Online at www.parallelcoding.com.
9. Green R, Wang L, Alam M, Formato R. Central force optimization on a GPU: A case study in high performance metaheuristics using multiple topologies. *IEEE Congress on Evolutionary Computation*, New Orleans, June 5-8, 2011;550–557.
10. Green R, Wang L, Alam M. Training neural networks using central force optimization and particle swarm optimization: insights and comparisons, *Expert Systems with Applications*, 2012;39:555–563.
11. Green R, Wang L, Alam M. Intelligent state space pruning with local search for power system reliability evaluation. *IEEE Power and Energy Society Innovative Smart Grid Technologies Europe*, Berlin, Germany, October 2012.
12. Haghighi A, Ramos HM. Detection of leakage freshwater and friction factor calibration in drinking networks using central force optimization. *Water Resource Management*. 2012;26:2347–2363.
13. Roa O, Amaya I, Ramírez F, Correa R. Solution of nonlinear circuits with the central force optimization algorithm. 2012 *IEEE 4th Colombian Workshop on Circuits and Systems (CWCAS)*, Barranquilla, Colombia, 1-2 Nov. 2012; pp.1-6.
14. Mohammad G, Dib N. Synthesis of antenna arrays using central force optimization. *Mosharaka International Conference on Communications, Computers and Applications, MIC-CPE*, Amman, Jordan, 6-8 Feb. 2009.
15. Qubati GM, Formato RA, Dib NI. Antenna benchmark performance and array synthesis using central force optimization. *IET Microwaves, Antennas & Propagation*. 2010;4(5):583–592.
16. Qubati GM, Dib NI. Microstrip patch antenna optimization using modified central force optimization. *Progress in Electromagnetics Research B*. 2010;21:281-298.
17. Montaser AM, Mahmoud KR, Elmikati HA. Tri-band slotted bow-tie antenna design for RFID reader using hybrid CFO-NM algorithm. *29th National Radio Science Conference (NRSC 2012)*. Giza, Egypt, April 10-12, 2012.
18. Mahmoud KR. Central Force Optimization: Nelder-Mead hybrid algorithm for rectangular microstrip antenna design. *Electromagnetics*. 2011;31(8): 578-592.
19. Asi MJ, Dib NI. Design of Multilayer microwave broadband absorbers using central force optimization. *Progress in Electromagnetics Research B*. 2010;26:101-113.
20. Formato RA. Improved CFO algorithm for antenna optimization. *Progress In Electromagnetics Research B*. 2010; 19: 405-425.
21. Montaser AM, Mahmoud KR, Abdel-Rahman AB, Elmikati HA. Design bluetooth and notched-UWB E-shape antenna using optimization techniques. *Progress In Electromagnetics Research B*. 2013;47:279-295.
22. Formato RA. New techniques for increasing antenna bandwidth with impedance loading. *Progress In Electromagnetics Research B*. 2011;29:269-288.
23. Formato RA. Improving bandwidth of Yagi-Uda arrays. *Wireless Engineering and Technology*. 2012;3(1):18-24.
24. Hamdan SA. Hybrid particle swarm optimizer using multi-neighborhood topologies. *INFOCOMP, J. Comp. Sci., Dept., Federal Univ. of Lavras (Brazil)*. 2008;7(1):36-43; <http://www.dcc.ufla.br/infocomp/artigos/v7.1/vol7.1.htm>.

206
 207 25. Schweickart R, Chapman C, Durda D, Hut P, Bottke B, and Nesvorny D. Threat characterization: trajectory dynamics.
 208 (2006);<http://arxiv.org/abs/physics/0608155>.
 209
 210 26. Valsecchi GB, Milani A, Gronchi GF and Chesley SR, Resonant returns to close approaches: analytical theory,
 211 Astronomy & Astrophysics, 2003;408(3):1179-1196.
 212
 213 27. Formato RA. Central force optimization and NEOs - first cousins? J. Mult.-Valued Logic & Soft Computing.
 214 2009;16:547-565.